


SF 263
.M75
Copy 1

TWO COPIES RECEIVED

NOV 6 1899

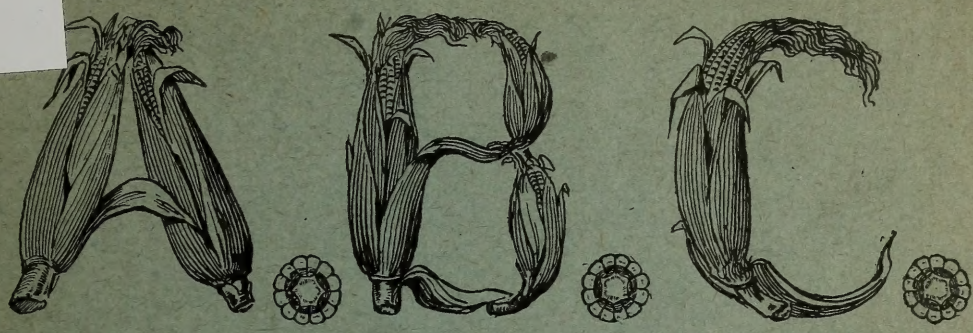

IN



BUTTER MAKING

FOR YOUNG CREAMERY BUTTER-MAKERS,
CREAMERY MANAGERS
AND
PRIVATE DAIRYMEN

BY

J. H. MONRAD


Winnetka, Illinois.

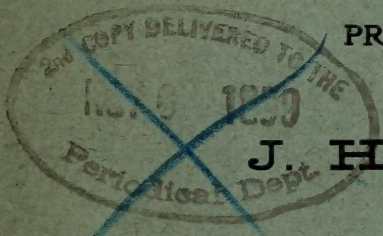

COPYRIGHTED

First Edition


Price 50 Cents

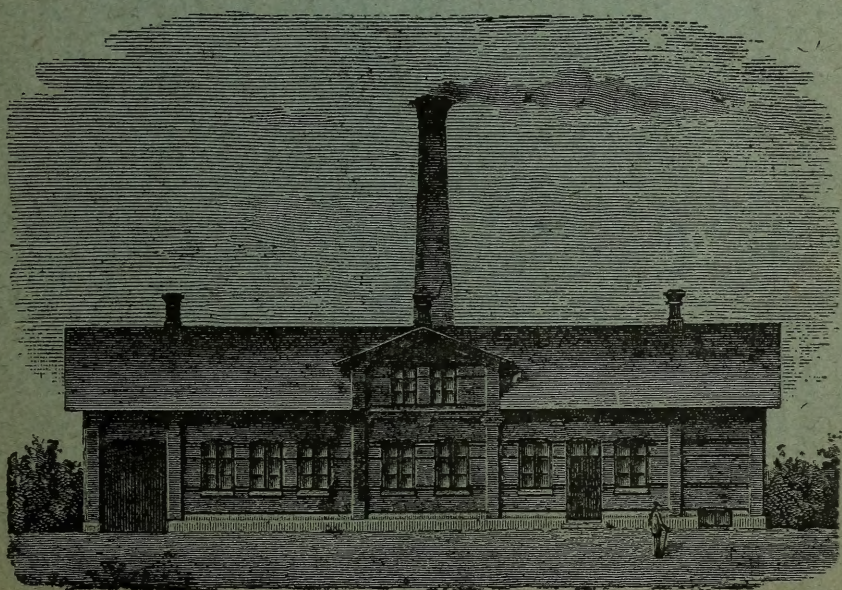

A DANISH CO-OPERATIVE CREAMERY.


Knowledge

of the aggregate results from your herd ought not to satisfy you. Your aim should be to bring the average up to the best results from your best cow. This is up-to-date dairying. What you want is quality, not quantity. In order to intelligently weed out your herd you should have one of our

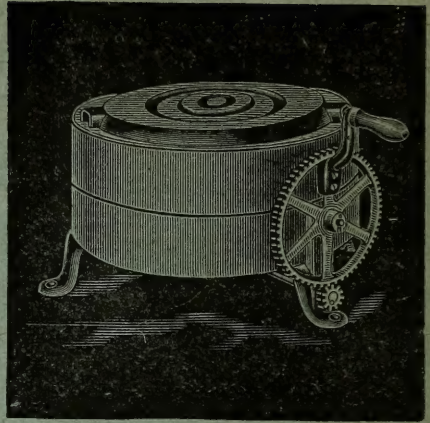

ROE HAND TESTERS

You may be surprised to find that some of your cows which have been "filling the pail" have been filling it with water. Knowledge gives confidence. These are things that it will PAY YOU TO KNOW. Our prices on these Testers are reasonable. Write for them.

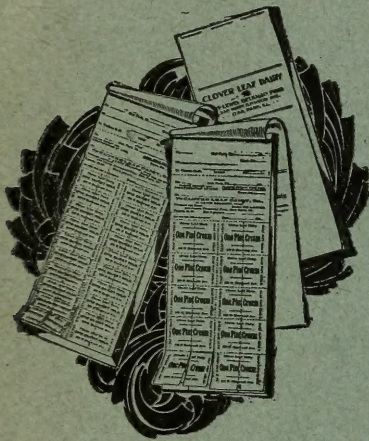

A SANITARY

Milk and Cream Ticket

A coupon milk and cream ticket is the only milk or cream ticket that complies with all sanitary requirements, and is also the only milk ticket by which a complete check can be kept on both customer and driver. We would like to send you a sample.

We have a large, up-to-date and complete line of Milk Dealers' Supplies. Everything you need. Our Ideal Milk Jars and Caps are the best on the market. Write for sample.

Our latest Milk Dealers' Price Current contains new ideas and new apparatus. May we send you one?

Alpha De Laval Separators, Ideal Skim Milk Weighers, Elgin Style Ash Tubs, Spruce Australian Butter Boxes, Ideal Turbine Testers, Stearns' Style Spruce Tubs, Ideal Corrosive Sublimate Tablets, Refrigerating Machinery, Ideal Clansing Powder.

Creamery Package Mfg. Co.

BRANCH HOUSES—


Kansas City, Mo.
Waterloo, Ia.

Minneapolis, Minn.
Omaha, Neb.

1, 3 and 5 W. Washington St.

CHICAGO, ILL.

We are agents for Hansen's Butter and Cheese Color, Renner Extract, also W. & R. Butter Color.

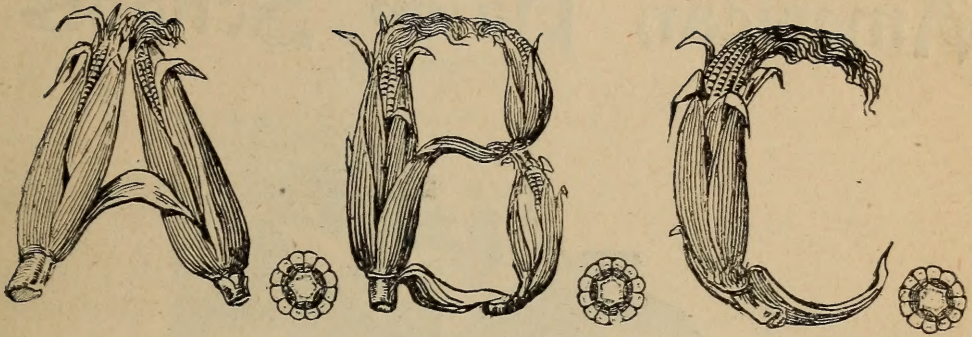

IN

BUTTER MAKING

FOR YOUNG CREAMERY BUTTER-MAKERS,
CREAMERY MANAGERS

AND

PRIVATE DAIRYMEN

BY

J. H. MONRAD


Winnetka, Illinois.



COPYRIGHTED


First Edition

Price 50 Cents

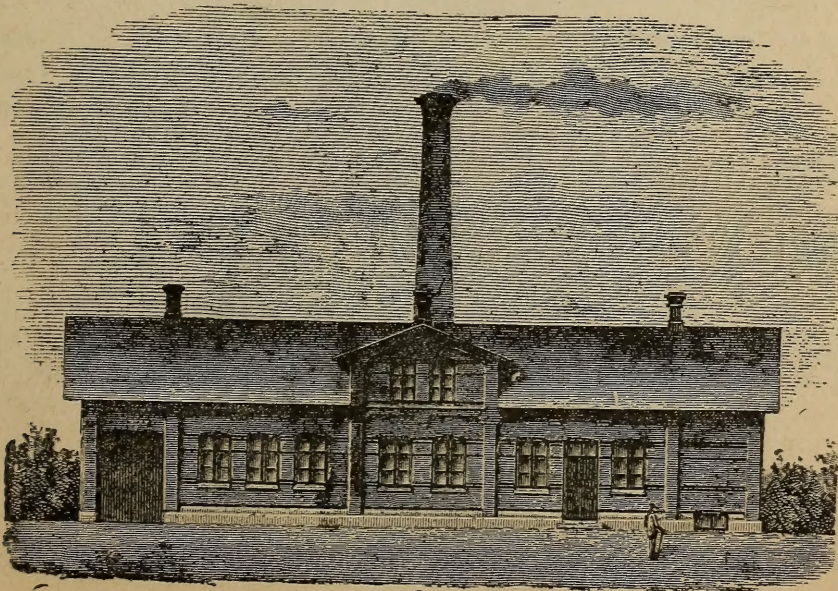


A DANISH CO-OPERATIVE CREAMERY.


48637
THE THREE FIRST
American Dairy Schools

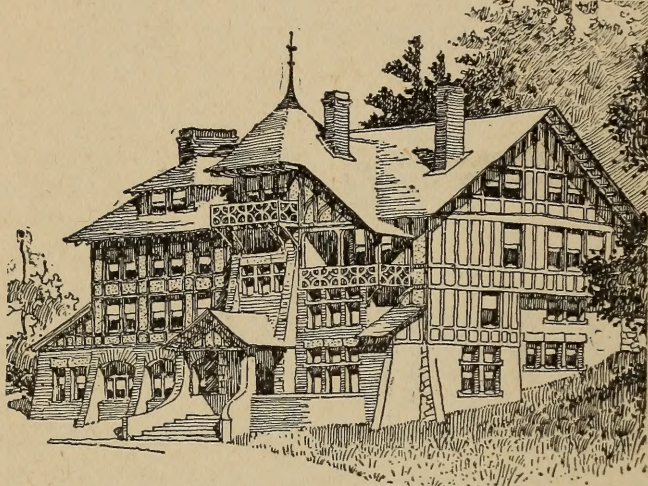

WISCONSIN DAIRY SCHOOL, Madison.

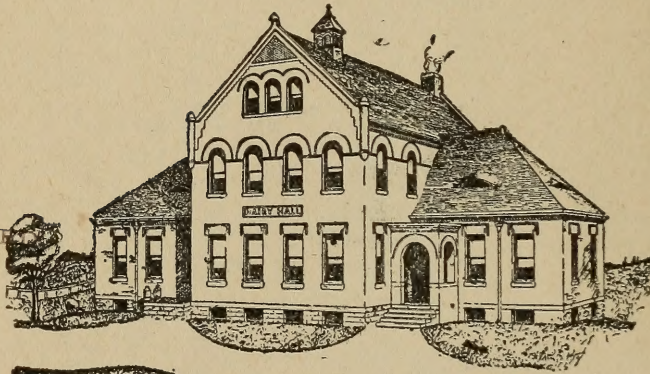

MINNESOTA DAIRY SCHOOL, St. Anthony Park.

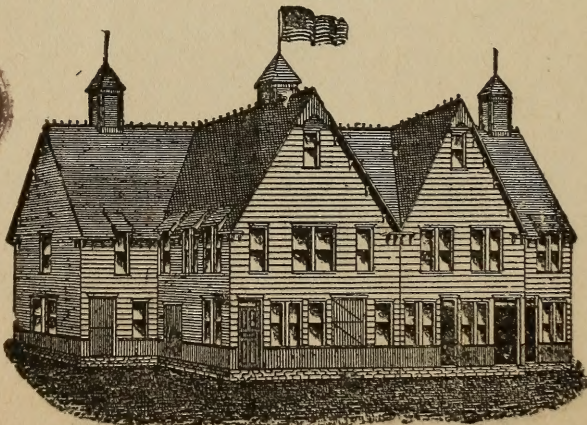

IOWA COLLEGE CREAMERY AND DAIRY SCHOOL, Ames.

TWO COPIES RECEIVED


LIBRARY OF CONGRESS
OFFICE OF
NOV 6 - 1899
Register of Copyrights.

SF263
.M75

71/22 Pm. 115 A
SECOND COPY,

56643

Sep. 5.99.

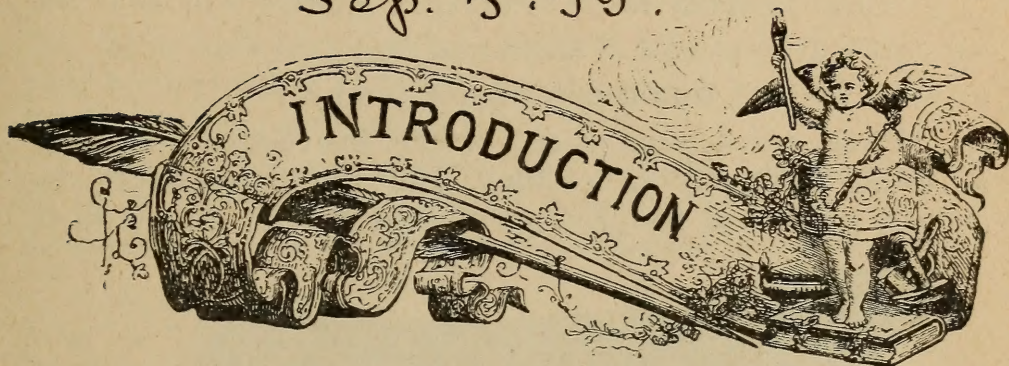

I do not pretend to fill a "long-felt want" by publishing this little book. Indeed, I realize how absurd it is for a man who denounces the so-called "general purpose" cow to the dairymen, to publish a small "general purpose" book.

Nevertheless, I hope many private dairymen as well as creamery men will find pointers in it which will make it worth their while to read it.

If I only succeed in making the reader eager for more information, I shall have accomplished one of my purposes, and the other, to make some money for myself, I trust a quick sale of this edition will realize.

J. H. MONRAD.


WINNETKA, ILL., September, 1899.

CHAPTER I.

THE MILK PRODUCTION.

WHICH COW DO YOU MILK?

“First, catch your hare” is the instruction given by a certain authority in cooking, and the buttermaker, to make a success of his profession, must first of all see to it

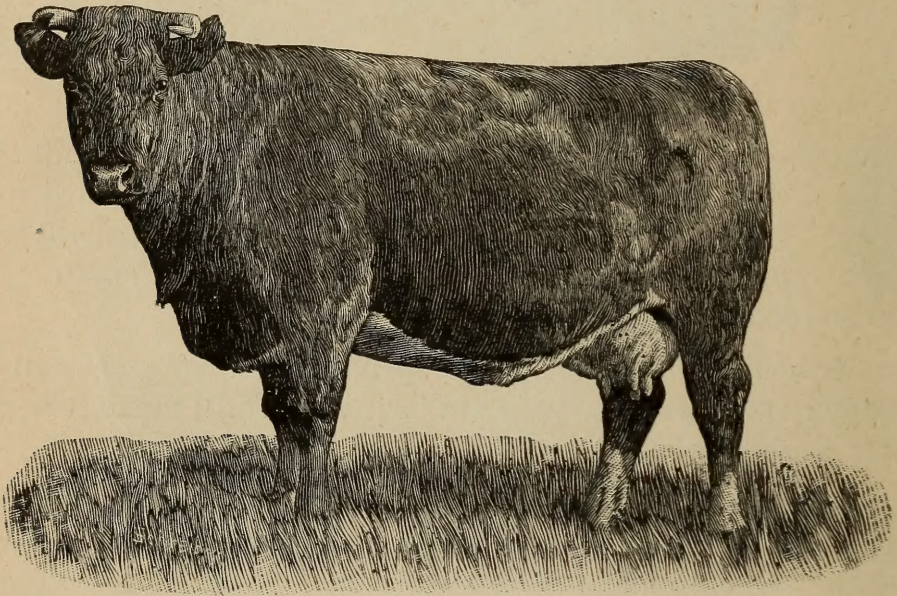

DIDO.

that his raw material—milk—is produced as cheaply as possible. This is the duty not only of the home buttermaker, but of the creamery buttermaker as well. No creamery can succeed in the long run where the patrons produce milk at a loss.


The question then is *Which cow do you milk?*

Do you milk the blocky, plump *Dido*, who, though she gave 5,562 lbs. of milk, or 216 lbs. of butter, produced the latter at a food cost of 18.2 cents per pound, or do you milk the “spare, angular cow with a deep body,” like “*Houston*,” who produced the butter at a food cost of 10.8 cents per pound?

In this question of Dairy Form (compare illustration), first raised by W. D. Hoard, lies the main secret of profitable or unprofitable milk production—buttermaking. There is no room in this little treatise to go further into details of the interesting experiments reported by Prof. T. L. Haecker, in Minnesota Experiment Station Bulletin 35. If this bulletin cannot be secured, a condensed report will be found in the "Patron's Bulletin." (See list of books advertised.)

Some tests have also been made in Denmark, in which the cost of production from 200 cows varied from 15.1 cents to 78.5 cents per pound of butter.

These experiments show that the profitable dairy cow is found not only by selecting a particular breed, but also by paying strict attention to each *individual* cow. The "aver-

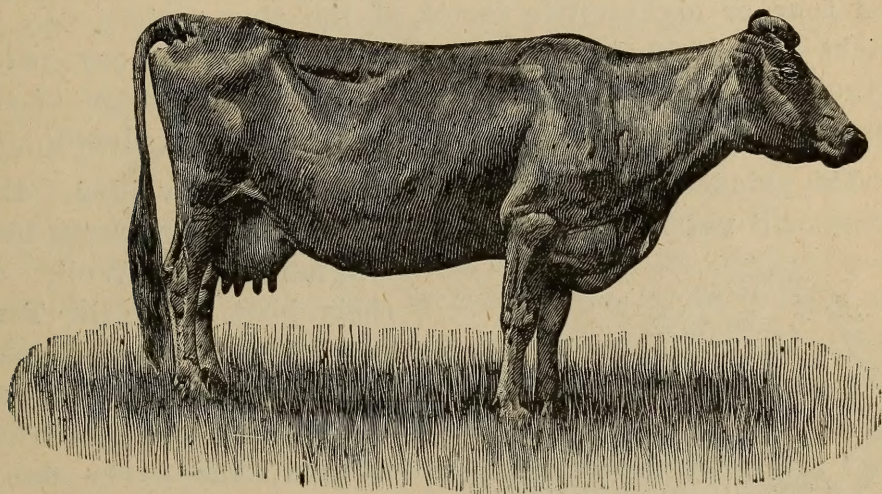

HOUSTON.

age" cow is the curse of dairying. It requires no great intelligence to see that it is better to milk six cows giving a good profit than to milk ten, four of which reduce if they do not annihilate the profit of the other six. But this is what is being done on seven or eight farms out of ten.

If it is important to test the individual cows of the dairy breeds, how much more with the so-called general purpose or dual purpose cows. In my opinion it is possible for a breeder of beef cattle to produce a fair lot of milk "on the side" at a profit, but it is folly to attempt producing steers from dairy cows. Yet some splendid milkers may be found among dual purpose cows and if they stand the test, why not use them?


TEST ASSOCIATIONS.

If the individual milk producers do not like to take the trouble to test their cows and keep an account with them, ten or twelve may co-operate and hire a young man to do it. Such a Test Association was started in 1895 in Denmark, and in 1898 that country boasted of forty such. If desired, the selection and buying of pure-bred bulls may also be made the object of such an Association.

Co-operation is the only way in which the farmers can hold up their end of the line.

It is, however, very little work to weigh the milk from each cow once a week and test it with a Babcock Tester. If there is no creamery nearby willing to do it cheaply, a good four or eight-bottle tester of the Roe pattern can be bought for \$6.50 to \$8.00. (Figure 1, shows one made by the A. H. Barber Mfg. Co., and the advertisement of the Creamery Package Mfg. Co., shows a similar one, closed).

The spindle-legged cheap tester should be avoided. But testing will not be treated here in detail, as Professors Farrington and Woll, in their book on Milk Testing, (see list of books) treat the subject in an exhaustive and practical manner, and every dairyman should buy this book as well as a tester.

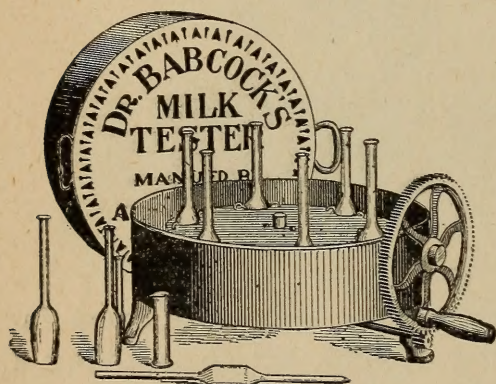

[Fig. 1.]

As to keeping track of the cost of food, there is no need of weighing it

out to each cow; but it is enough to make a memorandum now and then and note the dates when changes are made, so as to give a fair idea of what has been consumed during the year.

As a beginning let creamery men and patrons co-operate and keep track of the number of cows FED (not milked) by each patron, so as to know the average milk yield on each farm at the end of the year. The difference revealed will be an eye-opener and prove the necessity of testing each individual cow.

WHAT FEED TO USE.

It would be absurd to attempt to reply to this question, which Prof. W. A. Henry, of Madison, Wis., has treated in his 600-page book "*Feeds and Feeding*," but it cannot be dodged altogether in discussing the economical production of milk.

All food consists of various elements that are grouped mainly as protein, a muscle producing element, and carbohydrates (including fat)—heat producing elements. Various experiments have shown that the best result is obtained when these are present in the food in a certain proportion and that it is simply waste (or nearly so), when either is given in great excess, just as it would be waste to use lime as manure on a soil already rich in lime. What this proportion should be is a mooted question, and the Germans propose to vary it according to the quantity of milk given; suffice it here to mention that Prof. Woll suggests 24.5 lbs. (dry matter) with a proportion of 1 lb. protein to 6.9 lbs. of carbohydrates. This ratio is based on the actual ration given by 128 successful American dairymen,—but it seems to me that the *economical* ratio (proportion) will depend somewhat on circumstances, that is, on the local price of the various feeds. Judgment must be used to decide whether, for instance, to sell oats and corn and buy bran and oil meal or not, and cost of freight and hauling must be considered.

In our western states the carbohydrates are produced in excess and consequently the mistake of feeding too much of them is often made, as when corn is given in excess. The rations should be balanced up by adding bran, peas, linseed or cotton seed meal, the latter containing over three times as much protein as corn and only half the amount of carbohydrates.

Prof. T. L. Haecker has made up the following table of values, based on the percentage of digestible protein:

*Comparative Value per Ton or Bushel,
when Bran is Worth*

FEED STUFFS.	\$4.50	\$6	\$8	\$10	\$12	\$14
Bran.....	\$4.50	\$6.00	\$8.00	\$10.00	\$12.00	\$14.00
Barley.....	.08	.11	.15	.18	.22	.25
Corn.....	.09	.12	.16	.21	.25	.29
Corn and Cob Meal.....	.08	.11	.15	.18	.22	.25
Milton Seed.....	.10	.13	.17	.22	.26	.30
Oats.....	.05	.07	.09	.12	.14	.16
Peas.....	.20	.28	.37	.47	.56	.65
Rye.....	.11	.14	.19	.24	.28	.33
Shorts.....	3.60	4.80	6.40	8.00	9.60	11.20
Wheat.....	.12	.15	.20	.25	.30	.34
Cotton Seed Meal.....	11.52	15.36	20.48	25.60	30.72	35.84
Linseed Meal.....	9.93	13.25	17.66	22.08	26.50	30.91

*Comparative Value per Ton or Bushel
when Timothy is Worth*

	\$4.50	\$6	\$8	\$10	\$12	\$14
Timothy Hay.....	\$4.50	\$6.00	\$8.00	\$10.00	\$12.00	\$14.00
Clover Hay, Red.....	10.06	13.41	17.88	22.35	26.82	31.29
Corn Stover.....	2.65	3.53	4.70	5.88	7.04	8.23
Fodder Corn.....	3.44	4.59	6.12	7.65	9.18	10.71
Millet Hay.....	5.16	6.88	9.18	11.47	13.76	16.06
Prairie Hay, Upland....	4.63	6.17	8.23	10.29	12.35	14.41
Prairie Hay, Mixed.....	4.50	6.00	8.00	10.00	12.00	14.00
Sedge Grass.....	4.50	6.00	8.00	10.00	12.00	14.00

If 1 lb. of bran is worth 1 cent, then 1 lb. of barley is worth 0.73, corn 0.74, corn and cob meal 0.52, millet seed 0.72, oats 0.74, peas 1.55, rye 0.84, shorts 0.8, wheat 0.88, cotton seed meal 2.5, and linseed meal 2.21 cents.

He maintains that, in the west at least, the carbohydrates can be obtained at a nominal cost in straw, cornstalks, etc.

Until the younger generation of farmers is educated up to these calculations, it is a simple matter to write to your Experiment Station and state what feed stuffs you have and their selling value as well as local prices of bran, oilmeal, etc., and ask for suggestions as to proper rations. Or, if you are—as you ought to be—a subscriber to Hoard's Dairyman—you simply write to that paper.

But, and a very large BUT, we must always bear in mind that these chemical analyses of feeds are averages and may not fit your case exactly, and that the practical farmer, while taking hints from the chemist, will feed his cows with one eye on the milk pail and the other on the excrements. Give your cows a variety of sound feed, and if stabled, provide a succulent food, either roots or silage, and remember that where corn will grow *no cheaper food basis exists than well-preserved silage.*

In summer the most common mistake, which increases the cost of production, is to allow the cows to shrink in yield when pastures are getting poor, instead of supplementing them *at once* with some sort of a soiling crop. Any dairy farmer deserving the name should have a few acres planted for this purpose. If not needed it is not lost. Silage is also used for helping out pastures by such men as H. B. Gurler. Finally let me put in a word for cutting hay early and curing it as *hay* and not as *straw*, and for the making of *oat-hay*.

These general outlines being observed and the feeding and watering being done at *regular* hours, we have done what is possible to produce cheap milk as far as feeding is concerned.

I mention six daily rations which Prof. Woll recommends as good examples.

1. Corn silage 40 lbs., clover hay 8 lbs., wheat bran 6 lbs. and corn-meal 3 lbs.
2. Corn fodder 20 lbs., hay 6 lbs., oats 4 lbs., shorts 4 lbs., oil meal 2 lbs.
3. Corn silage 50 lbs., corn stover 6 lbs., oats 6 lbs., malt sprouts 4 lbs., corn-meal 2 lbs.
4. Corn silage 30 lbs., hay 15 lbs., wheat bran 3 lbs., corn-meal 3 lbs., cotton seed meal 2 lbs.
5. Timothy hay 10 lbs., clover hay 8 lbs., wheat bran 6 lbs., oats 6 lbs.
6. Corn fodder 20 lbs., clover hay 8 lbs., oats 6 lbs., oil meal 3 lbs.

INFLUENCE OF FEED ON THE RICHNESS OF MILK.

Most farmers as well as scientists labored for years under the delusion that an increase in the feed, and especially in that rich in fat, would increase the percentage of fat in the milk. Later experiments have proven that this is not true to any extent worth mentioning. Feeding to excess or feeding very rich food may for a short time increase the richness, but it soon drops into the percentage normal for each cow and the ambitious breeder who "tests" his cows that way has a fair chance of ruining them for life.

Why! starving a cow will make her give abnormally rich milk, though less of it.

Increasing the feed of a cow, not fed up to her full capacity, will increase the milk yield—the total amount of butterfat produced—but not the percentage of fat in the

milk. If this old belief were correct, we should be able to make "Holsteins" give "Jersey" milk!

We want to feed all a cow will pay for—no more, no less.


WHAT CARE DO YOU GIVE YOUR COWS?

The right cows being secured and the right feed given at regular hours, we may yet lose the advantages gained if the cows are kept shivering in the lee of a strawstack or suffocating in a dark, close stable.

If she is left to shiver in fall rains and snow, the cow will not only utilize a large amount of her feed as a fuel to keep warm, (an expensive firewood, indeed), but, as experiments in Denmark have shown, she will change the composition of the butterfat in her milk so much that the butter is liable to be mistaken for oleomargarine! I have no doubt this is the real cause of that lack of flavor every fall, for which our butter merchants blame the "frozen grass."

There is no need of providing fancy stables. We may even make fairly good ones with a clay floor and the walls and roof of straw, if we only provide ventilation and light. The latter calls for the heaviest cash outlay, but sashes are now so cheap and the value of light of so great importance to the health of the cows that there is no excuse for not having plenty of it.

As to ventilation, I give a cross section of a stable 14 feet by 36 and 8 feet high. A wooden flue or two A A is

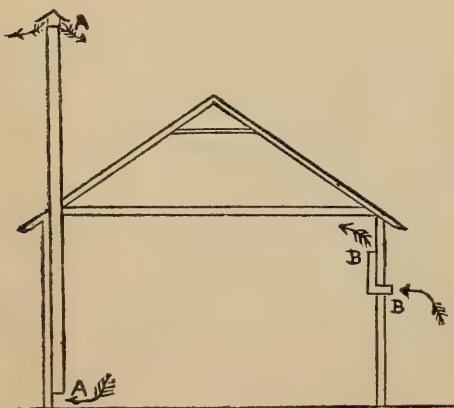

placed along one wall and made high enough to give some draft at least four feet above the ridge of the roof.

On the opposite wall are inserted two or three flues like B B, or, if the wall is a double boarded one, the air

may be taken in by leaving a board out between two studs on the outside at K (on the piece of wall shown) and another one on the inside at N, but in that case a board M should be

nailed in a slanting position with end pieces on either side so as to give the air a slant in direction of the ceiling.

As to the size of the flues, Prof. King, of Madison, Wis., considers that for 20 cows, they should have a cross-section 2 feet by 2 feet. The intake of fresh air need not be nearly so large, as there are always leaks at windows and doors and it is better to have several small intakes to prevent draught. This principle—air circulation without draught on the cows—can be applied to a straw stable as well as to the most expensive one.

Comfort is an important element in cheap milk production, and while fixed stanchion may make it easier to keep the cows clean, we need only observe them when lying in the pasture to know how cruel and unnatural their position must be in those “animal stocks.”

Tying them, or—if it can be afforded—one of the modern stalls like the “Bidwell” or the “Drown” are the only right systems and a liberal supply of bedding will not only help to keep them clean and make them comfortable, but increase the manure heap, which the Danish farmers call their “gold mine.”

To keep a cow tied up all winter is in no way a natural treatment, and though it is done by many good dairymen (thus universally in Holland and Denmark), the trend is now to do as Mr. H. B. Gurler recommends in his *“American Dairying,”* give them lukewarm water outside, and if the weather is fairly mild let them remain there an hour or two at their option. This advice should not be misunderstood as a defense for those farmers who turn their cows out to drink through a hole in the ice on the watering trough.

The more the cow is deprived of exercise, the greater the need of keeping the pores of the skin open by daily carding and brushing. Indeed, this is not only a question of health (cheap milk production), but also of cleanliness (pure milk). It is a wonder to me that the farmer who will give his time willingly to keep his horse clean, begrudges it to his cows. It is a question of health in both cases, but in the latter it is also a question of health to his own family and those who may drink the milk, not to speak of the quality of the butter. Either on the farm or in the creamery, quality means dollars and cents.

MILKING.

The manner in which the milking is done has also an influence on the cost of production. *Regular hours* are all-important and so is kindness. Indeed, I do not believe any one quite a success as a milker unless he (or she) can make the cow look upon him (or her) as an adopted child.

The importance of milking the very last drop is due not only to the fact that the last pint is many times more valuable (richer in butterfat) than the first, but also to the fact that it helps to keep up the flow of milk and extend the milking period. This is especially important in developing heifers.

Cleanliness in milking means quality in the butter. If the cows are cleaned and brushed an hour or so before milking, so as to let the dust settle, the only precaution needed is dampening the udder with a wet cloth so as to prevent scales and dust from falling into the pail. Many milkers have the bad habit to let their fingers get wet, sometimes deliberately dipping them into the milk, so as to make them slide down the teats. The proper way is to milk with perfectly dry hands, by squeezing, not by sliding. Only in "stripping" to start the flow and to get the last drops of milk, it may be preferable to slide the fingers down the teats.

It is hardly necessary to say that hands and fingernails must be clean and that all utensils must first be rinsed with cold water and then carefully washed and scrubbed—using soda, the excellent "Savogram" or "Gold Dust" (never common soap) when needed—and finally rinsed with boiling (not 190 or 200, but 212 deg. Fah.) water. The pails and cans should be easy to clean and the seams soldered perfectly smooth as any little unevenness in the surface makes them more difficult to clean.

These rules for producing clean milk are not new; over a hundred years ago they were observed by the good butter-makers, but it remained for the last decade of this century to explain the reason "why," and thus make the tedious work easy.

Souring of milk, and indeed most of the taints from which milk may suffer, have been shown by our scientists to be due to various bacteria. These bacteria thrive in the excrements and dirt, and they float on the dust and drop into the pail while milking; they abound in the little specks of dried milk left in the crevices in badly soldered cans in poorly

cleaned strainers, in rags used, or rather misused, for wiping the cans after washing (which should never be done) in dust gathered on the cow's hide, under the fingernails of the man who milks, in fact everywhere.

When we know this, we understand the necessity of the precautions hinted at, and when we know that these bacteria will multiply in the warm milk much more rapidly than in cold, we understand the value of cooling the milk as much as possible at once in order to deliver the milk in the best condition to the creamery.

Every bacterium which is in the milk as it leaves the stables will multiply 23 times in two hours at 95 deg., 215 times in four hours and 3,800 times in six hours. But if the milk is cooled to 55 deg. they will multiply only 4 times in two hours, 8 times in four hours and 435 times in six hours, *while if chilled in ice they will hardly increase at all.*


BETTER CARE NEEDED FOR MILK SENT TO THE CREAMERY.

It is not so hard to convince the private dairyman of the need of all these precautions, he will at once see their value in a better product—better price. But he should also be willing to acknowledge their need when sending the milk to be made into butter at the creamery. He is just as much interested in the final result whether the creamery be run on a strictly co-operative basis or by an individual. Indeed, as the milk has to be transported before being separated and the bacteria get a better chance to develop than if the butter is made on the farm, handling the milk for the creamery requires more care. If patrons understand this and act accordingly, it will be easy to increase the value of our creamery butter from 1 to 2 cents a pound, or, for the United States, say from three to six million dollars.


COOLING AND AERATING.

Experience has shown that the very best way of preparing milk for hauling is to run it over one of the combined aerators and coolers. The two best styles are represented by Fig. 2, the "Star Cooler," and by Fig. 3, the "Champion Cooler." The first is arranged so as to have water, or better still, iced water, flowing in the opposite direction from the milk and will cool the milk in the most economical manner. Other manufactures, such as A. H. Reid Vt. Farm Machine

Co., etc., make similar coolers. The second is preferable where water is scarce.

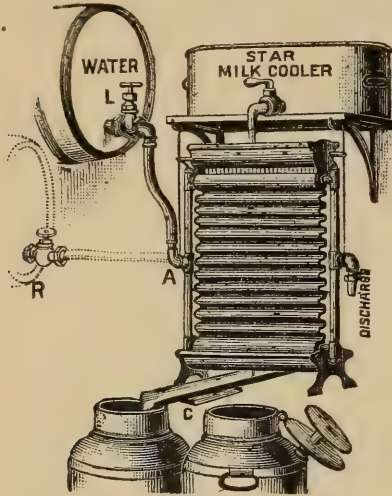


[Fig. 2.]

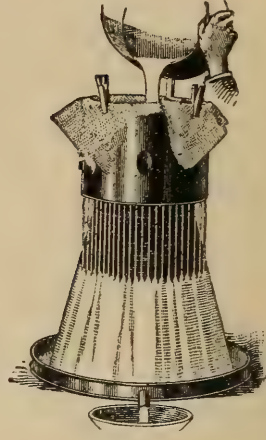

[Fig. 3.]

The compromise of aeration without cooling more than the temperature of the air will allow, will be far better than straining directly into the shipping can, and for this purpose the simple apparatus shown in Fig. 4 is satisfactory. It consists simply of a pail with perforated bottom into which the milk is strained and from there drops into the receiving funnel. It is made by D. H. Burrell & Co., Little Falls, N. Y.

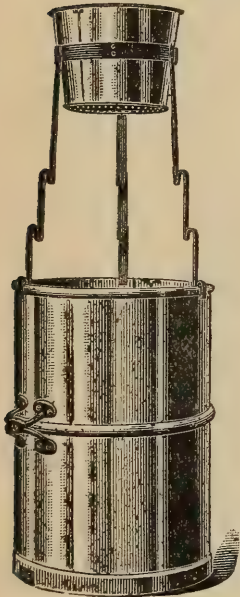

[Fig. 4]

Setting the can in cold water and aerating by dipping is, *if conscientiously done* a great help, but the way it is usually done it is a delusion and a snare.

A NEW MILK CAN.

Attention has been drawn to the importance, in buying cans and pails, of seeing that the soldering is smooth and even, but even if it is, the seams remain the danger point. In Fig. 4½, I illustrate the very latest Danish improvement. The cans are made of two pieces, pressed out of the very best English steel plate, joined in the middle of the side and heavily tin-



[Fig. 4½.]

ned. The cover is of one piece and the handles only are riveted. Dairy Councillor Boeggild strongly recommends this can in "*Maelkeritidende*," though time has not allowed its durability to be tested. The price for the 8-gallon size is \$3.00 in Denmark, but if it is durable it would be cheap at \$5.00.

STRAINING.

The strainers on the market are innumerable, but most of them are delusions and snares. "Prevention is far better than cure." In the first place all the fine metal strainers only keep the coarse dirt and chaff out, moreover nearly all of them allow the milk to rinse the spores and bacteria off the dirt as it lies caught in the meshes. Fine muslin is better, and light flannel is the best, as long as it is kept clean, and renewed when felted, so as to delay the work too much. I am not in favor of the so-called sanitary milk pail, with a small opening in the top to admit a strainer, in which the milking is done, the difficulty in keeping it clean counterbalances, in my opinion, the advantage.

Far better will it be to cover the pail with a piece of light flannel or double muslin, allowing it to sag in the middle; four cloth pins will keep it in place. For straining into the shipping can or separator tank, I also prefer these strainers that are easy to clean, having no nooks and corners. The only strainer, it seems to me, on the right principle, is that made by John Boyd, where the milk is poured through a funnel and is forced up through the cloth into the strainer can, but even this has the drawback of being difficult to clean.


KEEPING ACCOUNT.

I simply suggest the following ruling for the record of the individual cows. It requires two pages with 26 lines for each cow. In the column "For Week" you insert the "Total" milk yield multiplied by seven, and in that of "Pounds Butter Fat" the result multiplied by the percentage of fat and divided by 100. To calculate butter yield add one-sixth to the butter fat.

Weekly Record of Cow No..... Born..... The calf dropped
 Served..... Due.....

Date of Test.	MILK IN POUNDS.				Babcock Test.	Pounds Butter Fat.	Remarks.
	Morn- ing.	Even- ing.	Total.	For week.			

In testing cows they should be milked at exactly the same hour in the evening on the test day as on the day before. The total milk should be weighed or measured daily in order to control the production, and so should that used in the house or for the calves. The last pointer I desire to give in this chapter is to suggest either the offering of premiums, as Mr. Gurler does, to those milkers (be they hired men or your own boys and girls) whose cows keep up the milk flow best, or making them co-partners by giving them a certain share in whatever the cows yield during the year over a certain amount. If you do this and let the milking be counted as *work* and not as a little extra "*chore*" to be done after dark (sooner or later, as the field work may allow), you will find the cows will respond and *the cost of production will be reduced.*

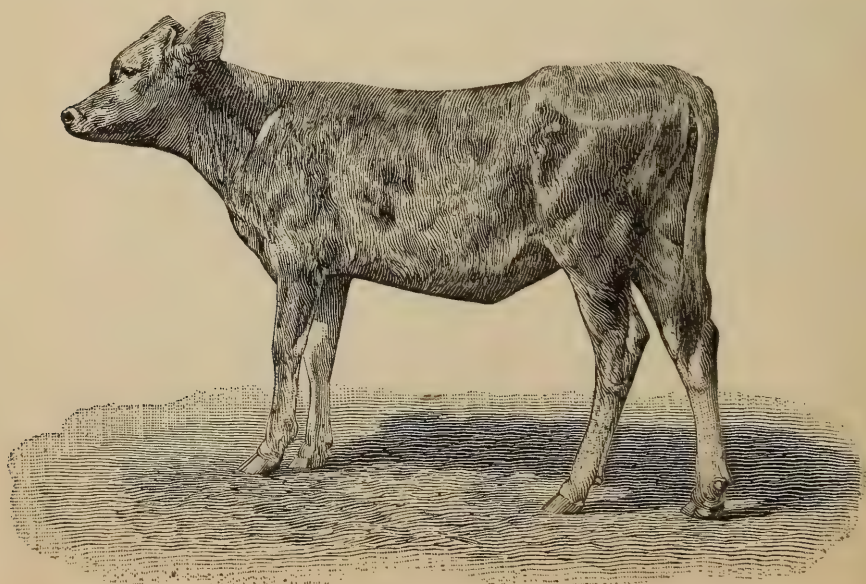

Prof. Haecker's Ideal Calf, "Young Houston."

CHAPTER II.

RECEIVING MILK AT THE CREAMERY.

THE GREATEST TRIAL.

The greatest trials of a creamery buttermaker are at the weighcan. It is there he must show his experience of human nature, his diplomacy and his sense of justice. We will presume that the proprietors (individual or co-operative) have given him the strong moral backing of a well-built, neatly painted creamery with neat surroundings, as well as full authority to reject poor milk. We will also presume that he has recognized the same principle by keeping the platform, the scales, the wall and his person perfectly neat and clean. (This presupposes also that he is not expected to be on a jump between the boiler and the receiving can).

All this given, he has yet to show his diplomacy by treating the various patrons in a way to suit their individual idiosyncrasies, so as to obtain the desired result—pure, clean milk. He has yet to show his backbone and sense of justice by refusing to accept tainted milk, which he knows will deteriorate the quality of butter, even if it belongs to the owner or one of the directors. He has yet to learn that the patron's interests are identical with his own. Every patron delivering milk should back up such a milk receiver, he is fighting in their interest, as they would lose by the acceptance of the tainted milk.

TESTING MILK.

To run a creamery on the pooling system is so absurd that it requires no mention. I am in reality in favor of having an outsider—best, a woman, receive, and take the samples and test the milk, but in any case the testing should be done openly and fairly to all and no one should do this work who has not carefully studied Professors Farrington and Woll's book on "Milk Testing." Suffice it here to say

that the better the milk has been cared for, the easier it is to secure a uniform fair sample. No maker can afford to juggle with the test or the scale either to favor certain patrons or to make a showing of paying more for butterfat than does a neighboring creamery by reading the test low or giving short weight. In the first case he steals from some patrons in favor of others, in the second case, he is simply helping his employe or his patrons to fool themselves and others.

GETTING A FAIR SAMPLE.

In testing it must be remembered that the taking of a correct sample is the most important part of the work and that when milk is left at rest only for a few minutes, the cream will commence to rise and it will make a difference whether the sample is taken from the top, the bottom or the center.

With small lots, as for instance when sampling single cow's milk, it is easy enough to get a fair sample by pouring the milk from one bucket to another a few times, but this must not be done so violently as to make it foam too much. If close work is desired for composite samples (the collecting of two or more samples for testing at once) the "Scovell" tube is safest to use. By this, if the sample is taken from a cylindrical vessel, a proportionate amount is secured each time. Thus, if a cow should give 30 lbs. of 3 per cent milk in one milking and 15 lbs. of 5 per cent milk in the next (to quote an exaggerated example) the result would be exactly correct; whereas, if we took equal samples, the result would be too high.

But the difficulty in getting a good sample is greatly increased when we come to large quantities of milk as delivered at the creameries. It is true that, if the milk is delivered every day, and has been stirred while cooling, the pouring into the weigh can and a few vigorous strokes with a long-handled dipper will enable us to get a fair sample. Yet patrons don't seem to realize the advantage of taking good care of the milk and the result is that cream clots will float on top. In taking the sample these must be avoided, the result is a lower test.

The Scovell tube is $\frac{1}{2}$ to 1 inch in diameter, with three openings and has a cap at the bottom. The tube is pushed gently to the bottom of the can and pressed so as to push

the cap above the openings and thus a column of milk exactly like that in the can is secured.

For creamery work the objection is that too large a sample is secured and also that in doing the work—as must be—in a hurry, milk is apt to adhere to the outside and if there is any cream on top this will naturally hang on and part of it get mixed with the sample. Of course this can be avoided by holding a cloth round the tube in one hand while pulling it out with the other.

An improved or modified sampler is patented by Messrs. Kolarik & Werder, and will soon be out on the market. This consists of a tube connected with a small faucet at the bottom of the weigh can, and provided with a series of narrow openings, forming virtually a slit on one side. A rod with a handle fits tight into this tube and has a groove not larger than will hold a suitable sample. The rod is set so that the groove corresponds to the slit in the tube and the milk fills the groove. A twist of the rod shuts the slit in the tube and allows the milk in the groove to run out of the faucet. If this sampler is made so as to be easily removed and cleaned, it seems to deserve investigation by creamerymen.

Another system has been used, namely to have a very fine hole or drip-cock in the conductor from the weigh can to the receiving vat to catch the drip. Experiments at Wisconsin Dairy School have shown this method to be very exact.

THE FERMENTATION TEST.

The test for fat is, however, a simple question of a little care and absolute honesty while the test for taint is far more difficult.

When milk arrives at a temperature between 70 and 90 degrees and the receiver's nose is in good working order, it is comparatively easy to discover taint, but when the milk arrives ice cold it has to be badly tainted to be detected at once.


The receiver should take the cover off the cans personally so as to get the very first whiff. He should first see that the outside of the can is clean and when pouring the milk into the weigh can he should watch the bottom and the seams of the can. The patron should not get huffy, but rather be pleased when he sees such a close examination.

The truth is that the patron—if he does his duty—is more

likely to know when the milk is bad and should draw the receiver's attention to it.

Even with the greatest care, tainted milk will be taken in and the only way to locate the trouble is to use the *Fermentation Test*. When it is located visit the farm and if the combined efforts of farmer and buttermaker cannot discover the cause, then the same test should be applied to each cow.

The test is simply to sterilize by boiling, some glass tubes 5x1 inch (or else the "common sense" half pint bottles) and take a sample of milk in each. Keep these covered at a temperature from 90 to 110 degrees, by keeping in warm water. After five or six hours observe them, without shaking, every hour or so, note the time of coagulation and after 12 to 24 hours see how the curd acts. If it remains one solid column like pure marble and on being shaken up has a pleasant, clean acid smell and taste, the milk is first-class. If, on the other hand, the curd has a large number more or less irregular holes, it will, as a rule, when shaken, have a stench which will convince the most skeptical patron. In Fig. 5 I illustrate the original "Gerber" test, in which a lamp heats the water bath.

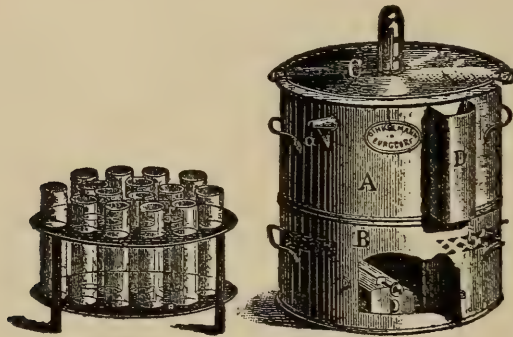

[Fig. 5.]

This test will also help the private dairyman in trouble and indeed it is the duty of every farmer who receives a complaint from the creamery to attempt to find the cause, and in the last instance make this test.

I should not be afraid of guaranteeing my butter at a creamery if the farmers kept a sample of their milk under this test and only sent me such as their wives were willing to drink at the end of the test.

As to acidity, I am not so afraid of that, as long as the separator does not get clogged, and, unless I wanted to pas-

teurize it, the nose and tongue is guide enough without the aid of the *Acid Test*.

At the weigh can is the weak point of co-operative dairying, be the factory run by an individual or by the farmers, and not until patrons have the moral conviction *that to deliver tainted milk at a creamery is not only to steal from the creamery-man, but also from their fellow patrons*, not until then, I say, have we any hope of a perfect product from our creameries.

Cans in transit should be protected against sun and dust, and in very hot weather it will be found a good thing to cover them with a wet blanket, as the evaporation of the water will cool the cans.

To secure the desired co-operation, it is much to be preferred that the patrons take turns in delivery instead of having regular milk haulers. If these have to be employed, as great care should be used in selecting them as by our President in selecting an ambassador. Unless the milk receiver knows the hauler to be a man of discretion, he had better not complain about the milk to him, but, if possible, call on the farmer in person, or ask him to call at the creamery.



Cork Buttermarket.

CHAPTER III.

RAISING THE CREAM.

COMPOSITION OF MILK—CONDITIONS AFFECTING ITS CREAMING.

In 100 lbs. of milk is found an average of 85.5 lbs. water, in which is dissolved 3.75 lbs. casein and albumen 4.5 lbs. of milk sugar and 0.75 lbs. of ash. In this watery solution—"serum"—3.5 lbs. of butterfat exists in emulsion.

The specific gravity of the butter globules is less than that of the serum (skim milk), that is, if a certain measure of water at 60 deg. weighs 1,000 lbs., the same measure of skim milk will weigh about 1,034 lbs. of new milk, about 1,030 lbs. of cream holding 25 per cent of fat, 1,002 lbs. of pure butterfat (at 100 deg.) about 867 lbs.

These facts explain the process of creaming, which goes on if milk is left at rest. The fat globules together with some serum rise to the top and form a layer of *cream* while the skim milk retains more or less of the fat.

Various conditions affect this separation, notably the depth of the layer of milk and the temperature. It is evident that the thinner the layer of milk the sooner will the butter globules make their way to the top.

Cooling will, as the late Prof. Arnold pointed out, affect the serum and make it shrink faster than the butterfat, and thus increase the difference in the specific gravity and cause the cream to rise sooner. But while milk is being heated the opposite result is obtained and the cream will rise more slowly.

If, on the other hand, the temperature is stationary, the higher temperature is the most favorable as the butterfat expands more (though more slowly) than does the serum.

These facts explain why the "practical" dairymen often report various results and demonstrate the necessity of varying the system of setting according to the conditions ruling.

SETTING SHALLOW.

This used to be the common system in most countries, whether in the large Scandinavian and German shallow wooden tub, the French and English earthenware dishes, the large enameled cast-iron pans (Destinon), the Dutch copper basins or the modern tinned steel milk pan.


The depth at which the milk is set should vary according to the temperature in the room, and if very warm I have seen it set as shallow as $1\frac{1}{2}$ inches, but if the temperature is 60 deg., the depth may be from 2 to 3 inches. The cream should be skimmed while the milk is sweet, but I have also got good results, by doing it just before or at the very minute the milk is coagulated, and, if set in a clean room, free from odors, the resultant butter may be as fine as from any other system. Coagulation stops the rising of the cream. The cream is best removed with a flat, finely perforated skimmer, Fig. 6..




[Fig. 6.]

DEEP SETTING.

The Orange County (N. Y.) system was, I believe, the first by which the milk was set in cans about 20 inches deep and from 8 to 15 inches in diameter—round Fig. 7 or oval. They



[Fig. 7.]

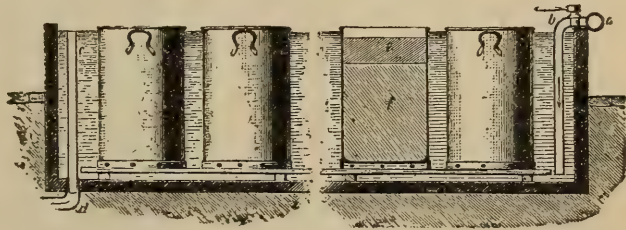

[Fig. 8.]

were placed in running water from springs holding a temperature of 48 to 50 deg. This is satisfactory, and wherever such water is obtainable the dairy should be built with a tank of wood or preferably of cement, arranged as shown in Fig. 8, letting the water enter at the bottom of one end and flow out at the top of the other.

It was soon adopted in Sweden and elsewhere, and in 1864 Mr. Swartz suggested the use of ice water; and in that case, unless tainted by spilt milk, the water need not be renewed more than once or twice a month.



[Fig. 9.]

This system soon gained ground, and its application is very simple as long as a stock of ice (or snow) is available. (See Fig. 9).

Prof. Fjord made experiments which showed that the very best results were obtained with cans 8 inches in diameter, and by using plenty of crushed ice so as to ensure a very quick cooling.

Later Dr. Babcock of Wisconsin reported

the following average analyses of skim milk from deep setting at different temperatures:


Ice water 35°—45° Fh.....	.232	Per 100 lbs. of milk set	
“ 48°287	loss by not using ice.....	.065
“ 54—56°746	“ “ “514
“ 58°949	“ “ “717

And also how an average loss of .086 per 100 lbs. of milk may be caused by not setting the milk immediately after milking.


Meanwhile Mr. Cooley invented his cans (Fig. 10). The cover, like an inverted tin pan, allows the can to be fully submerged in the water while it lets the condensed vapor escape into the latter. The advantage of this system is the exclusion of tainted air. The creamer (Fig. 11), or if that is too expensive, a barrel containing such a can may be set in anywhere, if no special dairy room is provided. These cans are sold with and without a tube by which the skim milk is removed from the cream.

The advantage of the tube to the one-cow dairy is obvious, as the good wife may at any time withdraw a little milk without materially disturbing the creaming process. More exact separation of the cream is also possible than with the regular conical skimmer used for all deep setting cans. Yet, if there should be any “sediment” it would be better to skim from the top. Experiments have shown that these cans are no better

than the common shot-gun cans *as far as the cream raising is concerned*, temperatures being the same.

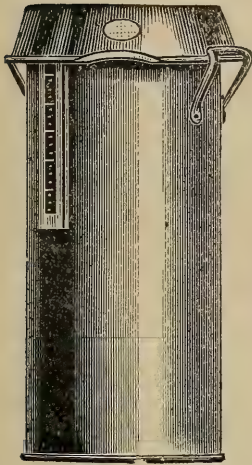


[Fig. 10.]

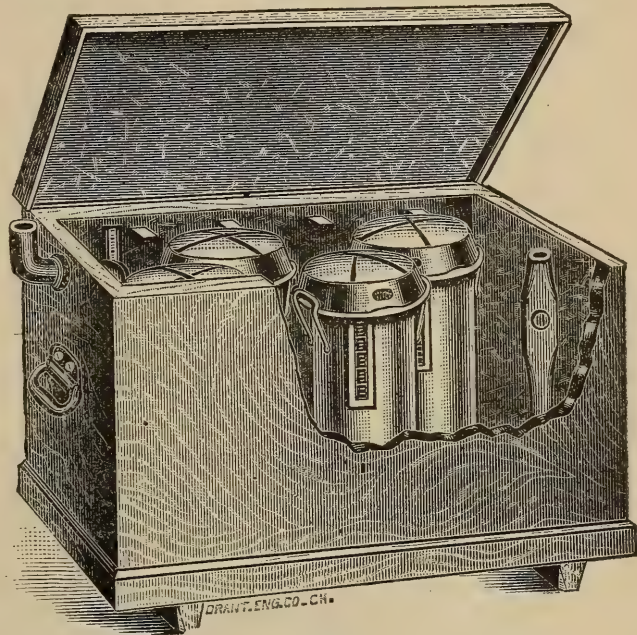

[Fig. 11.]

A good many other fancy cabinet creamers are on the market in which the ice water cools the cans in the upper compartment and refrigerates the lower one, where cream and butter may be stored. Moseley & Pritchard's (Fig. 12), and the "Crystal" in the West, "Stoddard's" and "A. H. Reid's" in the East, are among these.

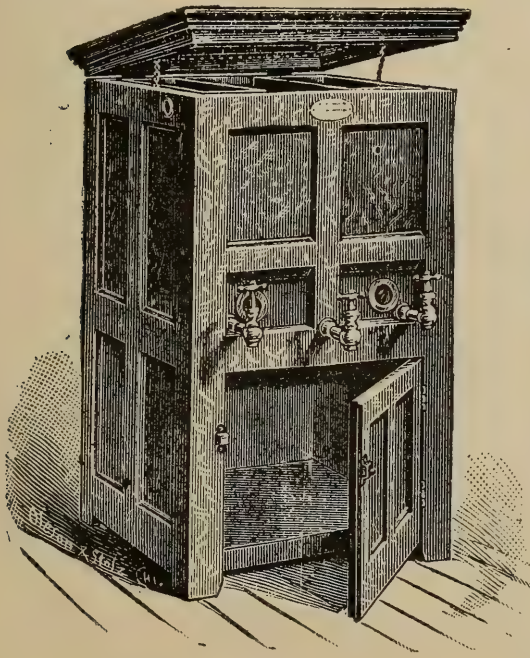

[Fig. 12.]

It is simply a matter of first cost, neatness, convenience and insulation. Provided the temperature maintained is the same, as good skimming can be done in the 60 or 75 cents shot-gun can, placed in a sawed-off' whiskey barrel

as in the finest cabinet creamer in the market.

While thus ice water or running water not warmer than 50 deg., makes this system a success, it must not be forgotten

that where warmer water than this is used, the result may be a loss of from $1\frac{1}{2}$ to $2\frac{1}{2}$ lbs. of butter (or nearly half) per 100 lbs. of milk.

Another drawback never emphasized enough in America is the fact demonstrated by Prof. Fjord that where all the milk is from cows in their last period of lactation (say from 7 to 10 months after calving), all the chilling in the world would not raise all the cream, and in that case the shallow system seems to be better. By heating the milk to about 100 deg. just before setting (done in many cases by adding hot water), this trouble is partly avoided.

SET ACCORDING TO CONDITIONS.

By keeping the conditions mentioned for these two systems in mind, we are led to modify them as the French dairymen do when they set their milk 10 to 12 inches deep in crocks, placed in running water of about 55 to 60 deg. Thus, in the south, where ice is scarce and a running spring of that temperature, or even 65 or 70 deg. is available, the shallow tin pans should be placed in a trough through which the water is led, the depth of the milk depending on the temperature. It must be remembered with both the shallow and deep-setting system that the best result is obtained by "setting" the milk as quickly as possible after milking. Delay, hauling or shaking in any way will prevent creaming. Nor will cold air do the same work as water of the same temperature; and stone crocks or glass jars will not conduct the cold (or heat) as quickly as tinned steel or copper.

THE DEVONSHIRE SYSTEM.

As another distinct system, must be mentioned that of Devonshire, where the milk is set in pans from 4 to 6 inches deep for 12 hours. The pans are then placed on the stove (or better still, provided with a double bottom (for hot water) and the temperature raised to 190 deg. or not quite boiling, after which the pans are set in the air for another 12 hours. The result is a thick, heavy cream that may be removed in blocks—the so-called Devonshire cream.

PRINCIPLE OF CREAMING BY CENTRIFUGAL FORCE.

Mr. J. D. Frederiksen, in "The Dairy Messenger," explains the principles of the process in such a clear, condensed man-

ner, that I quote: "Tie a stone to the end of a string, take hold of the other end of the string and swing it around at a rapid rate. As the speed increases, the force with which the stone will pull the string increases at a much greater rate than the speed, and the weight of the stone seems to increase a hundred fold. This is due to the centrifugal force, so-called, the tendency of the stone to fly away from the center of revolution.

When a particle of matter is swinging round a central point, the force by which it presses outward from the center of revolution depends upon the gravity, the speed and the distance from the center. Supposing a weight of one pound, w , to revolve around an axis, the distance from the center (the radius) being r feet, and the number of revolutions s hundred a minute, then the centrifugal force $f = 3.4 \times R \times W \times S^2$. Consequently, if r is one foot, the centrifugal force will be:

For	100	revolutions	a	minute,	3.4×1	3.4	pounds.
"	200	"	"	"	3.4×4	13.6	"
"	400	"	"	"	3.4×16	54.4	"
"	1000	"	"	"	3.4×100	340	"
"	5000	"	"	"	3.4×2500	8500	"

In other words, for 1,000 revolutions a minute, the distance from the center (r) being 1 foot, the centrifugal force is 340 times the weight of the matter; r being 2 feet, it is 680 times; r being 3 feet, it is 1,020 times the weight, etc. Supposing the weight of a particle of fat in the milk to be 10 weight-units, and that of an equally large particle of milk serum to be 11 weight-units, then the force by which the fat is naturally driven towards the surface by gravity only will be $11 - 10 = 1$, while in the centrifugal machine making 1,000 revolutions a minute, with an average radius of 1 ft., the force will be $340 \times 11 - 340 \times 10 = 340$. Thus the tendency of separation is increased 340 times by the centrifugal forces, and if the speed is 5,000 revolutions per minute, the increase will be 8,500 times. This gives an idea of the efficacy of centrifugal creaming as compared with any gravity process, and also suggests the enormous strain to which the drum of a separator is subjected. Supposing a stick to make a thousand revolutions a minute around its center in the horizontal plane, at each end carrying a pail with milk weighing 60 pounds, and supposing the average radius to be 2 ft., then the force with which each pail will pull the stick is $340 \times 2 \times 60 = 40,800$ lbs. or about 20 tons.


CONDENSED HISTORY OF CREAM SEPARATOR.

Prof. Fuchs, of Karlsruhe, in 1859 suggested the testing of

milk by swinging it in test tubes. In 1864 Mr. A. Prandtl, of Munich, experimented with hanging cylindrical buckets with milk on a revolving spindle. In 1870, Rev. H. T. Bond, of Massachusetts, had two glass jars fixed on a spindle, revolving only 200 times per minute. In 1873 Mr. Jensen, of Denmark, had two pails revolving 400 times a minute. In 1872 Prof Moser showed a model in Wien, and in 1874, Lefeldt, of Braunschweig, showed the first large separator. It consisted of a drum provided with a partial cover and four vertical partitions. It was encased in a heavy mantle.

The drum revolving 800 times a minute would keep the milk (220 lbs.) in a vertical position. It took 5 or 10 minutes to get up full speed, 20 to 30 minutes to separate and 25 to 30 minutes to come to a standstill again. When the milk had resumed its horizontal position, the cream floated in a heavy layer on top. The milk was removed with a siphon and the cream drawn through a valve in the bottom of the drum, which was refilled and the operation repeated. In 1878 the writer learnt to operate this at the Kiel City creamery, with the view of using it where ice could not be obtained and found the efficiency in skimming depended on the temperature, the speed and the time run.

It did not take long to improve on this crude process and the first move was to arrange for crowding out the cream when separated (as shown in Fig. 13), to the right;

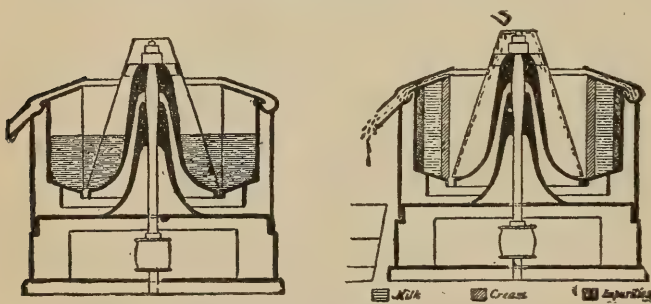

[Fig. 13.]

the drum is shown at rest. This allowed the stopping of the drum by a brake, and thus shortened the operation. But, Mr. Lefeldt continued


until in 1883 he had a machine receiving the milk and discharging the skim milk and cream continuously.

Meanwhile other inventors did not remain idle, and as early as 1878 and 1879, the "Danish Weston" (so-called here) in Denmark and the DeLaval separators in Sweden were put on the market. The first had a plate just below the cover, with openings near the wall, and this forced the skim milk into the upper space, where a tube caught and dis-


charged it, while another tube caught the cream below the plate. Fig. 14a. This machine was run at from 2500 for the large one to 4500 revolutions per minute for the small size power machine.

It had the great advantage of being able to elevate the cream, if so desired, 7 to 8 feet.

The De Laval Separator on the other hand, had a smaller drum with a neck, Fig. 14, and there the skim milk was conducted through a tube (b) and thrown on a plate cover (B), while the cream rose along the neck and was thrown through an opening (e) on the plate (C). A small screw (f) regulated the amount of cream to be taken. The speed of this separator was 7000 revolutions per minute, but operators often run it up to 9000 and above.




[Fig. 14a.]

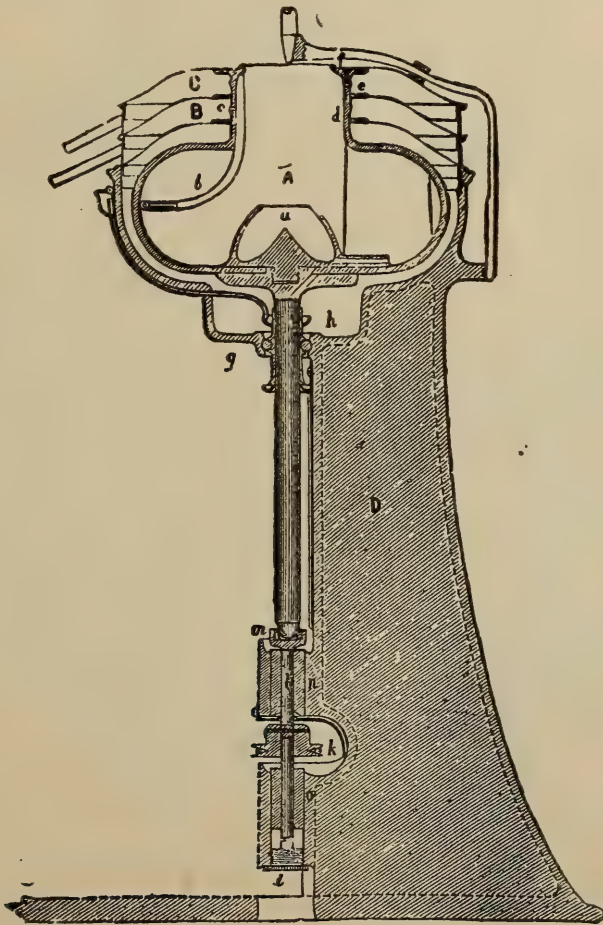

[Fig. 14.]

The DeLaval Hollow Bowl Separator.


Among the numerous other machines that have been constructed, I mention a Danish one called the "Alexandra," in England, the "Ballance" in Germany and France and "Jumbo" in America. The bowl rests loose on the spindle and thus balances itself. Fig. 15 represents the new German model.

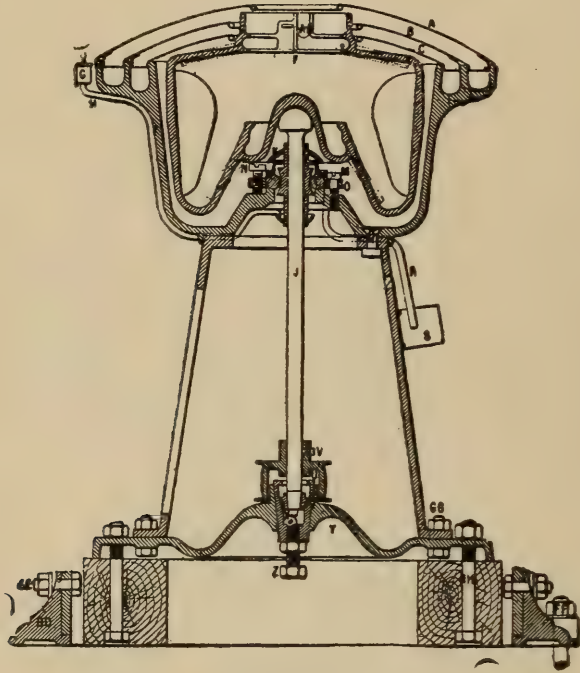

[Fig. 15.]

In England the *Victoria* discharges the skim milk at the bottom of the bowl.

In America *Sharpless* first copied the DeLaval, and later constructed the "Russian" (Fig. 16) in which the bowl is provided with a steam turbine attachment, and is rotated by steam directly. Lately he has introduced his "Tubular" in which the bowl nearly 2 feet long and only four inches in diameter, re-

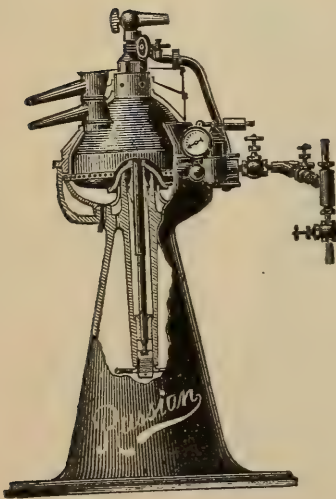


[Fig. 16.]

volves about 22,000 times a minute, and great claims are made for it, but I have heard of no reliable official tests.

The original Danish Weston have been modified and greatly improved by Messrs. A. H. Reid, Springer and A. H. Barber & Co.

In 1891, the De Laval Company adopted an improvement which consists of a series of discs (Fig. 17) which divide the

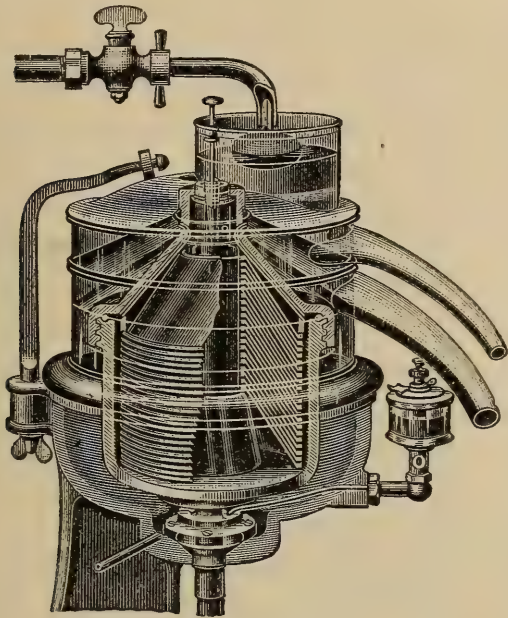


[Fig. 17.]

milk into thin layers and this increases the efficiency of the machine, so as to place it at the head of all in amount of milk skimmed per horse power used and in close skimming. It was introduced under the name of "Alpha," and nearly drove the "Danish Weston" out of Denmark. Indeed, there are no dairy centers of any note where the majority of creameries do not use it.

It is true the price is somewhat higher and cleaning may take a little longer, but the fact remains that with the same power no machine of the hollow bowl construction has—as yet—done as good work.


I illustrate the "Alpha Baby" N2, Fig. 18, but it is made in all sizes, from the aristocratic suburban 1 cow size, the "Humming Bird" capacity 175 lbs. per hour, price, \$65.00, up to the Power Alpha N2, capacity 4,000 lbs., price, \$800. In private dairies with 10 cows, "Baby N2" capacity, 350, lbs., price, \$125, seems to be the most popular one, and in creameries the Belt Power Alpha N1, capacity, 2,500 lbs., price, \$500, takes the lead. Some of the sizes are steam turbines requiring no engine.

Lately another improvement has been added, a new devise for distributing the milk, which increases the

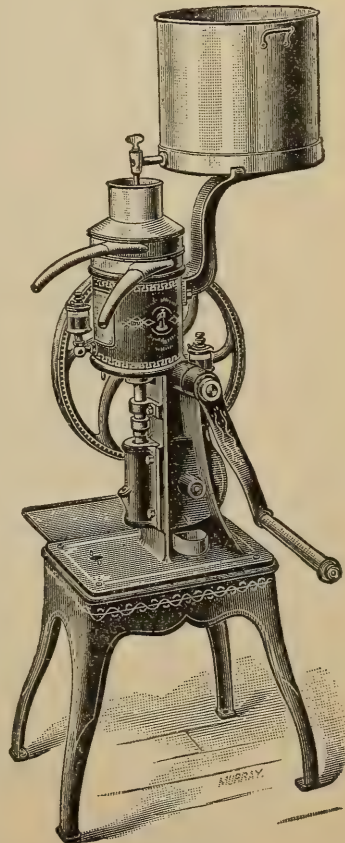

[Fig. 18.]

capacity, and a new top bearing with springs instead of a rubber ring.

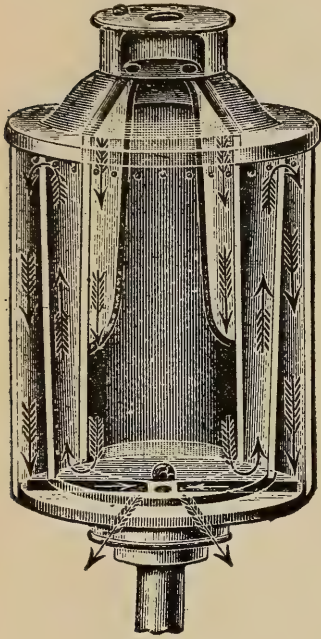


[Fig. 19.]

D. H. Burrell & Co., in their "Empire" and "Mikado" made a very deep bowl, shown in Fig. 20, Mr. Lefeldt filled his bowl with some curious celluloid tubes; the "National" uses cylindrical partitions, indented like a pineapple, and the "Eclipse" is the latest advertised. The "American" retains the hollow bowl system. Some of these, to all appearances, infringe on the Alpha Patent, and are doing about as good work. It is impossible for me to decide the patent question, and I can only advise buyers of separators to be careful and

The discarding of the old ideas that the capacity of a separator depended exclusively on the temperature, speed, diameter and depth of the bowl, set many inventors to work experimenting to find a substitute for the Alpha Discs.

Thus, in 1893, the "U. S." Separator increased the capacity of its bowl by dividing it into compartments, with two inner bowls which cause a sort of triple current. (See Fig. 19.) About the same time Mr. Melotte, of France, suggested the insertion of a number of polygonal vertical partitions in the bowl.

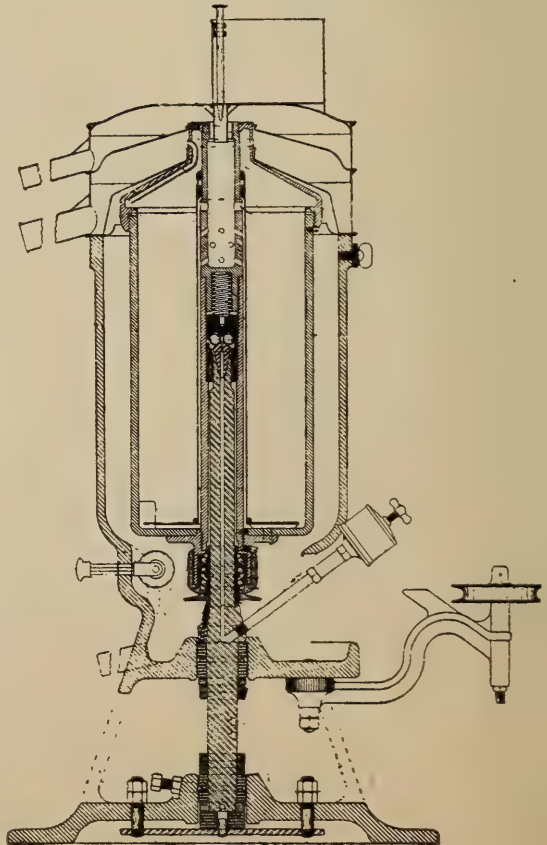

[Fig. 20.]

protect themselves by buying from reliable firms that are ready to protect them.

CHOOSING A SEPARATOR.

As to the choice of separators, no absolute rules can be laid down. All of them skim so as to leave not more than 0.2, possibly 0.3 per cent of fat in the skim milk, but the extra loss of 0.1 to 0.2 per cent means the loss of from 1 to 2 lbs. of butter for every thousand pounds of milk. If the amount skimmed is so small that the difference in the interest on the original cost is enough to equal the loss of fat, then there would be nothing gained in paying a high price for a close skimming machine. But in creameries where the difference between the close-skimming of the separators on the market may make a difference of from 500 to 3,000 lbs. of butterfat, or, say, from \$75 up to \$600 a year, in that case it is cheaper to buy the very best, even if the old ones must be thrown away.

But there are also other considerations, the durability of the machine, cost of repairs, ease of cleaning and power required. Nor is a test of the skim milk enough. If the construction is such as to retain part of the cream in the bowl in a more or less unavailable shape, this loss should be calculated. Again, if all the skim milk is to be used for cheese or for *human* consumption, the fat left in it will have its full value and it matters less whether the separator leaves 0.05 or 0.25 per cent of fat in it. If the milk is pasteurized (heated to 160 deg.) and run hot through the machine, the difference between the hollow bowl machines and the others will be reduced to a minimum as far as close skimming is concerned.

Whenever agents of rival machines are making comparative tests, care should be taken to see that the milk has the same temperature that the speed and the amount of milk run in a certain time is exactly as claimed, and that no juggling is done with the test. The double-neck Ohlson or the Wagner test bottle should be used, *not* the common Babcock. If you have a mechanical expert you can rely on, get his opinion as to durability of the competing machines.

COMPARING THE VARIOUS CREAMING SYSTEMS.

There is not a centrifugal separator on the market that is not far ahead of either shallow or deep-setting, even though

these, under favorable conditions, for a short time each season, may leave as little fat in the skim milk as do the poorest separators; the "average" will at best be about 0.5 per cent and under unfavorable conditions go as high as 1 per cent. Experiments made by Prof. Fjord showed that even the original self-skimming Lefeldt machine gave more butter as follows:

PER CENT OF BUTTER OBTAINED BY THE CENTRIFUGE OVER THAT
YIELDED BY

Ice System—May, 8.3; June, 7.3; July, 4.5; August, 3.1; September, 3.7; October, 18.1; November, 28.0; December, 17.8; January, 7.6; February, 3.8; March, 3.7; April, 4.1.

Shallow Tubs—May, 10.4; June, 9.6; July, 13.8; August, 11.0; September, 16.0; October, 14.9; November, 15.6; December, 13.1; January, 8.8; February, 5.4; March, 6.0; April, 6.4.

It is perfectly safe to calculate an increase of 10 per cent on the yearly butter yield whenever a separator is used instead of the other systems, even under favorable conditions.

With either the other systems the cream will not rise as well, if the setting is delayed or the milk shaken by transportation, but with the separator it does not matter nearly as much, nor will the period of lactation affect the separator much. We may have to reduce the flow a little—that is all.

Tests have proved that cream and milk is purified by the separation which leaves a sediment on the bowl and in this may be found not only dirt and scales, which pass through the strainers, but also a considerable proportion of germs and bacteria, notably those of tuberculosis.

Add to this the increased value of skim milk, when we are able to feed it warm as it comes from the cow, and it is evident that no private dairyman having 5 to 10 good cows can afford to be without a separator.

CREAMING SYSTEMS THAT ARE FAILURES.

It would not be necessary to mention these if it were not for the fact that several otherwise respectable agricultural papers, have recently run the advertisement of several such, and that even dairy papers are sometimes induced to give them space.

Thus we had, some years ago, the vacuum system, by which a small air pump exhausted the air from the milk can. This.

like creaming by an electric current, was, however, a short-lived delusion, and so was the famous Berrigan Separator, in which the air pump was used to create a pressure in the milk can and the milk diluted with 20 per cent of water. The Cornell and Wisconsin Universities disposed of this. The former reported the tests showing the percentage of fat in the skim milk to be:

Laval Baby N2.....	0.09
Cooley, set at 40 deg.....	0.29
Berrigan Separator.....	0.59

Not only was it a failure, but it was an attempt to deceive by using the word "Separator."

Creaming by dilution was attempted 30 years ago in Denmark and Germany, and many "practical" farmers reported good results, but that was in the ante-Babcock days.

Drs. Martin and Peters (Germany) tried it in 1869, and found that while apparently more cream was raised the cream contained less butterfat than that from undiluted milk, thus explaining the fallacious result claimed.

Every now and then during the last fifteen years our agricultural papers have passed around notices of the wonderful benefit of dilution, various experiment stations took up the experiments, and while not all in accord, the results were not favorable to the process. Indeed the only experiments favorable to dilution that I recall are those reported in Bulletin 79, Cornell, which seems to indicate that while there is no benefit from diluting with cold water, some gain was observed from diluting with 25 per cent of water at 135 deg. But, as there was a considerable difference in the temperature of the diluted and undiluted milk when "set" and the latter had the benefit of the higher temperature, those experiments are of but little value.

When we want to make an experiment comparing two methods, we must have all conditions alike, but the one to be tested; this is where so many "practical," and, I regret to say, even some of the scientific experiments fail.

Theoretically the addition of water, temperatures being kept the same, should rather delay the creaming, as it reduces the difference in the specific gravity, but if there sometimes is a benefit a possible explanation may lie in its preventing or delaying the coagulation of the fibrin discovered by Dr. Babcock.

The advertisements referred to are those of the "*Hydraulic*," the "*Aquatic*" and other "Separators" (*sic*) which all profess to be patented and consist of a large can with a faucet into which the dilution water is introduced at the bottom through a funnel or otherwise. The whole apparatus is sold for about four times its actual cost and farmers are misled by the term separator into comparing the low (?) price of \$10 to \$20, with that of \$65 for the centrifugal separator. They have no more right to the name of separator than a shot-gun can. To this class belongs also the "*Automatic*" separator, which is a tube for distributing the water at the bottom of a can. A patent on this process is not worth the paper it is written on, and can only apply to some peculiar shape of the can, which has no influence. Any one may use a common can, and if he wants to introduce the water at the bottom, have a loose funnel and pipe made at the tinner's. But, I presume, that this and other frauds will, like the "gold brick" succeed time and again among the "*practical*" farmers who won't read "*Hoard's Dairymen*," or any other paper.

CHAPTER IV.

SEPARATING.

PREPARING THE MILK FOR SEPARATION.


On the farm the milk is in its very best condition for separation immediately after milking, and the warm skim milk is then at its best for feeding purposes. Indeed, where convenient and where the separator is not too far from the stable it may be started as soon as the milkers are far enough ahead to keep it going and the milk may thus be strained directly into the separator tank, and thus save the cleaning of an extra vessel. If, by some accident, the supply of milk should not be kept up, a little water or skim milk should be run through the separator to drive out the cream. If the night's milk is not separated till morning it should be warmed to 80 or 90 deg. This is essential with all hollow bowl separators, but less so with the "Alpha," which will skim clean even at 60 deg.

At the creameries the heating of the milk is an important function and is but seldom done in a satisfactory, uniform manner. The two principal systems used are, either heating the milk in a large body in the receiving vat, or passing it through some heating apparatus on its way from there to the separator. The danger of the first lies in the keeping of the—already old—milk at a high temperature and thus souring and developing bad flavors, and of the second, in the fact that the fat does not take the heat as quickly as the "serum" and thus the true temperature desired is not obtained, and also in the fact that no automatic regulator has been invented that would keep the milk from varying considerable. I have thus even in good creameries, observed a variation of 10 deg. with heaters like Fig. 21.

THE HEATERS.

Most of the heaters used in our American creameries are similar to Fig. 21, which represents an improvement on the

so-called "Danish Western" heaters, but unless they are made large enough they are not at all satisfactory. I presume their popularity lies in the fact that it requires only a few inches drop from the receiving vat to the Separator. Similarly the "Larkin's" heater, a direct steam heater on the pipe conducting the milk from

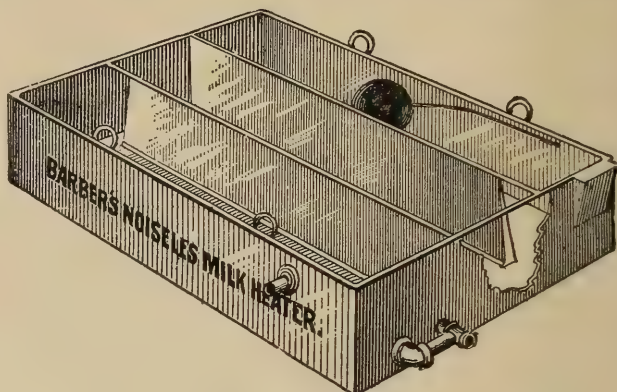


[Fig. 21.]

the vat to the separator, requires no drop at all and has been endorsed by many good makers,

I cannot say that I like the application of direct steam in any manner. There is always a certain risk of contamination even if no boiler compound makes it a certainty.

Far better to use the heaters—even if more expensive—as represented by the Fjord Heater. Fig. 22.

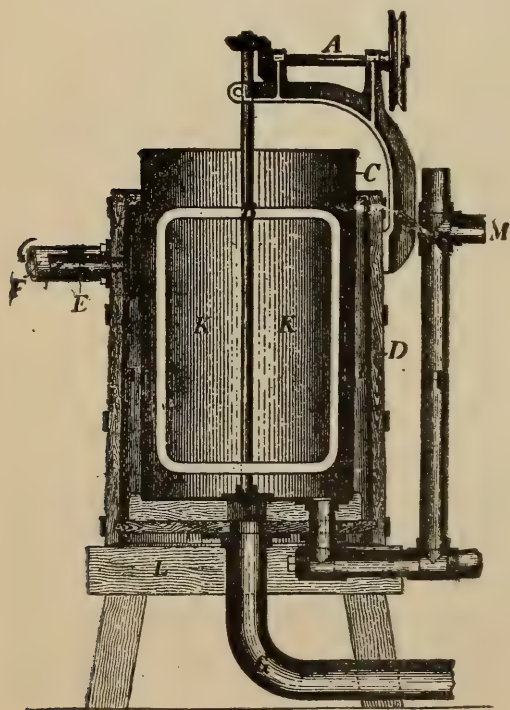

[Fig. 22.]


This consists of a strong wooden barrel D in which a tinned copper vessel C is inserted. A stirring apparatus K prevents the milk, which enters at M through H, from scorching on the side. Steam is introduced by F if exhaust, and E if direct steam is used. Condensed water escapes through G. The milk outlet (not shown in the illustration) is above the wood.

This, with modifications and improvements, has been the common heater used in Europe and

now elevates the milk to the separator, but inventors continue to work on the problem of securing a uniform heating of all the milk to the desired temperature without scorching

The DeLaval Company have a neat little turbine heater and Mr. A. H. Reid has copied the improved Danish. (Fig. 66). A new heater, the "Hill," made by the A. H. Barber Manufacturing Co.

Fig. 24 is said to give satisfaction. The milk enters through a pipe, which also serves as a spindle on which revolves a drum provided with an inside one which keeps the milk in a thin layer. A steam jet revolves the drum and heats the water surrounding it. If the temperature gets too high the milk will overflow even if the steam is shut off and the drum is at a standstill.

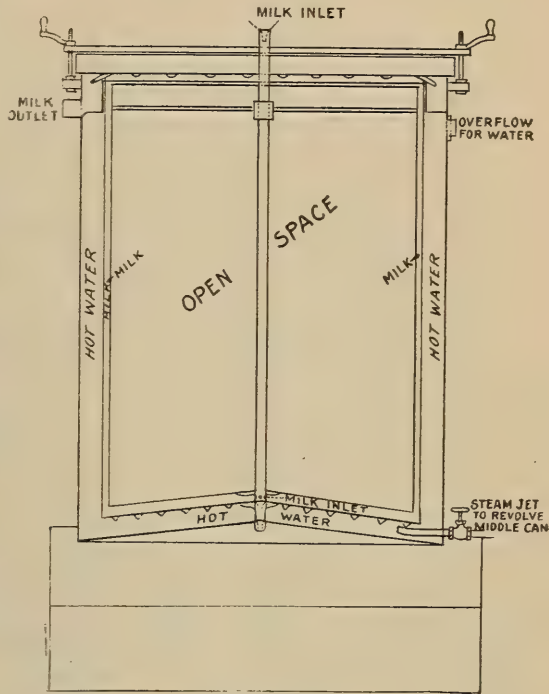

[Fig. 24.]

FILTERING MILK FOR SEPARATION.

The milk is generally strained into the receiving vat in a more or less, generally less, effective manner, through muslin, and if all the patrons sent absolutely clean milk, even this might be omitted, yet the average condition of the milk I have seen received at our creameries has led me to consider the advisability of filtering it. For this purpose the "International" Filter would be the best of those I know of, but whatever is used, strainer or filter, it will be a delusion and a snare if not kept absolutely clean.

In running the milk from the heaters to the separator it is a very bad practice to use rubber hose, and even common galvanized pipes should be condemned. Take exact measures and have copper or brass tubing, *heavily tinned*, made to fit the distance, joined with unions, and do not have any one piece longer than 4 feet, so as to make cleaning easy. The extra cost will be as nothing compared with the advantage.

CHAPTER V.

CREAM RIPENING.

If cream is churned perfectly sweet it will have a very faint aroma and an insipid taste, and the demand for such butter is very limited. For this reason, all those who have no special orders for it should ripen the cream before churning.

NO UNIFORM RULES POSSIBLE.

It is evident that if we desire to churn the cream at a certain degree of acidity (and age) our treatment of the cream must vary according to the system by which it was raised. It stands to reason that cream which has been raised for 36 hours in a shallow pan, and perhaps not skimmed until the milk was loppered, need not the same treatment as that whirled out of a separator within an hour of milking time. Then, again, that raised in ice water needs a modification in its treatment, just as cream in a separator creamery must be treated differently from that in a gathered cream creamery. A difference must also be made if we churn every day or only every other day or once a week.

BUTTER FLAVOR AND COMPOSITION OF BUTTERFAT.

As indicated, the object of ripening is to develop that peculiar aromatic flavor which is characteristic of all fine butter. But what really causes this flavor is as yet a mooted question among scientists.

Years ago when the chemists ruled the roost, the flavor in butter was credited exclusively to the so-called volatile fatty acids. Butterfat, it must be understood, consists mainly of Palmitin, Stearin and Olein, which may be found, more or less, in nearly all animal fats; butter contains, however, six other substances.

Some of the "fatty acids" are volatile, and it was maintained by chemists that the action of the casein and milk

sugar in the butter on these "fatty acids" developed various fine odors which soon turned into the disagreeable, rancid odor and taste.

Later the bacteriologists claimed that the aromatic flavor was simply due to certain microbes, and at one time the hope was held forth that the dairymen could be supplied a "pure culture" which would provide the desired flavor.

In this we were disappointed, and it proved true that the question was not quite so simple and that flavor depends on more than one breed of microbes. This is, in my opinion, a good thing for the dairymen, because if the development of flavor could be made such simple and exact science the creameries might as well leave buttermaking in the hands of the packers.

To me—as a layman—the theories of the chemists and bacteriologists seem to supplement each other and confirm my practical experience in buttermaking. It matters not to me whether the flavor is the result of the action of certain microbes or that of their chemical products on certain parts of the butterfat, but practical experience tells us that the chemists must be right in so far that the desired flavor is *developed* in the manufacture. Pure butter oil has little or no flavor, sweet cream butter but a trifle more and the more we ripen the cream (up to a certain point) the more we increase this flavor. On the other hand we also know that feed and external conditions have some influence on the flavor and that June and July butter is ahead of winter butter.

Analyses have shown (Fleischmann quoting Bussingault) that summer butter contains 40 per cent hard fats and 60 per cent soft, while winter butter contains 65 as against 35; hence, the latter is much firmer and stands up better.

Other chemists have also shown that, for instance, feeding an excess of cotton seed meal will increase the percentage of hard fats and (Palmitin and Stearin) and linseed meal will decrease them. Hence the now well-known variation in churning temperatures and firmness of the butter.

Danish experiments have shown that leaving cows out in the fields in stormy and rainy fall weather will have the result that, even if they are fed exactly the same as those comfortably stabled, the percentage of volatile fatty acids is reduced to such an extent that English chemists suspected the butter to be adulterated and practical butter experts scored it low in

flavor even if the cream had been ripened to the same degree in both cases. (Hence, the general complaint in fall of "wintry" flavor on our markets).

It seems to me that the theories of the chemists agree perfectly with the experience of the practical buttermakers.

The chemists attempted to produce a "butter flavor," but they have not been able to provide oleomargarine with the desired aromatic flavor any more than the bacteriologists. Nevertheless, the latter have—by combining more than one breed of bacteria—succeeded in producing commercial "starters" which, when made by reliable firms, give a uniform and satisfactory result, but in no way better than that obtained from good home-made "starters." Where uniformity is of importance the commercial starters are to be recommended. We have *Hansen's Lactic Ferment*, *Douglas Butter Culture* and B 41 in the market here.

The attempt to introduce these has done a great deal of educational work, showing the butter makers the great importance of the ripening process, and thus in reality reduced the variation in flavor caused by feed, climate and period of lactation, but only in one case (Iowa Experiment Station) have tests been made resulting in the assertion that the difference may be wiped out altogether by careful high ripening, that, in other words, just as fine flavored butter can be made from strippers milk as from that of fresh milking cows.

The fact remains that cream-ripening is the most important part of buttermaking, and that, as I said years ago about cheesemaking, "*Acidity—like salt and charity—covers a multitude of sins.*"

RIPENING CREAM ON THE FARM.


Let us now come down to the practical handling of cream on a small farm. A common way is to keep the cream in a stone jar, and if any attempt is made at ripening, to place it near the kitchen stove. Stone jars, if there are no cracks in the glazing, are all right, but not very convenient to handle, and especially troublesome when it is desired to change the temperature. Take it all in all, there is nothing better than a clean, heavily-tinned and smoothly soldered steel or copper can. In this the temperature of the cream may easily be changed by placing the can in a larger one or in a tub with water. The warmer the water the more important it is to

stir the cream so as not to overheat part of it. It is safest not to have the water more than 120 or 140 deg.

When the right temperature is obtained the can should be placed in a box or barrel large enough to have about six inches insulating material (hay will do) round the can so that the temperature may be kept from falling much, even if we have to keep the can in a very cold room, kitchen, damp cellars and living rooms being barred.

When it is desired to cool it, the can is simply placed in a barrel of cold water and kept there, changing the water or adding ice as needed.

This is the simplest and cheapest way which any one can desire, but if we can afford it the hay box may be replaced by one into which a can (large enough to hold the cream can) is permanently fixed keeping the insulating material in place and having an insulated cover. Or, in a larger dairy, the Boyd farm cream vat (Fig. 25) may be used. The vat is insulated with felting and the temperature is changed by swinging a tinpail (with either hot or cold water) in the cream. Or we

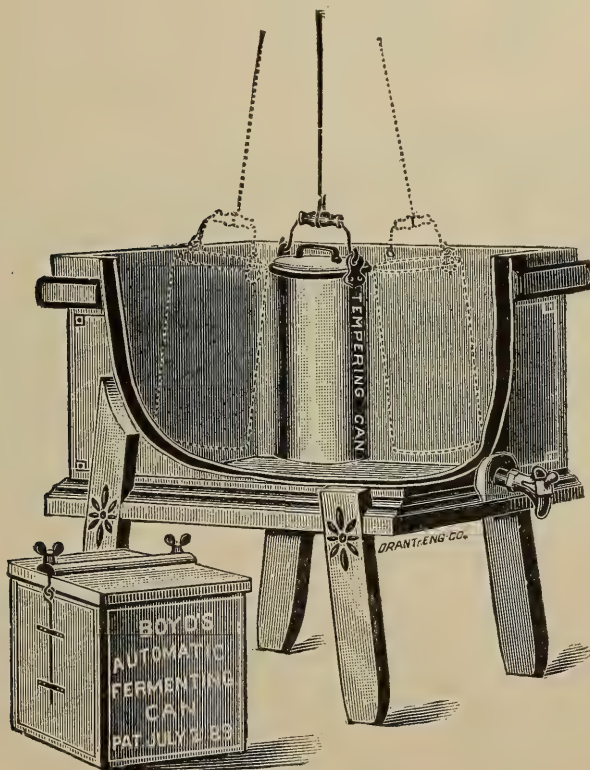

[Fig. 25.]

may have a little square or round vat made on the plan of creamery vats, all according to our means, as long as we keep

in mind the necessity of being able to change the temperature at will and maintain it without too much trouble.

If churning only twice or three times a week, the object must be to keep the cream as cool as possible, up to within 12 or 18 hours of churning time. The warm separator cream should be cooled before adding it to the previous lot in the can.

If shallow pan cream is used the cream will be nearly ripe and, as a rule, will be ready to churn 12 hours after adding the last batch without raising the temperature. It may indeed rather be necessary to provide for cooling it so as to secure the desired churning temperature. Cream of different ages should never be churned together without having been mixed together for at least 6, better 12, hours, and it should be well stirred as each batch is added.

If cold water or ice deep-setting cream is used, it may be kept in the same cold water tank until 12 hours before churning and then the temperature should be raised to 60 or 70 deg. either in the manner before suggested or by heating the last cream (but not higher than 100 deg.) before adding it. If this is done, it is well to do a little calculating. Let us say that we have the cream from three milkings in all 30 lbs. and find the temperature to be 50 deg. and that we have to raise it 15 deg. This is 15×30 , or 450 heat units. Divide them with the weight of the last cream (10 lbs.) and we find that there must be heated 45 deg. above 65 deg. or to 110 deg. in order to get all to 65 deg. Remember to make sure of the temperature by reading the thermometer twice with 5 or 10 minutes interval. With separator cream the last batch should be added, 20 to 24 hours before churning, and, as a rule, a little higher temperature should be used, say 65 to 75 deg. If we use a "starter" 60 to 65 deg. may be enough.


It will then be seen that no fixed temperature can be given. We want to reach a certain degree of acidity and if the original acidity (system of raising or age of cream or addition of a "starter") is the same then the temperature to be used depends, within certain limits, on the time we desire to devote to it. Personally, I prefer the given temperature for farm work so as to get the cream ripe for churning in 6 to 12 hours for shallow and deep-setting and 18 to 22 hours for separator cream.

CREAM-RIPENING IN CREAMERIES.

It will, however, also depend on the facilities we have for cooling the cream just before churning. Thus I know creameries that use 48 hours and a temperature of only 50 to 55 deg. with good success, and while I consider that temperature conducive to development of poor flavors, there are creameries where the practical exigencies demand it on account of lack of cooling facilities.

Where the very best cooling facilities exist, I would much prefer to hasten the ripening and use even a higher temperature than mentioned above, let us say between 75 and 85 deg., which, together with a "starter" will nearly ripen the cream in from 6 to 7 hours and thus allow it to be cooled to 60 or 55 deg. before bed time, and then ripen fully while cooling further during the night. As a rule one hour's cooling in the morning will then bring it down to the lowest desired churning temperature.

The common cream vats used in American creameries are rectangular tin vats hung in a wooden, watertight tank, which allow for a space with hot or cold water. Some of them are provided with space into which to put ice. See Fig. 26. Some

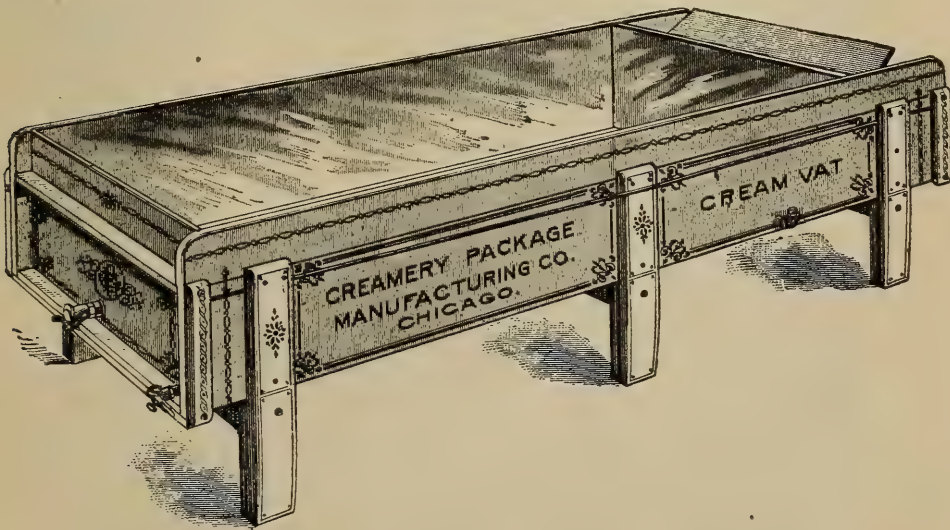

[Fig. 26.]

are made U shaped and these are better still, and others, the twin vats have two narrow vats in one jacket. It is evident that a large body of cream is only slowly heated or cooled in these and that constant stirring is necessary, hence we find that many makers are obliged—often against their better con-


viction—to use ice directly in the cream. If perfectly pure ice (made from distilled water) is used, and it is crushed fine and kept stirred until dissolved or nearly so, there is no harm done. But pond and stagnant river ice is a fearful source of all kind of contamination and, if it is left in large lumps without stirring the cream, will be unevenly ripened, so that this system of cooling should be discouraged.

The fact is that the question of giving the creamery buttermaker complete and quick control of the temperature in his cream has not as yet been solved satisfactorily, but since the introduction of refrigerator machines a very great step ahead has been taken. Thus the cream room itself can now be kept at a uniform temperature of 50 to 60 deg. (instead of 70 to 90) and there the temperature of a large vat of cream will not rise or fall much during the night.

As to the cooling in the vat various systems have been tried. In one creamery they tried to cool it with the air by having the vats without jacket, but experience taught them what they might have known, that air does not conduct the heat (or cold) as well as water.

Others have placed ammonia coils in the water space of the jacketed vats, and that has done fairly well, though it were better still to have the vats of tinned copper in which case brine could be circulated and the cooling done much quicker, but the cream must be stirred in both cases until the desired temperature is reached.

Cooling the cream to ripening temperature, even if as low as 60 degrees, is the simplest matter and can best be done by substituting an improved Baer Cooler, made by the Barber Manufacturing Co., for the conductor from the separator to the vat. In this way hundreds of creameries could cool and aerate the cream sufficiently even with water. If it is made of copper the brine system may also be applied. In Fig. 27 the cross-section shows the corrugated surface which compels the milk

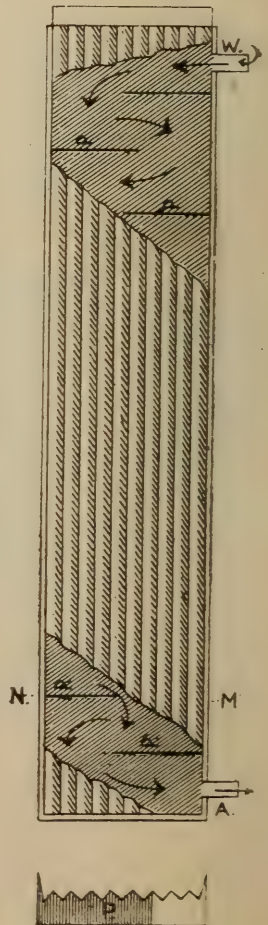


[Fig. 27.]

to run in the little gutters and increases the cooling surface. Also in *p* the partitions which turn the current of the water which flows as the arrows show on the exposed part of the sketch. The milk flows, of course, in the opposite direction and on a length of 8 feet, 2 inches drop is fully enough; indeed, they may be placed nearly level.

The great trouble is to change the temperature in a large vat of ripened or nearly ripened cream with reasonable dispatch.


It is done in some creameries by having an extra cream vat and pumping the cream to be cooled over a direct expansion (or brine) cooler.

I have suggested (Chicago Produce, Sept. 25, 1897) the use vats (holding one churning, only, say 1,500 lbs.) on large castors. See C. V. Fig. 28. These vats are in a refrigerated cream-room, cross-section of which the illustration represents. The cream being cooled to ripening temperature on its way from the separator, is when nearly ripe, elevated on a large elevator and run over a cooler *L* into an extra vat. When churning time comes the vat is again elevated and the cream run through a conductor to the adjacent churn room. The advantage is to have no pumps, and yet have everything on one floor, the disadvantage is the cost of elevator. The system has not been tested in practice.

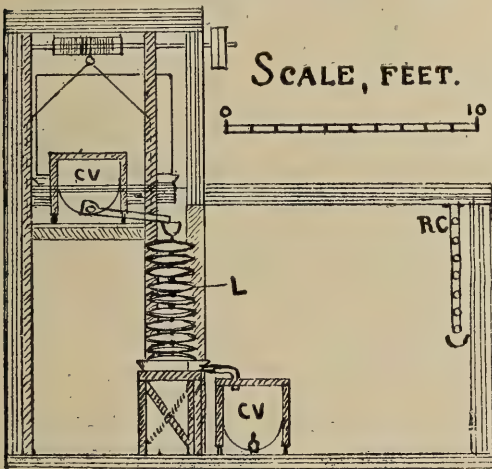


[Fig. 28.]

Of other cream vats should be mentioned the Boyd vat, Fig. 29, in which a coil swings slowly back and forth. (Mr. H. B. Gurler, I believe, first constructed and uses even now, one in which the coil hung by its four corners, is lifted up and down.) Hot or cold water or brine is passed through the coil. Mr. Boyd has no water space,

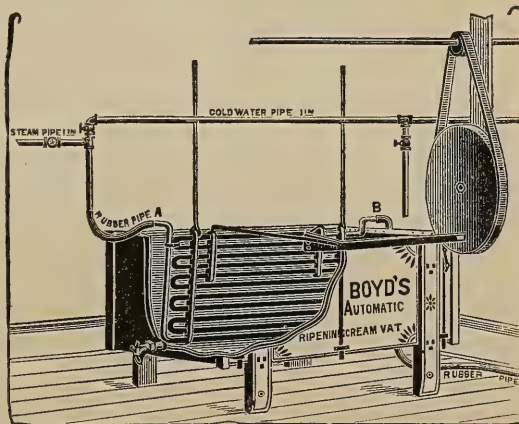

[Fig. 29.]

but insulating felt around the vat. Cornish & Company, of St. Paul, have modified and improved this vat, as shown in Fig. 30, making the cooling coil revolve on a shaft. This allows the cover to remain on, which is an advantage in a warm room, and where it is desired to exclude the air. Mr. Boyd

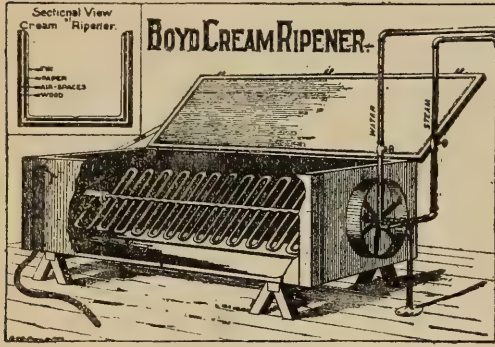

[Fig. 30.]

also makes "Starter" or Fermenting cans as shown in Fig. 25, and part of his system is to close up the cream air-tight and not stir at all while ripening. With perfect milk this is all right, but at our creameries where the milk is often far from perfect, I prefer stirring and aeration,


especially during the first hours.

Control of temperature and ease of keeping everything most scrupulously clean are the most important requisites, and, if an acid test is used, the maker should have no difficulty in securing uniform results in ripening.

As soon as all the cream is in the vat see that the temperature is right and take the degree of acidity of the cream and of the "Starter" if such is used, also the temperature in the room. Add starter as experience has taught you will be needed and stir thoroughly. Stir every half hour or so for the first 3 or 4 hours. In the evening before leaving it for the night, take the temperatures in cream and room as well as acidity of the cream. If needed, raise or lower the temperatures so as to have it right next morning. After some practice you will soon be able so to regulate matters that you will not only have the right acidity but also nearly the right temperature within half an hour or so of the time you want it.

SIGNS OF RIPENESS.

To tell in printer's ink when cream is ripe is very hard, the nearest I can get is that it should have a clean, pleasant acid taste and smell and a smooth, even, syrupy consistency, so as to run evenly and smoothly from the stirring paddle and have a peculiar, glossy surface. But even the finest nose and palate may get out of order, and hence the Mann's or Prof. Farrington's acid test should be used in creameries. In dairies I do not recommend it for other than

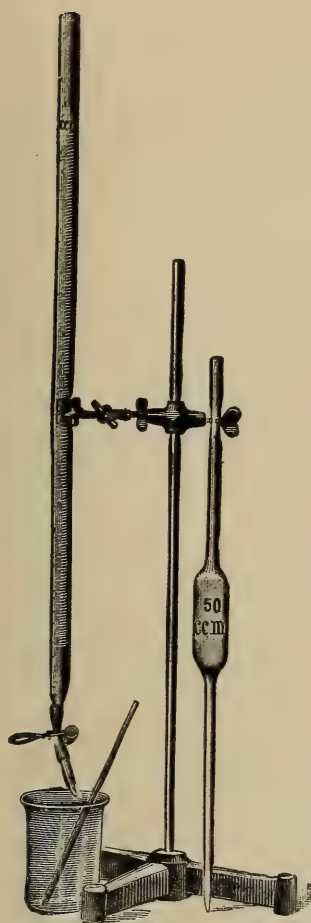

Mann's Acid Test.

experimental purposes. To get the highest flavor, Prof. McKay, of Ames, has found that 35 to 38 cc. is the best, and I have had good results between 33 and 39 cc. The former is about 0.65 to 0.68 per cent acid, whereas Prof. Farrington recommends 0.6 per cent.

When we speak about cc it means that it takes so many cubic centimeters of 1-10 normal alkali to bring out a pink color in 50 cc milk, to which has been added a few drops "indicator."

I refer to the book on "Milk Testing" and shall only lay stress on the fact that the test can be used only as a guide for comparing our own work, and even then we must look out for two causes for variation—richness of the cream and the weakening of the normal. In comparing with others we have these troubles as well as that of the variation in the eyesight. Hence, no rules can be laid down any more than for temperature used.

STARTERS.

Commercial starters have been mentioned before and the manufacturers give full directions for use. Remains only to suggest the making of a good home-made one.

The milk used should be from a fresh-milking, healthy cow and extra care taken to secure it in a cleanly manner. Run it through the separator before the other milk (so as to have the machine clean), condemn the first quart or so run through and gather as much as needed in a carefully cleaned and *boiled* can. Or, set it in ice water for 12 hours in a "boiled" can, skim the cream and dip out what's needed without disturbing the bottom layer.

Skim milk thus secured is better than new milk, but if either of these two skimming systems cannot be used it is better to use new milk.

Regulate the temperature (in a hot water bath) to 85 or 90 deg. and place the can in a hay box, or where the tempera-

ture will not drop below 75 deg. and leave it undisturbed until loppered. It should be watched so that when loppered it may be used soon after, or removed *at once* to a refrigerator or hung in ice water. Care should be taken not to shake or disturb it, so as to break the curd and let out whey. If thus chilled at once it may be kept in good condition if undisturbed for 24 hours or more.

When it is wanted for use, skim an inch of the top (as this may have become contaminated) and stir the rest up so as to have a homogeneous, smooth mass, which should have a clean, sharp acid taste and a pleasant aroma, and, if cut, show a clean, solid face without bubbles or pinholes. If it is in any way tainted, condemn it and ripen the cream at a higher temperature without starter. Take care not to fall into a rut and use the starter automatically. This refers to all starters.

Add the desired amount to the cream and stir well, perhaps a little more during the first hour or so than when no starter is used.

In creameries so situated that they cannot get enough "perfect" milk, it may be developed by taking sufficient of the regular skim milk and heating it to 180 or 190 deg., keeping it so for 20 minutes and cooling it to about 90 deg. and adding 10 per cent of "starter" prepared as above described. In 24 hours there will be enough "starter" besides ten per cent to develop enough for next day's use with another batch of pasteurized skim milk, and so on.

If today's butter is perfect it is safe to preserve some buttermilk free from salt and water (by chilling in ice water immediately after churning), and use that as a starter; but, it is evident that if there is any fault in today's butter the buttermilk will perpetuate that fault even if next day's cream is *perfect*.

There is the same objection to using part of today's ripened cream as a starter for the next batch, nor do I believe that cream makes as nice flavored a starter as skim milk.

Thus "many roads lead to Rome" even in the matter of "starters," and judgment must be used. I do not believe in using more than 3 or 4 per cent for unpasteurized cream, and 8 to 10 for pasteurized (this will be mentioned later), but I should always use more starter for a very rich cream than for a thin one.

CHAPTER VI.

CHURNS AND CHURNING.

THE THEORY OF CHURNING.

The oldest theory of the churning process was that the little fat globules in the milk were covered with a membrane which had to be torn before the globules would adhere together and form butter granules (pellets). This should be done in the churn and it was also claimed (Romanets) that the souring of the cream would dissolve this membrane or skin. This theory was up held to the last by the late Prof. Arnold.

Later it was disproved in several ways by various scientists, while the practical makers went on and found that having the cream of a certain ripeness and temperature, they could as a rule rely on the butter "coming" on time. (Speaking of temperatures it is amusing to notice how in olden time the "wise women" used to drive the witches out of the cream by putting a *red hot* horseshoe in it).

Later, again, Dr. Storek (Denmark) published the result of a long series of investigations, and concludes as follows: "If the old theory of a membrane round the globules is not adopted, then the only explanation is that the serum in the cream is split up in two parts during churning, one, containing more albuminates, going into the butter and the other, containing less forming the serum of the buttermilk."

But we need not bother our brains about these theories, it matters not whether a membrane exists or whether simply the serum adhering to the globules is of a different composition, though it seems to me the latter theory is indirectly confirmed by Dr. Babcock, who asserts that the small amount of fibrin in the milk has a tendency to adhere to the globules and delay the creaming.

CHURNING TEMPERATURES.

The various conditions which have influence on the choice of the churning temperature may be classed as follows:

(1.) *The composition of the butterfat.* (a.) Different breeds seem to produce butter of different firmness, thus the Jerseys give the firmest butter and require a higher churning temperature—all other conditions being equal. (b.) The longer the cow has been in calf the more firm becomes the butterfat and hence the churning temperature must be higher. (c.) Effect of feed is illustrated in the cotton belt where excessive feeding of cotton seed makes a churning temperature of 70 to 72 degrees not uncommon.

(2.) *The acidity of cream.* Prof. Fjord demonstrated years ago that sweet cream must be churned at a lower temperature than that ripened—all other conditions being the same.

(3.) *The richness of the cream* has also an influence in so far that a rich cream (say with 25 to 35 per cent fat) may be churned at a much lower temperature than a thin one (below 20 per cent) and thus reduce the loss in buttermilk. This Mr. H. B. Gurler demonstrated first churning the former as low as 46 to 50 deg, while the latter cannot be churned much below 56 deg.; if too cold it will foam.

(4.) *Construction of the churn* as well as speed and amount of cream in the churn should also be considered in determining the *starting* temperature, as the heat produced by the different mechanical actions may vary greatly.


(5.) *The temperature in the room* should also be considered in choosing the starting temperature of the cream, and not only made a trifle lower in a warm room than in a cold one, but the churn itself must either be cooled or warmed or else the difference in the starting temperature must be made greater. It is indeed also necessary to have the finishing temperature vary a little according to that of the room.

It is thus shown that no fixed rules can be laid down, yet the limits may be said to be from 55 to 70 deg. for cream testing 20 per cent or below, and from 46 to 60 for rich cream. I believe that when it is found *necessary* to use the highest temperatures the butter will be "steariny" and, as a rule, deficient in flavor. Experience will soon teach us the right one and as a general proposition churning should be finished in from 20 to 60 minutes to get the best result.

The thermometer may be wrong, indeed I have found them to vary 10 deg., and hence the necessity of finding the right temperature by the thermometer in use. It is well—if it can be afforded—to buy a standard certified thermometer at \$1 or \$1.50, and hang in the parlor in order to compare the cheap ones in use at various temperatures. But it should not be exposed to repeated and violent changes as that will spoil the best one in the course of time. Of the cheap ones I prefer a plain glass one (floating) to those fixed on wood or metal—they are easier to clean.

CHURNS.

I doubt if there is any other implement on which more patents have been taken than on the churn, thus in the states 2,250 were taken out from 1800 to 1892, and yet how few new principles have been developed. About 2000 years ago, Pliny described an up and down dash churn very much the same as the one yet made and sold in most countries (Fig. 31) in which just as good butter can be made as in the very latest "patent" even though it does take more work.

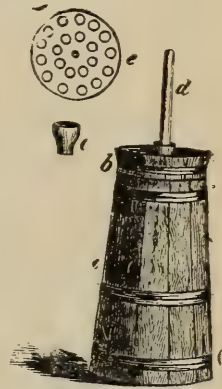

(Fig. 31.)


The Old Russian Churn (Fig. 32) (from Martini's "Kirne and Girbe"), which is a stone jar in which the stirrer, provided with anchor-like prongs, is twirled round and round between the hands, may be said to represent our modern revolving dash churns, of which the Danish (Fig. 33) represents the vertical and the "Blanchard" the horizontal system.



(Fig. 32.)

The next development was the revolving barrels with various

kinds of fixed dashers; were such as the old Swiss "Grindstone" churn. But evolution reduced and simplified these to the end

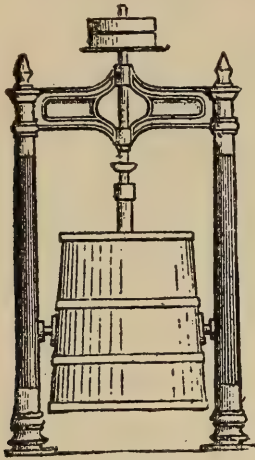


(Fig. 33.)



(Fig. 35.)

over revolving barrel. (Fig. 35), and the Curtis rectangular churn, shown in Fig. 36, which may be said to be the two most

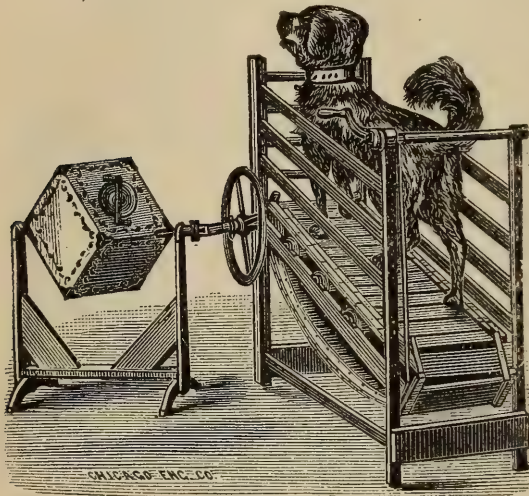


(Fig. 36.)

popular dairy churns in the West, while the Davis Swing must be added for the East. The old churn made of the skin of a goat, or a hollow log, hung up and swung from a branch of a tree is represented among our modern churns by the "Davis Swing Churn," Fig. 38.


While in Europe the creameries generally adhere to the vertical churn with revolving dashers (Fig. 33), the large box churn (Fig. 37), of which some are made to open like a trunk, (easier to clean and aerate, but harder to keep from leaking while churning), have kept the ground until lately, when the combined churns have taken their place in part.

In 1840 Mr. Clifton introduced air

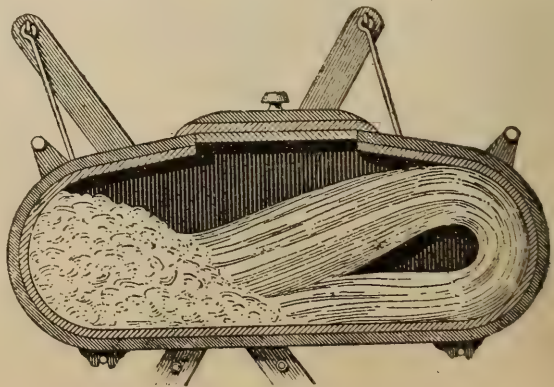

(Fig. 38.)

through a hollow up and down dasher and in 1896 or '97, a Mr. Norcross introduced it through a hollow revolving shaft with a kind of turbine attachment, as something new and

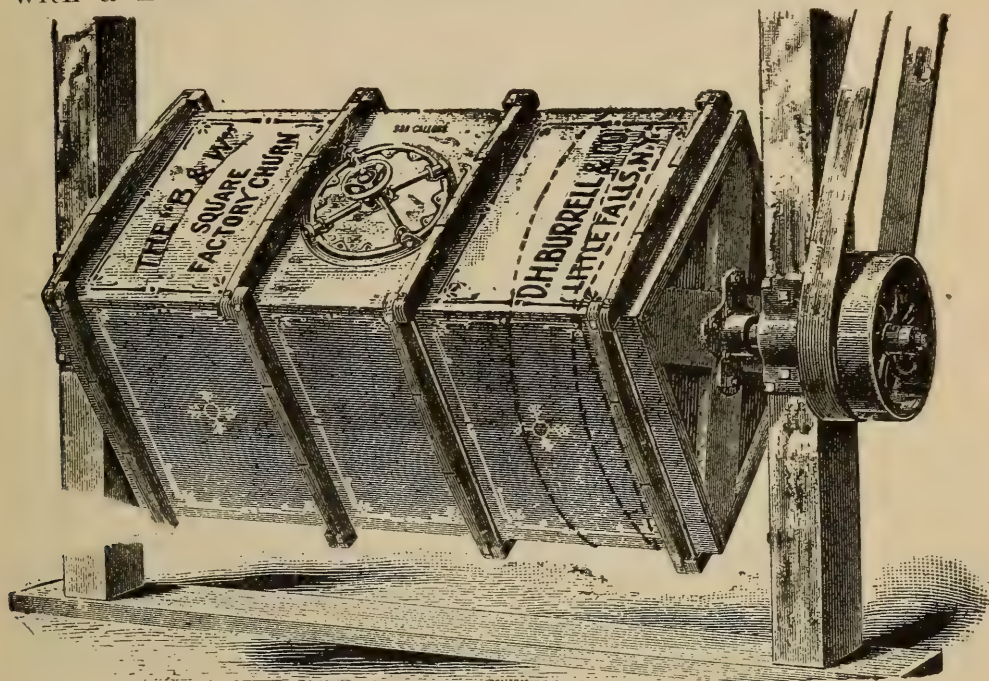


(Fig. 37.)

wonderful. Neither has any more value than the innumerable patent (?) lightning churns.

Next must be mentioned churning with air bubbles forced into the cream by an air pump, first proposed by Doehn, of

Berlin, in 1887, and in 1889 by Walter Cole, of Melbourne, Australia. I illustrate this system in Fig. 39, Rolands (France), and, while no special advantage has been demonstrated, as to the mechanical effect (rather the reverse) of this system, I can but believe that for

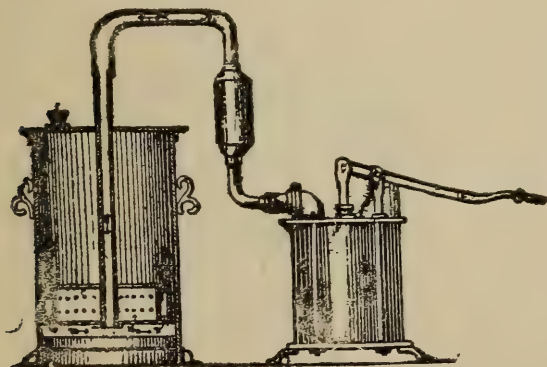

(Fig. 39.)

certain purposes (churning cream more or less tainted) it might have some effect in improving the quality. I understand that experiments lately made in Illinois have run against difficulties when tried on a large scale.

CONSIDERATIONS IN CHOOSING A CHURN.


In buying a churn the following points should be considered. (1.) *Ease with which it is cleaned.* (a.) Close grained hard-wood is better than any softer wood, hence white-beech and oak or ash is preferable to pine but in large box churns the element of warping must be considered. (b.) The fewer corners and projections, (fixtures), and the more air and light that can be had (large openings) the better it is. (c.) Glass peepholes, fixed thermometers and putty should not be tolerated, with a little experience there is no need of looking very often, and then the cover may be removed. (d.) Of dash churns those with movable dashers are preferable to those having them fixed.

(2.) *Exhaustiveness in churning.* Conditions being right for the churn and cream in question the exhaustiveness will as a rule be nearly the same, provided the time used is not less than 15 or 20 minutes. In all so-called lightning churns claiming to finish in from 2 to 5 minutes the loss of fat in buttermilk will be great, and the quality of the butter inferior. If you want to test the exhaustiveness of a churn, use it exactly as the manufacturer tells you and then test the buttermilk. If it does not show more than 0.2 for thin cream and 0.1 per cent for rich cream, churned at a low temperature, you may be satisfied.

(3.) *Power* required to churn a given quantity should also be considered, but should give way to the other points. (4.) *Solidity* in construction. (5.) *Condition* in which the butter comes. If you have followed the manufacturer's instructions, the butter should come in nice, regular granules, and not too soft. Yet, if you otherwise like the churn you may by lowering the temperature or otherwise changing the conditions (speed), find it satisfactorily even if the time used is longer than claimed.

COMBINED SEPARATORS AND CHURNS.

Mr. Johnson, of Sweden, first invented the "Extractor," Fig. 40, a separator inside of which a churn apparatus (c)

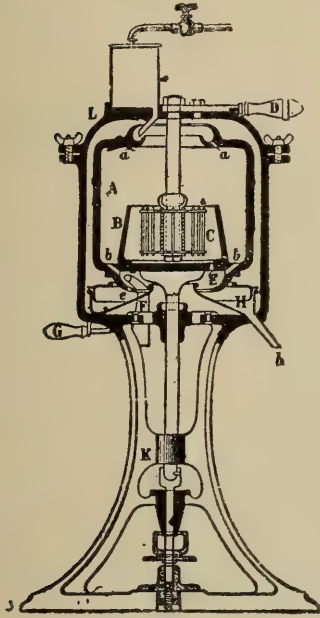


(Fig. 40.)

churned the sweet cream as fast as separated and consequently produced sweet cream butter. Later Mr. Wahlin, also a Swede, constructed the "Accumulator," a similar combination, and the latest is the "Radiator," a wonderfully perfect machine, but the product—"sweet cream butter"—does not seem to take well on the English market, according to the last report of the Swedish Dairy Agent.

But even if the product did sell well, it seems absurd to try to combine two machines which requires a different temperature to do good work.

COMBINED CHURNS AND WORKERS.

In this case the temperature desired is about the same and indeed in a warm room the advantage of being able to work the butter without exposing it to the air is considerable.

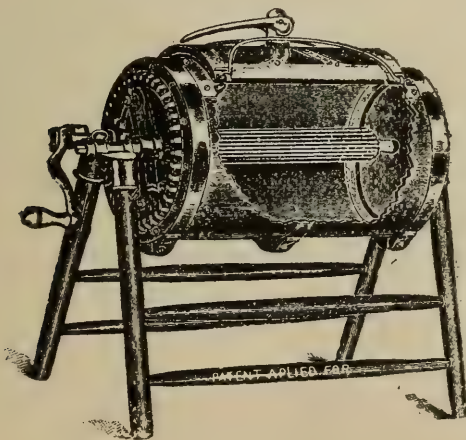


(Fig. 41.)

Various constructions have been made. The first I saw (in 1893) was the "Owen" Fig. 41, in which the working part was removed, while churning. This does not seem to have come into use, and later the "Disbrow," the "Wizard," the "Victor" and "Barber's," all having fixed rollers, appeared. When there is trouble it is generally because a beginner neglects to

follow the directions for use strictly.

The standard churn and the most popular in the West is undoubtedly today the "Disbrow," which is illustrated in Fig.

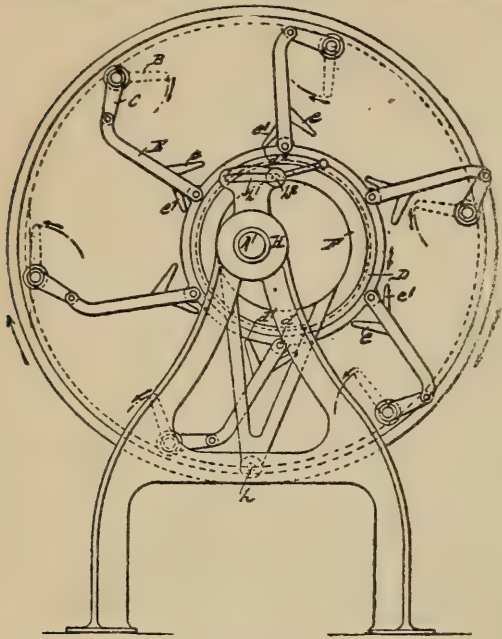

(Fig. 43.)

fixed dashers. When working the butter a set of cranks shift their position, squeezing the butter against the drum as it slowly revolves.


I have not seen it work or got the opinion of those who have used it, but believe the "action" should be very good though the power required in working must be considerable.

I understand that D. H. Burrell & Co., of Little Falls, N. Y., are about to place on the market a combined churn and worker, in which the process of working is in full sight; the butter may be salted while working and removed on a tray without using ladles or spades. When used as a churn it is free from all inside fixtures.

Considered as a churn, the natural objection which we have to all inside fixtures making cleaning more difficult must be raised, but with proper care these churns can be kept clean and the churning is as exhaustive and the power required (so I believe, though I know of no tests) is likely to be considerably less than with the box churn. The butterworking part and its combined merits will be discussed later on.

42. As shown in the cross-sections, the rollers are in the center, while, for instance, in the "Victor," they are near the periphery of the churn. The latter is also getting very popular.

Another construction altogether is the Sharpless "Squeezer," shown in a cross-section. Fig. 43. It consists of a revolving drum provided with 6 shelves which are pivoted so that when used as a churn, they are converging to the center of the drum, thus serving as

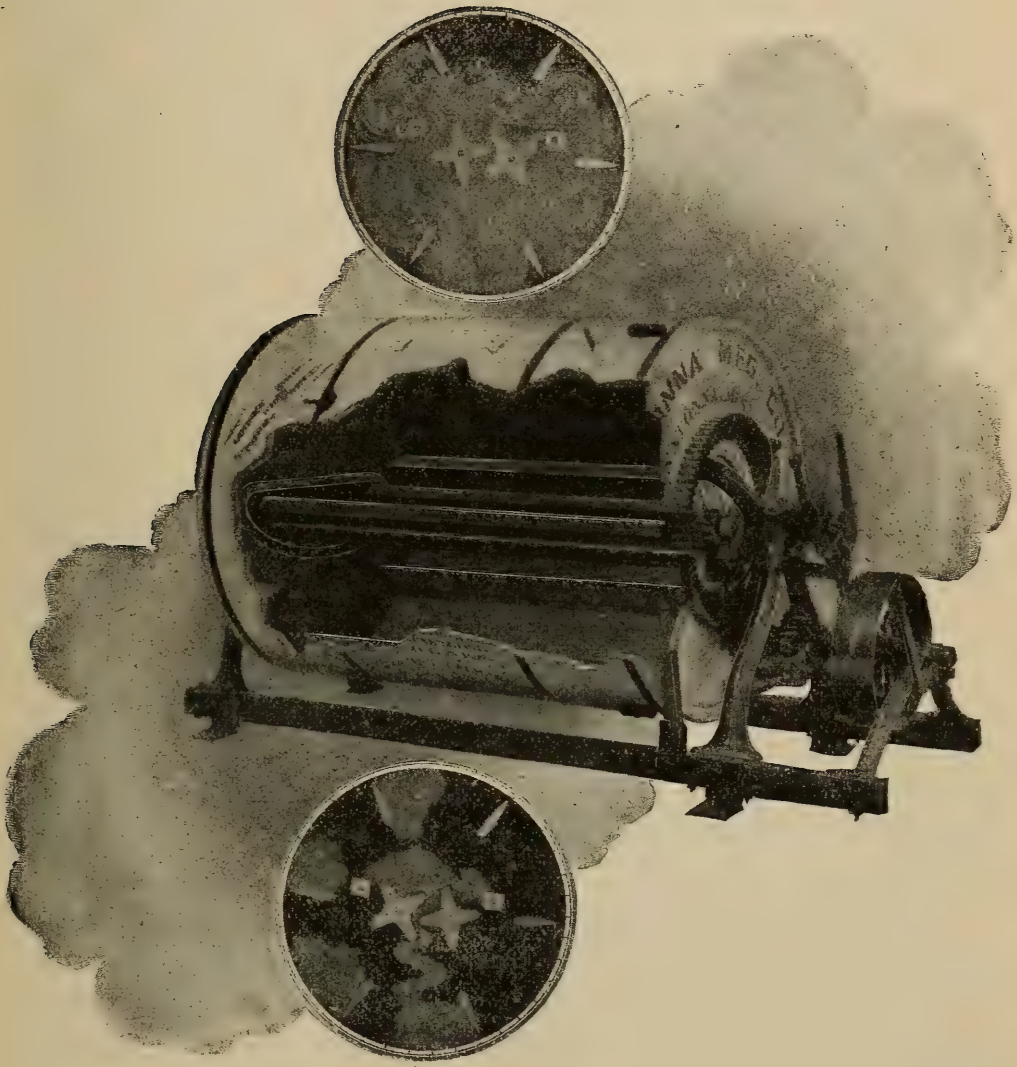

(Fig. 42.)

HANDLING THE CHURNS.

With a new churn, there is always a danger of the wood imparting a flavor to the first batches of butter. Various ways are taken to prepare it. I have used the following with pretty good success: Soak for 24 hours with cold water, changing it two or three times, churn for half an hour with hot water and some lye soda or other alkali. (Unleached wood ashes are very good too). Rinse and churn with hot water. In doing this don't forget to ventilate by opening the cover or the plug a little as otherwise you may have an explosion. Soak with sour milk or buttermilk, rinse with cold water, churn again with alkaline water and finally with hot and cold water.

Just before churning always rinse it with hot and cold water, and in cleaning it rinse with cold water, then warm, and finally boiling water, using alkaline water now and then as needed.

Lime water is a splendid thing to use and the small churns may be filled up with it after scalding and left with the small utensils in it to soak up to time of churning. In case of large churns, churn with 3 or 4 bucketfuls for 5 or 10 minutes and draw. There is no need of further rinsing, what little adheres will not hurt the cream.

In creameries steam should be used instead of boiling water and long enough to make the wood hot enough to dry itself, but combined churns should, according to instructions from the Owatonna Mfg. Co., not be steamed, as it will hurt them.

Covers should be left open and small churns placed in open air to dry unless filled with lime water. A churn continually damp will soon smell musty and that is the great danger with our large creamery churns compared with the small Danish ones.

Never fill the churn too full, as a rule it is safest to put in less than the manufacturers tell you. End over barrel and box churns should not be filled more than half, but it really depends on the "fall" that is left, that is, if a churn 24 inches deep may be half filled, one only 18 inches should not be filled so full, as that would give the cream a 9-inch instead of a 12-inch drop.

It is always safest to strain the cream into the churn and the coloring should be calculated according to the butter expected. It is easy to keep track of how much milk each cream vat represents and use yesterday's yield for an estimate.

There are two kinds of color in the market among those most used. To one belongs "*Chr. Hansen's Danish*," an absolutely pure Clunatto color, and "*Thatcher's*," a pure vegetable color. The other is one into the composition of which tar colors enter. *Wells and Richardson's* and *Hansen's Columbian*). The advantages of these two are strength, no sediment and cheapness. In the West, *Wells & Richardson's* has become very popular.

Some countries (as Denmark) prohibit the use of tar colors, but that is done to make their butter above suspicion, not because it is deemed dangerous. There are various kinds of tar colors, and if selected by a reliable manufacturer it is absurd to talk of danger.

The quality of oil used in the color should also be considered as well as the brightness of the shade imparted.

Start the churn, and do not forget to ventilate it once or or twice during the first minutes and then make sure of the temperature.

After this, strike the right gait (given by the manufacturer) keep it going steadily—do not get curious and stop to look at it until the regular time has elapsed or the change in the sound warns you that the cream is "broken." If you are musical a song may help you to keep time. If it should not come on time, stop and take the temperature, and if that is wrong correct it by adding hot or cold water. It is also a good plan to take the temperature and regulate if necessary when it is "broken." Then churn again a little slower, but with a steady motion till the granules are of the right size. Some makers prefer them $\frac{1}{8}$ others $\frac{1}{4}$ of an inch in diameter. I think the latter a little too large and prefer the size between the two.

CAUSE OF FOAMING.

Sometimes if the butter does not come, the cream may foam and nearly fill the churn. This may be caused by (1), the cream being too cold (especially if a thin cream), (2) the churn being too full to start with, (3) too high speed being used in starting and (4) the milk being delivered from cows

just calved (biestings) from strippers or sick cows. Sometimes it will mend itself by allowing the cream to stand quiet for an hour or so, but the safest in the first cases is to divide it into two churnings and start fresh at the right temperature.

DRAWING THE BUTTERMILK AND WASHING.

When the granules are of the right size, and if salt in the buttermilk is not objectionable, the addition of this will make it draw better, but I have seldom been troubled that way and there is no need of losing a single granule, as a strainer, or better, a hair sieve, should be used in drawing.

When this is done, about the same amount of water of from 50 to 55 deg. should replace the buttermilk (if the granules seem very soft 45 deg. may be allowed); the churn should be turned a few times. Unless it is desired to harden the granules the water should be drawn *at once*. It is a big mistake to have the butter to soak in water for hours. As a rule two rinsings should be enough and indeed some of the finest butter is made without rinsing at all, relying on the working to remove the buttermilk. The Danes used to do this, but now they rinse the granules by dipping them from the buttermilk with a hair sieve and then moving this gently in a tub of cold water, thus washing the butter only once and only for a minute or so. As in most other matters the best road lies in the middle course.

Too much care cannot be exercised in securing pure water for washing the butter, and I am convinced that in many cases the butter is spoiled by impure water.

If we have deep artesian wells, where no surface water is possible, the water is alright unless indeed it contains too much iron or other *mineral* impurities. But with dug wells it would really be best to boil, cool and filter the water used for washing. If this is too much trouble, at least filter it, and for this purpose the International filter is to be recommended if a smaller size is placed on the market (the one now sold for \$110 will filter from 800 to 1,000 gallons per hour).

Dug wells into which the creamery or stable drainage has a chance to leak should be condemned, and indeed no creamery should be built without first providing the water supply and have it analyzed chemically and bacteriologically even if it cost from \$25 to \$50.

CHAPTER VII.

SALTING AND WORKING.

Brine salting is popular with many private dairymen. After draining the buttermilk or after the first washing a strong brine is poured over the granules, the churn revolved, the brine drawn and a fresh lot of brine added. When this is drained, the granules are packed directly into the tub, pail or crock by simply pressing it with the butter ladle. This is a very nice way of selling brine for butterfat and if private customers are satisfied so much the better, but it is not an advisable system selling on the open market. First it is difficult to get it salty enough and if this is done by adding some dry salt it is very hard to salt it uniformly.

The object of salting is to preserve the butter and improve the taste. This is generally understood, but less so its action in drawing out the buttermilk from the buttergranules apparently washed clean. In churning, the microscopical fat globules are joined together into the little visible granules and these contain a great deal of "serum"—buttermilk. The dry salt sprinkled over the drained granules will, in melting, absorb part of the serum chiefly the milk sugar solution, leaving most of the albuminous matter, and the moisture is thus reduced with less working than is otherwise needed.

APPLYING THE SALT.

Some makers sprinkle half the salt in the churn revolve it once, sprinkle the other half, and after a while, work it once. In this way it is rather difficult to get uniform results as it is hard to estimate the amount of moisture and the consequent loss by drainage. Nevertheless, many makers manage to do good work that way and while they use from $1\frac{1}{2}$ to 2 ounces of salt, the butter will only retain from $\frac{1}{2}$ to $\frac{3}{4}$ ounces,—and in this connection we must also consider the solubility of the salt used. If lumpy, the salt should be crushed and sifted.

In Denmark they work the granules very lightly and then weigh the butter, add the salt and work lightly again, leave the butter in a temperature of 50 to 60 deg. and after 2 to 4 hours, work it the second time. I prefer now simply to weigh the granules and as the weight of the butter is known approximately, a fair idea is given of the moisture and more or less salt may accordingly be added to the granules. After stirring it in with a light touch,—the granules should be firm enough to stand this without adhering—leave the salt to dissolve partly for half an hour or so and work it lightly the first time. After 2 to 4 hours work it the second time and there will seldom be complaints of mottled butter.

Indeed I believe it to be a fact that we are getting back from the once fashionable “wash, wash, no working” system to that of the good old “working twice.” In creameries this weighing of the granules is impracticable and we must rely on our judgment as long as we do not adopt the cumbersome Danish system. The trouble is that few makers understand that it is far better to work several times a little at a time than to work once. They forget that the danger of getting salvy butter is greater in the latter case, where the mechanical heat developed by the continuous working makes the butter soft, whereas the butter regains its elasticity if we give it a rest before working it again.

The temperature is all important. If too cold the friction in softening it while working will make it greasy. If too warm it will not stand working and the moisture will be worked into instead of out of the butter. Between 50 and 60 deg. (according to the composition of the fat) will be found right and creameries should have their worker (as well as churn) in a room which can be kept at that temperature. If the butter is left between workings in a too cold (or too hot) room, say in 60 lb. tubs, there is danger of the outside becoming too firm (or too soft) before the center is cooled enough and the result will be streaky butter. For this reason the Danes prefer to leave it in lumps of 5 to 10 lbs. at that stage.

SALT TO USE.

Years ago good dairy salt was much harder to get than now. Then, indeed, it had to be imported, and “Ashton,” “Higgins,” (and “Luneborg” used in Denmark) ruled the

roost, but now there are several excellent dairy salts made in the States, notably "*Diamond Crystal*," "*Genesee*" and a few others. The main thing is never to use coarse, impure salt, by impure I do not refer to chemical purity, which does not always insure it being the best.

But even the very best brand may have been exposed in transit and absorbed odors or black specks may have got into it, so that it is safest to test it by dissolving in water and see if it leaves any sediment or gives a milky solution. Mr. Gurler, in his "*American Dairying*," recommends the use of hot water to detect taints.

As salt absorbs odor it must be stored in a clean place and the careful dairyman will keep an eye on where his dealer keeps it.

We often hear creamery men say: "We use such and such a salt (mentioning a cheap brand) generally, but when we put up butter for cold storage we use so and so (mentioning an expensive salt). How is this? Is it all imagination? If not why can't they see that if the expensive salts are better for cold storage they are also better for every-day use. There may be good salts among the cheaper brands, but until manufacturers have proven their ability to make them *uniformly* alike, it is safest to use those, year in and year out, which have been proved by years of practical tests.

I confess that I like a salt with a grain to it, so that when sprinkled on the butter it does not mush like fine sugar on berries. I also prefer a salt which does not dissolve too quickly, as I advocate working twice.

Right here there is a common clap trap device used by salt agents when they talk about the special make-weight or the clear brine of their brand. A good maker will always study his salt and act accordingly, leaving more or less moisture, according to whether the salt is less or more soluble.

THE WORKERS.


Good butter has been made by working it with the hands and if the dainty dairymaid washes her hands and arms carefully first in hot and then in cold water, there is no objection, but, to be on the safe side, the watchword is now given: "*Never touch the butter with your hands.*"

In small quantities butter may be worked manipulating




(Fig. 45.)

it with two paddles, like Fig. 45, pressing the lump flat in a wooden bowl, and then rolling it up and pressing it endwise, never rubbing it, but a small lever worker like Fig. 46 does not cost very much, and if the lever is not rolled or rubbed over the butter but used for pressing it, the result is very satisfactory. Another simple worker not sold here, but easily made, is shown in Fig. 47. It consists of a wide board with two strips of wood on either side and a corrugated roller on a wooden shaft long enough to form handles and two round pieces of wood which keep the roller about half an inch off the board. The roller presses the butter into a flat corrugated piece, which is rolled up with the

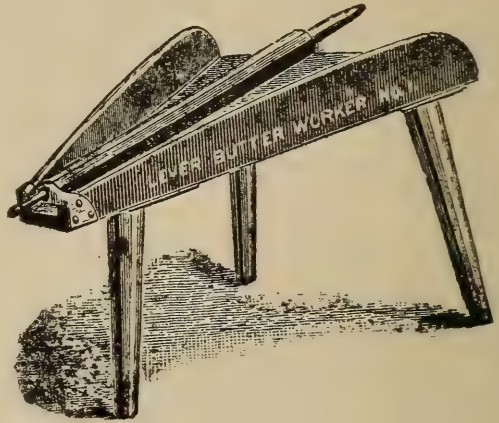

(Fig. 46.)

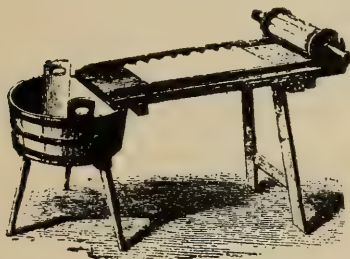


(Fig. 47.)

ladle and turned at a right angle and worked again as shown in Fig. 48. This also represents the way to work butter on the rotary worker, which is illustrated by one of the best in the market, the "Embree," and a cross-section one of the latest European modifications, Fig. 50. The "Schauble" iron frame worker is built on similar lines. The one most used




(Fig. 48.)

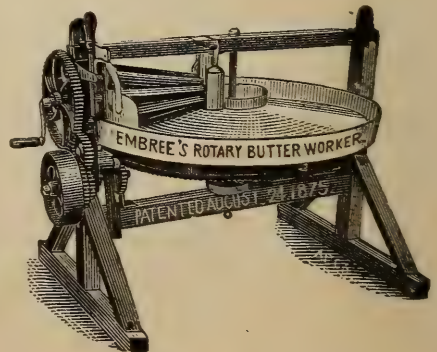

(Fig. 49.)

in the western creameries is the "*Mason*," but I do not consider it as good as either of those illustrated. Similar workers are made by the various manufacturers and have kept their ground in spite of hundreds of modifications which found

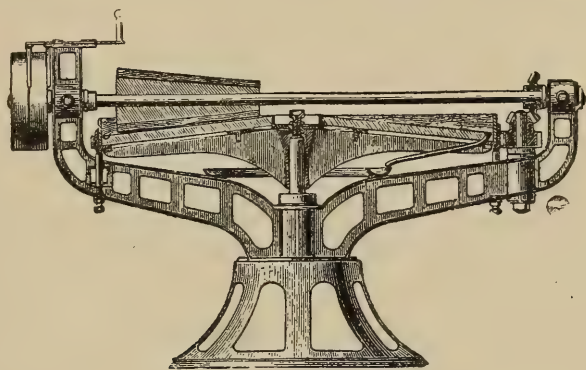

(Fig. 50.)

favor as labor savers for a short time. In buying these workers in which the table revolves one way and the rollers the other it is necessary that their surface speed correspond exactly, if not, there will be a rubbing motion making the butter greasy.

To describe when butter is worked enough is next to impossible. There should not be more than between 10 and 14 per cent water left; when a piece is broken it should show a granular construction like coarse cast iron, and when pressed with the ladle a few drops of clear brine should show. This is the nearest I can get, but experience will soon teach and the object is to avoid too much moisture on one side—selling water for butter—(laws regulating this are being enacted in various states and countries) and too little on the other side making the butter difficult to spread and losing weight.

USING COMBINED CHURNS AND WORKERS.

The popularity gained by these in our western creameries is undeniable and the reasons are evidently. (1.) Saving of labor in removing the butter from churn to worker. (2.) As most creameries are not provided with a special fly-proof room where the right temperature can be maintained, the keeping of the butter shut up in the churn and worker until ready to pack is an evident advantage. (3.) The saving of space is another great advantage.

Objections have been raised (1) that they are difficult to clean; (2) that it is very difficult to get the salt evenly dis-

tributed and hence there is a liability to mottles; (3) that the butter would retain too much moisture; (4) that the maker cannot watch it to remove specks if there are any, nor stop just at the right moment; (5) that some of the constructions would grease up several pounds of butter at each end of the inside gearing; (6) that they are expensive, and unless renewed often would be impossible to keep sweet.

I have virtually no practical experience with these churns, and have hitherto not encouraged their introduction, preferring to preach the providing of churn and working room so that the only advantage remaining would be that of saving labor and space.

On the other hand a close observation of the ways in which it has been used by some of our best makers and the resultant butter has convinced me that most of the objections must be negated. (1.) If they are treated as suggested for the other churns they *can* be kept sweet, at least as long as age has not made the wood too soft. (2.) By adding the salt (sifting it so as to have no lumps) carefully, distributing it evenly and letting the churn revolve a few times at the slow speed before setting the rollers going, an even salting can be secured, though a little more salt may be consumed. (3.) By having the granules of the *right temperature* and by working the butter twice or three times the moisture *can* be sufficiently expelled, especially if it is given 10 or 15 minutes for every 6 or 7 revolutions and allowed to drain. If necessary the temperature can be lowered between workings by placing some blocks of ice on the rollers. (4.) Practice will soon teach the maker to stop in time, and if churn, cream and salt are clean, there can be no specks to remove. (5.) This is true to a greater or lesser extent, but when 500 or 600 lbs. are worked at once the loss is not great if care is taken not to pack the greasy butter with the rest. The shelves should also be watched so that no lumps of butter remain permanently there (escaping salting), as if incorporated later on they will produce mottles. (6.) They may become expensive if renewed often, but that is a small matter compared with the saving in labor. While personally I am perhaps too much of an "old foggy" to adopt the new system, it would be unfair not to acknowledge that with careful work virtually all objections must be dropped while the advantages remain.

PREPARING LIME WATER.

Lime water is one of the safest purifiers for a creamery or dairy. In a creamery where there were two combined churns, I once had one of them rinsed the last thing with three buckets of lime water, and at the end of the week the buttermaker had to acknowledge that the one thus treated smelled sweeter than the other cleaned otherwise exactly in the same way.

To prepare lime water get two whisky or other clean barrels and knock one head out, bore one hole in the side about 1 foot from the bottom, another 6 inches higher and insert any kind of cheap wooden faucets. Fill with pure water and dissolve some unslacked lime, say 15 or 20 lbs. and stir it up well during the day. Cover and do not disturb it until it draws perfectly clear from the lower faucets. By having 2 barrels, 36 hours can be allowed for settling. When all the clear water is drawn, add a little more lime and fill again and so on. After being used for the churns and other utensils it can be used to great advantage in rinsing the floor. It is cheap and does not hurt the wood as will a strong lye.

BEWARE OF FRAUDS.

I have referred to the tin can separators(?) for the dilution of milk.

I have also warned my readers against all the patent lightning churns, in which it is said more butter may be obtained.

It remains only to warn them against the old, old fraud, which reappears under new names. An enormous increase in the butter yield is secured by addition of rennet, or similar stuff, which coagulates the casein, and this, with or without the addition of extra melted butter, is incorporated with the butterfat, making what might possibly be called a very rich cream cheese, but which has no right to the name of butter. Fifteen years ago it was pushed under the name of "Guinness" process butter, and a large creamery was run in Chicago which was used as a decoy to sell county rights. Later "Black Pepsin" was advertised for the same purpose, and now I notice that it is sold as "Richards Butter Rennet." As soon as the papers get onto the fraud the name is changed, and, no doubt, it will appear under a new name again and again.

Remember, if 100 lbs. of milk contains 4 lbs. of fat and you do your very best with the very best modern implements, you can never make more than 4.5 or 4.6 lbs. honest butter, and never hope to fool any buyer with more than 5 lbs., be the increase obtained with water or casein!

CHAPTER VIII.

PACKAGES AND PACKING.

FOR THE PRIVATE DAIRY.

For the dairies the Bradley Boxes Fig. 51, holding 2, 3, 4, 5 and 10 lbs. and packed in crates (Fig. 51a) are used a great deal, as well as the bail boxes (Fig. 52) holding 5, 7½, 9 and 10 lbs. They are very good and practical packages, accepted by the trade, the latter chiefly in the West.


One pound rectangular prints wrapped in parchment



(Fig. 52.)



(Fig. 51.)




(Fig. 51a.)

paper and sent in return boxes provided with an ice chamber. Fig. 53 is very popular in the East, and (packed solid) fast

gaining ground in the West. With the return boxes the difficulty is to keep the trays perfectly sweet, but this trouble may be over-

looked when a good price is secured. If packed solid the 54 lb. cubical or 50 lb. rectangular box is most used. There are numerous other packages, such as the "Record" tinlined package, the "Crystal," a glass jar in a galvanized pail, paper boxes round (the "Gem") and square, etc., etc., not to forget the old stone jars, but these are not popular among the men who handle the butter in the large

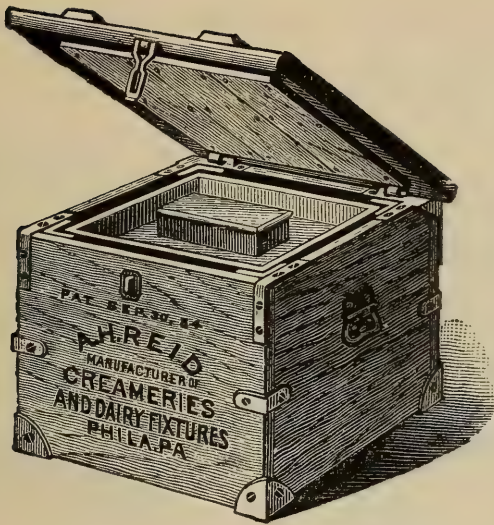

(Fig. 53.)



(Fig. 54.)




(Fig. 55.)

markets and should be used only for local trade or for private customers. Round and square prints are also suitable and are made with the hand moulds shown in Figs. 54 and 55. They should be wrapped in parchment paper or *new* muslin, never in the cabbage leaf or linen clothes of suspicious origin.

In printing it is also important to be sure that there is full weight and whatever printer is used the weight should be tried now and then even if each lump is not weighed before printing. A neat scale for this purpose with a porcelain plate is made by Fairbank & Co. The parchment should be soaked in brine.

FOR CREAMERIES AND LARGE DAIRIES.

When more work is desired we have a great many devices—the “Nesbit,” the “Rapps Automatic,” the I. X. L., etc.

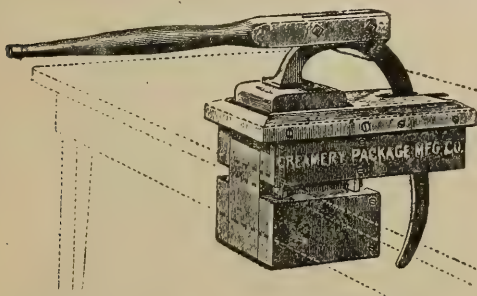


THE LAFAYETTE BUTTER PRINTER.

(Fig. 57.)


The most popular ones of this class—“single” printers — being those similar to the “Lafayette,” shown in Fig. 57. It is fixed on a table (indicated in dotted lines) and with a little practice very fast work can be done.

Quite another system is illustrated in Fig. 58, the "Acme,"

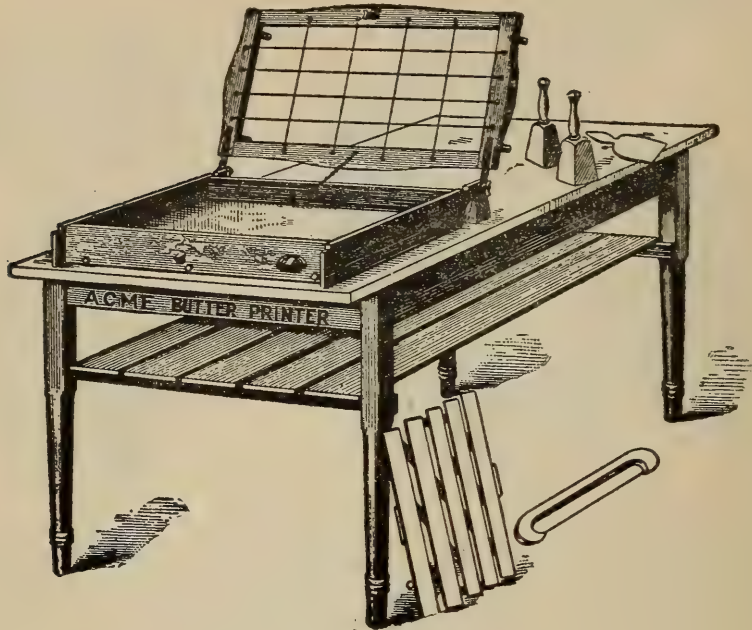

(Fig. 58.)

originally called the "Lusted," in which 25 1 lb. or 50 $\frac{1}{2}$ lb. prints are made at one impression. Finally in Fig. 59, I illustrate the mold used for the California two-pound roll, the standard size in that market.



(Fig. 59.)

Larger private dairies sending to the open market may safely use 10, 20, 30, 40 and 60 lbs. tubs same as the creameries.

Creameries in Europe nearly all use the Danish 56 and 112 lbs. beech firkin (Fig. 60) though in some countries the heavier oak may be seen. In America the standard creamery package is the 60 lb. tub (Fig. 61) made of white ash, with five black ash



(Fig. 60.)

hoops. Indeed, so wedded is the trade to this package that any divergency, even the least, may cause a reduction in

price. Thus it would be nearly impossible to sell Elgin butter at the market price even in ash tubs, if there were six hoops on them. Nor is this kind of prejudice altogether without a reasonable explanation, as the six-hoop tubs have been used largely by gathered cream creameries, and hence Elgin butter would at once be suspected of being such, and each tub would have to be examined as to quality. Nor would it look well in a carload to have some five-hoop tubs and some with six hoops.




(Fig. 61.)

These tubs are made in sizes to hold 10, 20, 25, 30, 40, 56 and 60 lbs., the lat-

ter being the one most used by creameries. A handmade tub is generally preferred, and though the machine made (staves tongued and grooved) are neater in appearance, they are not nearly so popular. The New York oak tubs are hooped with galvanized iron hoops.

Boston will take spruce tubs, but they are not very popular in the other large markets, they look very neat indeed when new, but do not come out of cold storage in good shape. The tub covers are fastened with various fasteners

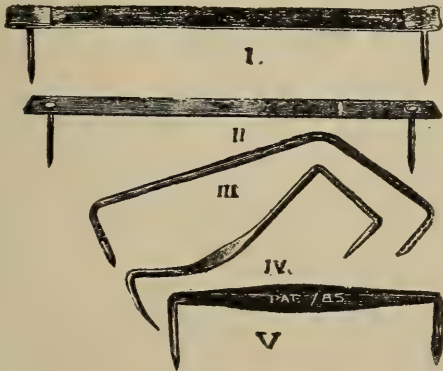

(Fig. 62.)

but the trade endorses only N. I and II, Fig. 62, tin straps fastened with half-inch wire nails.

For export to England neat oak 110 lb. firkins used to be the package, but now the Australian square box is the standard.

It is made of poplar and spruce and measures inside 12 x12x12 inches and exactly 56 lbs. should be packed in it, or rather a little more, so as to make it hold that on arrival in England, no more, no less. The English trade custom demands this and will not pay for any overweight, while underweight will cause no end of trouble. Various boxes have been made with grooves in the wood and with slats nailed on so as to secure air circulation between the boxes when cold stored.

For export to South America and other warm climes tin cans carefully soldered and packed in boxes with rice shells or dry saw dust are the best.

Wooden packages should be kept in a clean, dry place, a damp storeroom may cause mouldy tubs.

PREPARING THE PACKAGE.

Stone and glass jars as well as tin cans need of course only to be *clean* in a "dairyological," not to say bacteriological sense, but wooden packages requires more than this. Tubs and pails strong enough to stand it should be scrubbed inside with hot water or steamed and then soaked for 12 hours with cold water or weak brine and again scrubbed with fresh cold water or brine just before using. The water should be as pure as that used for washing the butter. The outside should be kept as dry as possible. If thoroughly steamed and then rubbed with salt it is said that 2 hours soaking is all sufficient.

Parchment paper lining is getting quite popular. In tubs only the bottom and side should be lined and the very best paper soaked in strong brine for a few hours should be used, and the tub should always be prepared as described above.

PACKING.



(Fig. 62a.)

Packing should be done while the butter is pliable and by pressing with a ladle or (in tubs) ramming with a "packer" (one kind may be seen in Fig. 60). Too much should not be put in the tubs—never more than 10 to 15 lbs. at a time, and each lot should be carefully rammed so as to get it solid and leave no air spaces. To do this, use the packer with a slight slant from the center to the sides of the tub. This is all important, not only in order to exclude the air (which reduces the keeping quality) but also because it is foolish to

pack four to five pounds less in a tub than it will hold, as was done in the tub shown in Fig. 62a. The New York *Produce Review* kindly sent me this illustration from an article




(Fig. 62b.)

on packing, one of the many interesting ones published by that enterprising paper. In Fig. 62b is shown a tub packed rather better, though hardly what I would call *perfectly*. Some use a wire to cut it with. If you want to smooth it do it by pressing with the ladle, not by rubbing, which makes the butter greasy. Line bottom and sides with good parchment paper, leaving an even edge of about one inch, to be folded over the top. Put a cloth circle on the top, dampen it with brine and sprinkle a thin layer of salt on top of it. Fasten the cover with 3 or 4 equi-distant tinstraps, using half-inch wire nails. Stencil uniformly without getting finger marks on the tub, weigh the tub before filling and after, marking the gross and tare in pencil. Reweigh the day of shipping and you

may save yourself from being unjust to your commission man. If the butter has not too much water, if the tub has been properly soaked, if you allow $\frac{1}{4}$ lb. to $\frac{1}{2}$ lb. per 60 lb tub for shrinkage, and if your scales are correct, you need not fear any deductions from your weights by honest commission men. In this connection it must be said that scales, especially platform scales, are liable to get out of order, brine will soon rust them; hence the one shown in Fig. 63 is preferable for weighing butter.

Ram the butter so as to more than fill the tub and strike it off level with the edge.

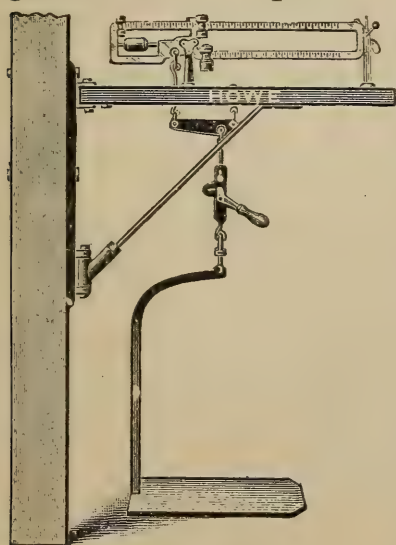

(Fig. 63.)

may save yourself from being unjust to your commission man. If the butter has not too much water, if the tub has been properly soaked, if you allow $\frac{1}{4}$ lb. to $\frac{1}{2}$ lb. per 60 lb tub for shrinkage, and if your scales are correct, you need not fear any deductions from your weights by honest commission men. In this connection it must be said that scales, especially platform scales, are liable to get out of order, brine will soon rust them; hence the one shown in Fig. 63 is preferable for weighing butter.

SHIPPING AND MARKETING.

In the open market dealers prefer to have no private stencil or trade mark on the package, and especially do they object to the name and address. If you use these and your butter is not up to the standard, leave them off, and in any case always notify your receiver if for some reason a shipment or part of one is not as good as usual.

Too much stress cannot be laid on keeping the packages clean and protected from heat and dust in hauling to market or to the railway, and while waiting for the train. Too often have I seen tubs exposed for hours to the sun on the station platform, and if the creamery man cannot attend to it himself he ought to arrange with the agent to have the tubs protected and not soiled in loading.

Never contract your butter for a whole year at the quotations of a certain market. Whenever a large number of creameries do that, it is a temptation for the buyer to manipulate that market. Indeed, some of the Boards of Trade become more or less of a farce, when less than one-tenth of the butter from the members is put up and sold on the open board. If you sell at all, sell at a fixed price.

Never ship a "sample shipment to an unknown house" which offers to buy it at a cent or two above the market. If they do not fleece you the first time, they will do so when they get a large shipment. They often send circulars giving well-known names as references without authority.

Never try to pit two commission houses in the same city against each other by dividing a shipment, especially if you use your own stencil.

If you have a good commission house, stick to it so as to give it a chance to work up a trade on your butter.

Always insist on a prompt account of sale and remittance. The lack of this shows either lack of good business system, or a desire to run their business with your money.

Instead of getting offended when your commission house draws your attention to some fault in your butter, insist on it doing so; follow its advice closely as to the amount and quality of salt, color and style of package.

Selling direct to consumers is another matter, and is to be advised, as a rule, only in case the producer can comfortably deliver it once a week from his own wagon. The price should then be fixed, say for each month, or at least for the

six summer and the six winter months. To contract at a uniform price for the year, is not advisable, as in most cases the consumer will be willing enough to take the regular quantity in winter; but in summer, when he can buy it elsewhere for six to eight cents less, there is danger of trouble. In this case it is also wise to remember that "short accounts make long friendships," and make the collections regularly at least once a month and better once a week.

To sell direct to consumers, who live at a distance, is less satisfactory, as there often is occasion for misunderstanding; yet it can be done in exceptional cases with great profit, and for this kind of trade some of the different fancy packages may be used with advantage, though as a general proposition we cannot endorse any *return* package. But, in selling direct it is well to remember the extra cost, trouble and risk incurred, and in order to do as well as selling the whole make for cash to a dealer or through a commission house, it is certainly necessary to get, at least five cents more a pound.

CHAPTER IX.

ICE HOUSE AND REFRIGERATORS.

EVERYBODY OUGHT TO PUT UP ICE.

Even though ice is not as important in these days of separators, no buttermaker, be it on the farm or in the creamery, ought to be without a stock of ice or snow, so as to have complete control of temperature. Nor can the value of ice to the farmer's wife and family be overestimated, and whenever the winter is cold enough it is not a very great job for a few neighbors to join together and scoop out a pond if no river or lake is within reasonable distance. Even if such pond ice is not fit to use in cream directly, it will cool as well as the best, and if there is plenty of snow, and it is packed solid by wetting it a little and trampling it, about the same cooling effect can be obtained from a cubic foot as from ice.

It makes a difference only of about 5 per cent whether ice is gathered in thawing or freezing weather, but in stacking it is important to pack as solid as possible and fill the spaces with crushed ice.

THE ICE HOUSE.

The cost of an ice house need not prevent any one from having one. I have preserved ice by stacking it on a two-foot layer of sawdust and covering it in the same manner. I even left a small chamber in the center of the pile, the entrance being protected by two feet of straw packed between boards. There I could keep meat fresh for a week or more. Such an ice vault should not be opened more than two or three times a week, as otherwise the ice will melt too fast.

This is not the best way and houses may be built to suit each ones purse. In this, as in other matters, co-operation between three or four neighbors is the thing.

If the floor is absolutely tight and laid on a layer of sawdust, that is the best, but it will do very well to pile it on a thick layer of sawdust or even straw provided good drainage is secured. (Not necessarily direct drainage, but for instance, a layer of gravel.

The walls (both inner and outer) should, to get the best result, be made of matched boards and be two feet apart and this space should be filled with closely packed insulating material. The inner wall *may* be dispensed with and the insulating done as the ice is piled up, but this will waste more material.

Such a wall filled with *dry* sawdust or chaff will stop the air circulation even better than a whole lot of board and paper partitions and will, as a rule, be much cheaper in the country. A series of air spaces allows circulation in each and unless there are many of them the insulation will not be perfect, but they are cleaner and not so apt to get damp and musty as the solid sawdust or chaff which every few years must be taken out and dried.

A combination of the two systems might possibly be the best; say 12 or 18 inches solid in the center and an inch air space on either side.

The floor should slant toward the center so that the ice will lean that way and not, in melting, press on the walls. It is enough to cover the ice with a foot or so of the insulating material, but above this free circulation of the air should be allowed. If exposed to the sun it is a good thing to have a sort of tent roof above the regular roof so as to provide shade.

The value of various insulating material may be ranked in the following order. Cotton, husks of barley, wheat or oats, leaves, chaff, husks of rice, wheat straw, sawdust and peat. All losing value if not dry.

Under the ice in the bottom chaff, leaves and husks should not be used, as when damp, they easily ferment and develop heat.

As to the unavoidable loss during the year by melting in the ice house, it is estimated that in December it amounts to about 45 lbs for every square foot of the inside surface and hence the percentage of loss is much greater in a small ice house than in a larger one.

Refrigerating machines have been hinted at before and where a new creamery is built and where ice can not be made virtually at the door of the creamery, a refrigerator machine seems to me to be advisable, but we must be prepared to spend at least \$1,000 on it, as a too small machine is a delusion and a snare. We should have a brine tank in the cold storage room to hold the temperature during the night. There are various systems in the market, but for creamery use it seems the direct expansion ammonia system is the best, provided the coiling is done by experts so that there shall be no leakage.

Liquid air has not yet been made practicable, but it has great possibilities.

REFRIGERATION.

Small double boxes may be constructed at home with from 2 to 4 inches thickness of felting or 6 inches sawdust will do nicely, though refrigerators can now be bought at reasonable prices.

Refrigerating rooms, like good ice houses, may be built either way, but, as a rule, the air-space system is the simpler and is effective enough if there are at least five air spaces, and if all circulation of air from wall to ceiling and floor and from wall to wall is effectually stopped. Careless builders often make the partition a delusion and a snare by knocking holes in the paper when putting it up. The studs are placed at a distance that will allow the paper to lap over an inch or so and a 1 inch thick strip is then nailed firmly over the seam on the studs, the next paper put on, and so on until from 5 to 7 air spaces are built up. The inner and outer walls are made of matched boarding. The paper should be close and air-tight and should not swell. Prof. King recommends the 3-ply giant paper made by the Standard Paper Company, this is acid proof. The wood used should not have a strong smell, like pine.

The biggest danger is at the joining of walls, ceiling and floor. It is safest to fill the lower six inches of the air spaces with mineral wool, as it must be remembered that a leakage of air at the bottom is far more detrimental than at the top. The floor should be insulated as carefully as the sides and should be water tight.

The door is a difficult problem and requires a good carpenter to construct it so as to fit tight and yet not swell and

stick too hard. It is always better to have a sort of entry room, or at least two doors so far apart that one may be shut before the other opens.

It will be seen that even a refrigerator may be constructed cheaply, but in creameries it is well to employ an expert and secure perfection, as the danger from mould, not to speak of waste of ice, is considerable.

Suffice it here to draw attention to a few more points. The ice shelve or chamber or the refrigerator coils should be placed near the ceiling and insulated so that no moisture will condense underneath and drop on the floor, but be condensed on the ice and be removed with the water from the ice tray through a pipe with a water lock.

Circulation should be insured by a partition or false wall and ceiling, which if there is only one ice shelve should extend nearly to the floor on one side and to the opposite end of the ceiling at the other side. If there is an ice shelve at both sides it should nearly reach the floor on either side and extend from both to nearly the center of the ceiling. In the latter case the hot air will pass up in the center over the ice which dries and purifies it, letting the cold air drop down at both ends of the room.

The very best insulation, if we can afford it, is secured by filling space with mineral wool. Prof. Robertson says that 100 lbs. will pack about 20 square feet of space six inches wide.

CHAPTER X.

PASTEURIZATION FOR BUTTERMAKING.

NOT THE SAME AS FOR CITY USE.

When pasteurizing for buttermaking it is not necessary to keep the milk or cream at the temperature of 160 deg. for twenty, or even five minutes, unless indeed it be intended to hold the cream for a day or more or ship it a long distance before setting the cream for ripening, in which case the keeping of it hot for a longer period may be desirable.

And this is easily explained. If the heated and recooled cream is inoculated *at once*, with a good "starter" these good flavors bacteria (or ferments) get a start of the few possible bad germs that may have survived the short heating. In any case it must be remembered that only "*sterilization*" or heating to 215 deg. can give us absolute security and that this temperature is incompatible with fine butter.

On a large scale, in a creamery, the short time heating, which allows the use of a continuous heater, is the only practical one.

ON THE DAIRY FARM.


For buttermaking on the dairy farm I can hardly imagine any conditions that would make pasteurization desirable as a regular practice for buttermaking, and yet there might be cases (where weeds may taint the milk), when it should be tried as a remedy. Or when very small quantities of cream make churning once a week desirable, pasteurization may be resorted to. Even so may it be used as a temporary relief until you discover the cause of "slimy" milk, which is generally due to lack of cleanliness somewhere.

It is true pasteurization will *not* cure milk of a very strong, leeky flavor, but it will reduce that and remove many minor taints.

In the gathered cream system where there is no ice or very cold water at command, or where it is desired to keep the cream for gathering only twice a week. I have a good deal of faith in the future application of this system of preservation.

But once and for all understand it that pasteurization is no panacea for all evils nor any excuse for lack of cleanliness. Indeed, it requires a high standard of cleanliness if it is not to turn out a delusion and a snare.

Any *clean* tin can, free from rust, preferably of a similar shape of the shot-gun can, will do. A stirrer made of

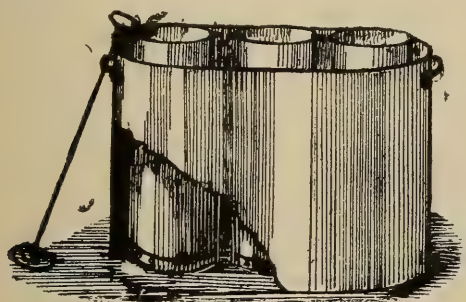

(Fig. 64.)

smooth, clean hardwood, but preferable—a tinned iron rod with a little dasher, and a boiler of suitable size completes the outfit required. Fig. 64 shows such a boiler for three regular shot-gun cans with the stirrer to the left.

Place the boiler over the fire and when the water is about 120 deg. set the can with the cream in the water and stir continuously until the cream is 160 deg., remove the cream can, reduce the temperature of the water in the boiler to 165 or 170 (if warmer) by adding cold water, replace the cream can with the cover on and keep the boiler where the water will not drop below 160 degs. Another way to maintain the temperature is to have an insulated box as mentioned in the chapter about starters and to place the cream can there. Keep the temperature for 20 or 30 minutes and remove the can for cooling, or, if you want to make butter soon, cool it at once to 70 or 75 deg. and add the starter.

A quick intensive cooling is desirable if cooked flavor is to be avoided and for this reason we must either have something like the Champion or Starr cooler, or else have a can or tub with ice water in which to plunge the cream can and cool quickly to 40 or below by stirring the cream with one hand and the water with the other.


If this temperature can not be obtained it may be safer to heat to 150 only in order to avoid a "cooked" flavor, and as long as we can cool quickly to 60 deg. the keeping quality of

the cream will be greatly increased and this is commended to patrons of gathered separator cream creameries who have no ice.

IN THE CREAMERIES.

The first pasteurizing heaters used were those illustrated in Fig. 22, and those interested in a description of the various apparatus up to 1895 will find it in my pamphlet on "Pasteurization and Milk Preservation." (Since then the "Potts" pasteurizer for both heating and cooling has appeared on the market, and it is to be recommended as the best up-to-date for milk and cream *for city use*). I have before mentioned the continuous heaters of Barber Mfg. Co. ("Hill," Fig. 24) and the DeLaval Co. There are several new constructions in Europe, none of which seem great improvement on those of 1895, of which the Reid is fairly representative. (Fig. 65).

There are two ways of doing the work, either to heat the new milk and run it hot through the Separator, or to heat the cream and the skim milk separately as they come from the separator.

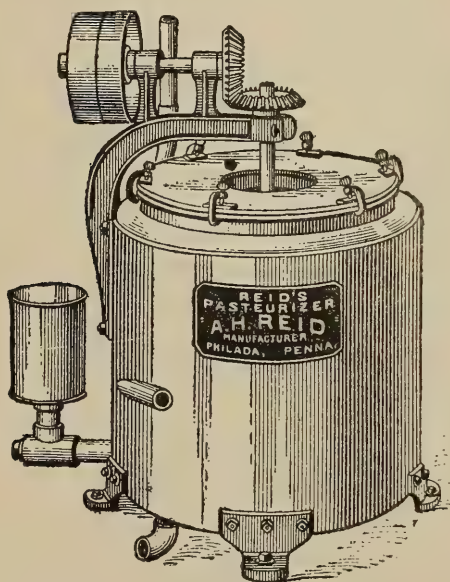

(Fig. 65.)

The first course has the advantage of requiring a single heater for the work, and of increasing the efficiency in skimming of hollow bowl separators, but the latter allows us to heat the skim milk (which, as a rule is not cooled, and hence requires a high-

er temperature) to a higher degree than the cream.

Practical experiences have shown that the milk at our creameries is seldom received in a good enough condition to pasteurize and yet the cream may stand it. Thus I have found that when the new milk showed an acidity of 14 cc by Mann's Test, the cream would only show 9 or 10 cc, partly on account of the greater proportion of fat and partly, I presume, because


many acid producing bacteria are sent to the wall of the separator in the slime.

For these reasons I consider that it is safer—at least, until far better milk is delivered—to pasteurize the cream by itself.

Prof. Farrington draws the line of 0.2 per cent acidity, or about 11 cc by Mann's Test for pasteurizing for commercial purposes, and I feel inclined to draw a line not far from that even for buttermaking. It is a fact to be remembered that all heaters hitherto used will coat (and thus lose efficiency) just in proportion to the acidity of the milk and that the cooked flavor also increases with the original acidity.

Nevertheless the hot skimming might be used as a club compelling the creameries to force the patrons to deliver *sweeter* milk, and as this really also means *cleaner* milk, the advantage is obvious.

Whatever system is used, a quick and *intense cooling* is absolutely necessary if a cooked flavor is to be avoided. For this purpose, the "Star," (Fig. 2), the "DeLaval" or the

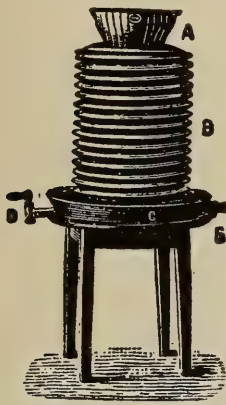


(Fig. 66.)

"Smith" Cooler (Fig. 66), are all efficient and good. And so are the direct expansion coils or brine coolers, made by A. H. Barber.

But all these coolers require a considerable drop, and if this is to be avoided, I know of no better coolers than the improved "Baer," made by the Barber Co., shown in Fig. 27, and set up in Fig. 67, in connection with a centrifugal heater, suggested and used by me, but now superseded by the Hill heater (Fig. 24). These coolers may be made any length and three 10 feet lengths will only require a total drop of 1 foot, and the first heat can be taken out by using the condensing water from the refrigerator (say at about 78 or 80 deg.) in the first length, ordinary water (say 50 to 55 deg.) in the next, and, if desired, to cool very low *brine* in the last length which should then be made of copper.

In the matter of cooling for practical buttermaking, I am decidedly opposed to the bacteriologists, who from a (justifiable) scientific standpoint, insist on cooling in a closed vessel like the "Russell" or "Potts" pasteurizer.

I have seen too great improvement in the cream after this combined cooling and aeration to give it up, and must insist on recommending either of the above-mentioned or similar coolers. It goes without saying that the room must be clean and the air pure where they are used.

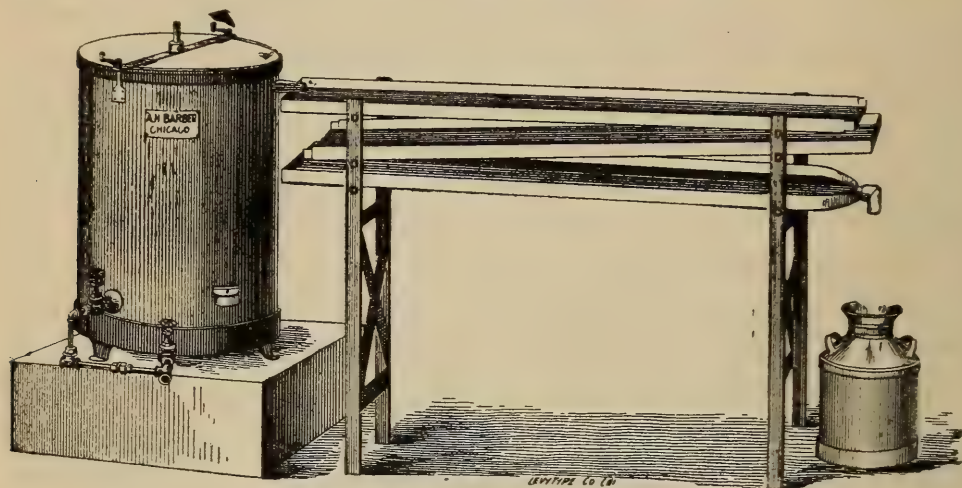

(Fig. 67.)

THE BODY OF PASTEURIZED BUTTER.

It used to be deemed a necessity to chill the pasteurized cream first and then reheat it for ripening, but I have found equally good results by simply cooling to ripening temperature (70 to 75 deg., and then adding the starter) as long as this is done quickly.

But when ripe, or nearly so, it is absolutely necessary to chill it and keep it for at least a couple of hours at a temperature between 44 and 48 deg., the latter being not too cold to start churning if the cream is rich. If this is done the *body of pasteurized butter will be fully equal to the unpasteurized from the same cream.* Indeed, in some experiments made in Kansas it scored a little higher, and the trouble of the makers who have not got good body has been that they did not understand this or else did not have the needed control of the temperature.

WHAT TEMPERATURE TO USE IN HEATING.

Personally I have never tried to heat to more than 155 or 165 deg., and once when I had 170 deg. I got a cooked flavor in the butter, which, however, disappeared a week later. But that was in experimenting with hauling hot cream, it had been allowed to cool partially (to 138 or 140 deg.) in the

jacketed cans for 2 to 3 hours, while skimming and hauling it the 13 miles to the central creamery where it was cooled at once.

Recent reports of Danish experiments convince me that the higher temperature cannot have been the cause.

Hitherto the Danish creameries, 90 per cent of which pasteurize, have kept within the limit of 170 deg., but in order to check tuberculosis a law was enacted in June, 1899, that all skim milk and buttermilk not used for cheese, should be pasteurized and the temperature of 185 deg. was deemed necessary for the continuous heaters.

Before passing the law experiments were made by the government expert with heating the cream (out of the same lot) to 167 and 185 deg. Out of nineteen cases, the judges found the butter from the cream heated to 185 deg. better in eleven, equal in six, and poorer in three, and though the variation was but small, the high heat showed the best keeping quality.

Other tests were made comparing 167 with 190 deg. Here 9 were better, 4 equal and 6 poorer from the high temperature, but in the second judging 11 were better, 6 equal and 2 poorer. The cooked flavor was observable at first, but disappeared in a few days, but great stress is laid upon *quick* cooling.

Do I advise pasteurizing for our creamery butter? For export, YES, most emphatically; for home trade, No, not if we look to the immediate return. The extra expense and trouble and the slightly reduced yield (which may be estimated to increase the cost of making from $\frac{1}{2}$ to 1 cent per pound) does not pay in a market that does not seem to appreciate the value of *uniformity* to that extent.

But if we look to the future general good of the American Dairy Industry, I have to say yes here also, and hope for its introduction.

CHAPTER XI.

RETURNING THE SKIM MILK.

SKIM MILK WEIGHER.

Various devices, all more or less complicated, have been patented by which the patron receives a check at the weigh can and this allows him to take his share only of the skim milk. Several worked quite satisfactorily, but have been given up as too complicated and none have, as yet, stood the test of years of experience. One of the simplest in construction is the "Hill" (made by the Barber Mfg. Co.), which does not weigh, but measures the milk. I should prefer to hire a boy or girl to stand by a weigh can and scale. No doubt the problem will be, even if it is not already solved in some way, and the just division of skim milk provided, as this question causes more friction than anything else. It must be left to each creamery whether to keep a patent check weigher in order and clean or hire to boy to weigh the milk. *The skim milk tank and weigher should be cleaned every day as carefully as the receiving vat.*

HEATING SKIM MILK.

In Europe the skim milk is heated in the more expensive apparatus described elsewhere, but the comparatively few creameries in the states, who heat the skim milk, use steam direct from the boiler or exhaust.

A simple device for the latter is to place a can in the skim milk vat and let the skim milk be pumped into the can and overflow while the exhaust steam heats it in the can. Various other more or less complicated devices are used.

Heating this way cannot be recommended. Even with direct steam there is a dilution of about seven per cent, and with exhaust there must be more. However, it is as much as

we can expect to do as long as the farmers do not seem to realize the full value of skim milk.

In heating a vat of milk or water with direct steam, the noise may be reduced and a current created by applying the steam as shown in Fig. 69. Have the blacksmith close up one end of a short nipple (N), so as to leave only a small opening (s), insert this in a common T and apply steam at (S); this will suck the milk or water from (m), and force it out at (e), creating a lively current in the vat.



(Fig. 69.)

But whatever heaters are used, those continuous heaters general in Europe or the direct steam, experience has taught us that the milk is liable to foam overflowing the tank and preventing the filling of the cans in a satisfactory manner.

The very latest device to overcome this trouble, recommended by Dairy Expert Boeggild, of Denmark, is that patented by C. Mikkelsen, shown in Fig. 68. The


skim milk vat is made of heavy tinned steel plates with angle iron, round the top edge. This allows the clamping of the cover

firmly and tightly.

In the cover is an opening into which fits the half cylinder which is provided with two dashers revolving on a shaft driven

with a cord pulley. The skim milk enters the vat through a closed pipe and the foam rises against the cover, where it is caught by the dashers and thrown against the cylinder, thus releasing the air which escapes through the ventilating pipe.

To secure full protection against tuberculosis, the milk should be heated to at least 185 deg. This is now compulsory

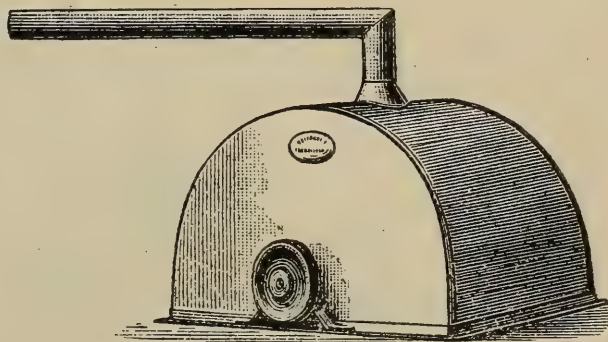

(Fig. 68.)

in the Danish creameries. A test has been invented by Dr. Storch, by which the authorities can quickly and easily determine whether this has been done. The residue in the separator must also be burned.

CHAPTER XII.

RUNNING BOILERS, ENGINES AND SEPARATORS.


Dairy schools, dairy papers and books are all very weak on these points, and we greatly need a manual written in a clear style. There are handbooks on engines and boilers, but none popular enough written with special reference to creameries.

I do not feel competent to fill this want. It would take a 300-page book to treat the subject exhaustively, and I know of only one man who could do it, and that is Mr. Frank Baer, with the De Laval Separator Co., to whom all buttermakers, including the "pen and ink" one owe many pointers.

I just give a few hints.

BOILERS.

Always have the boiler of nearly double the capacity of the engine and do not grudge at a few dollars extra, but get the

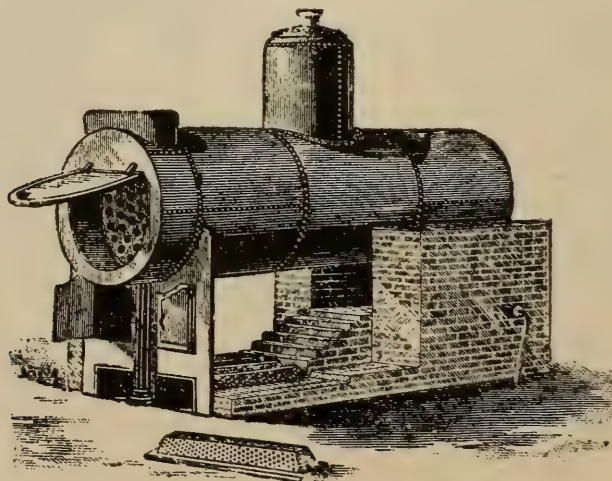

(Fig. 70.)


best. For creameries the old standby "the built-in tubular," like Fig. 70 is the best. If the smokestack is built in front the

top should be insulated, but if it is desired to have the smokestack at the other end, it costs but little more to lead the smoke back over the top, and this will act as an effective covering. In small skim stations and dairies the tubular upright (Fig. 71) is the one to choose, though it is much more difficult to keep clean.

Never buy a second-hand boiler without having it examined by an expert.

Before starting a boiler examine the safety valve and steam gauge (which should be at zero when the water is cold), the try cocks and the glass gauge.

Never pump cold water into a hot boiler or blow it off under pressure. If the water should be low (which it never ought to be) find out if it is below the flues, and then bank or cover the fire with ashes or fresh coal if no ashes are at hand, or draw at once. Don't touch safety or any other valves, and under no circumstance turn on the feed until the boiler is partly cooled.

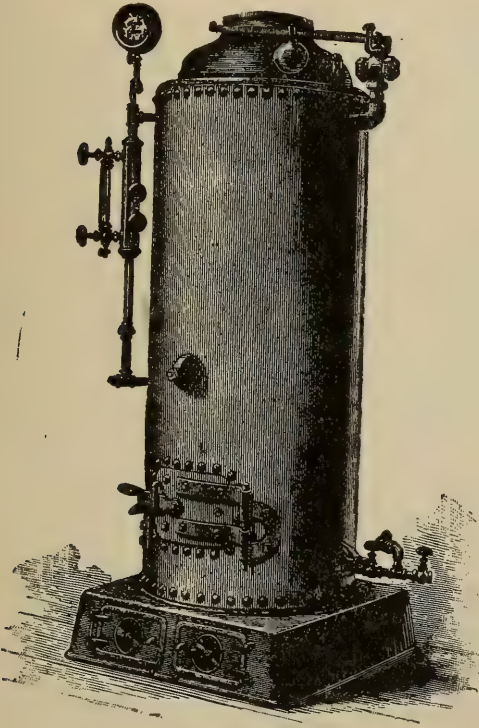

(Fig. 71.)

hurt the boiler as many compounds do.

To keep it clean let out about 2 inches of water every morning before starting the fire and wash out at least once a month. If flues gather scale scrape off. It is said that $\frac{1}{8}$ inch loses 15 per cent and $\frac{1}{2}$ -inch 60 per cent of the fuel value.

Leaks should be stopped at once to prevent corrosion even so leaking valves where the drip hits the boiler. As soon as blisters appear, examine carefully and have them patched or trimmed. All parts of the boiler exposed to the fire should be

The water having been analyzed, consult an expert as to boiler compound, but potatoes or rice will, as a rule, be good enough, and not

kept perfectly clean and flues well swept, especially where wood or soft coal is used.

Mr. Krebs says in the "Dairy Messenger:" "In firing with fine coal a thickness of three or four inches is ample; when greater the combustion is imperfect, wasting fuel and preventing the full power of the boiler from being developed. A thin fire, sparing and frequently renewed, is attended in every way by the best results. The fuel should be heaviest at the sides, they having a greater supply of air, on account of the spaces unavoidably left between the fuel and the walls. Do not fire with large lumps. Boilers are often injured by unequal expansion and contraction, caused by a strong fire on one side while there is a draft of cold air through an open door on the other.

"If your boiler steams too fast, close your dampers and shut off the draft. Never throw open your fire doors when it can be avoided nor keep them open longer than is absolutely necessary. It is injurious to the boiler and wasteful of fuel."


(It is a good plan to arrange the grate door so that when it is open the damper is partly closed).

"For boiler feed a small power pump, driven by belt from the shafting is the best. It consumes less steam than a direct-acting steam pump, is cheaper and more reliable. It should be fitted so that it can be worked by hand also.

"Injectors and inspirators are frequently used for feeding boilers. They have the advantage that they are cheap, and that they impart some heat to cold water where this is used for feed. They cannot handle warm water, and sometimes get out of order and will not feed, and as this is often caused by slight derangements of parts which it takes an expert to re-adjust, they often cause trouble. I for my part have had more trouble with half a dozen inspirators and injectors than with dozens of feed pumps, and have a positive ill-feeling against them. If you want to hear about their virtues you had better go to some agent for these goods; they will tell you a different story. It is nevertheless a handy instrument but a little tricky, and it is always wise to have a pump in reserve should the injector prove balky.

"The *water* used for the boiler should be clear, pure and soft, as free from lime, magnesia or other foreign matter as

possible. If it is taken from a stream that is apt to be muddy,

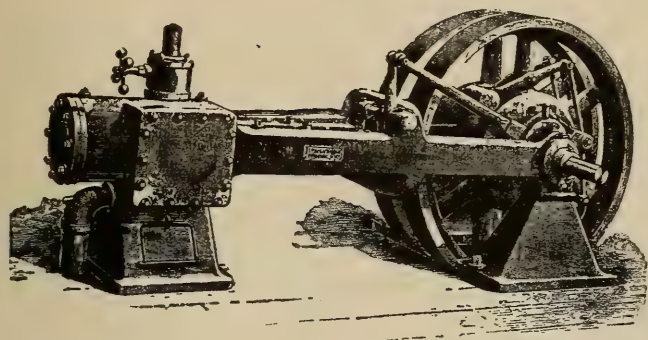

(Fig. 72.)

make a little basin large enough to give the water a chance to settle. It will save its cost over and over again. Be most careful not to allow any swill or sour drainage to mix

with the water you use. It will pit the iron and eat out the tubes in a short time. This is also sometimes the case with water from other sources, such as drainage from mines and even from apparently perfect springs.”

ENGINES.

It is also economy to have the engine at least 25 per cent larger than actually needed. In choosing, simplicity, durability and steadiness should be considered, and a good governor is very important. Again I quote Mr. Krebs, who recommends one made by the Straight Line Engine Co., Syracuse, N. Y., (Fig. 72):

“The piston in an engine should be an easy fit, so as to move with little friction, and at the same time it should be steam tight.

“If the back cylinder cover is removed, little steam should escape if you place the engine on the front center, at which point the valve ought to admit steam to that end. Again place the engine on three-fourth stroke and turn on steam; here the slide valve ought to close both ports, and if the valve is tight no steam will escape into the cylinder or from the exhaust pipe. Should steam escape in quantities your engine needs repairs, in which case you will have to get a trained mechanic to face and bed your slide-valve or refit the piston, as untrained people generally make bad, worse.

“The escape of steam in the positions mentioned might also be caused by the eccentric working loose or having shifted. The angle of advance if the eccentric for ordinary slide valves should be such as to open the steam-port when the

piston is at the end of the stroke, and the length of the valve-rod should be adjusted to give the valve equal opening at both ends."


Oil sufficiently, but do not slop it on the floor. Wipe the engine when stopping for the day and keep it bright and clean. Take a pride in it!

Before starting see that the governor is in good order, the belt not too tight nor too slack, that the engine is level and firmly bolted and that all boxes and shafting as well as pins and screws are snug and tight, that the exhaust is open and the crank not on the dead center, and turn on steam slowly. Watch bearings closely in the beginning, and if a hot-box should develop and plenty of oil does not relieve it, stop and loosen it a little and try to finish your work. You may have to stop long enough to cool and polish before starting. If there is a grease cup on the crank and it is kept filled, it will seldom heat. A little plumbago added to the oil is also claimed to be a good thing for a hot-box.

Knocking or hammering may also be due to the piston touching the heads, to the fly-wheel being loose, to loose keys or slack nuts. Worn bearings may be filed on the edges so as to fit.

Always look over belts and everything in the afternoon, so as to be ready for the morning work. A leaky valve or union left to drip day after day is a "dead give away" of the maker as a careless one. Here as elsewhere, "a stitch in time saves nine."

Belts should be wide enough and long enough and pulleys large enough to allow them to pull without being too tight. They never work as well in a vertical as in a slanting, or better still, horizontal position. The lower side should be the pulling one. See Fig. 73. If they slip apply a little belt grease

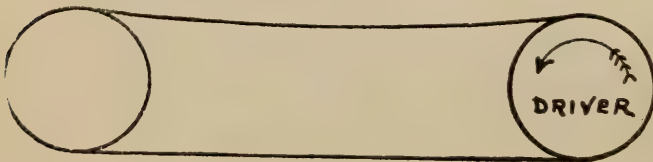

(Fig. 73)

(not too much), and keep them soft with a coat of it now and then. Only in emergency

should powdered rosin be used. Protect leather belts against moisture; if that is impossible use rubber.

A common fault in creameries is too light shafting. It is poor economy.

RUNNING THE SEPARATOR.

The separator, running at the high speed it does, is a delicate piece of machinery and requires more care than is usually given to it, which often does not exceed that given a chaff-cutter or threshing machine. For the hand separators, some of the following pointers for running power separators hold good.

See that your separator is level and *follow the directions of the manufacturer closely*. Before starting be sure that they are put together right, that in the "Alpha" the riglet plates are in the right order in the right bowl and the right bowl in the right frame.

Watch all parts liable to wear such as the bearings and the rubber, which should be renewed whenever it loses its elasticity. The treads in the bolts in the plate that holds down the rubber ring, should be watched as the loosening of this plate may cause an accident. In putting a new rubber ring in the upper bearing a little of it may get squeezed under the plate and this may cause the loosening of the screws.

See that all oil cups are filled with the very best oil and in good working order.

Don't forget to fill the bowl with water and to start slowly. Mr. Leighton, in the "Chicago Dairy Produce," from which some of these pointers are taken, says that not less than five minutes should be used, and that when several separators are to be started he prefers to put on all the belts and start the engine slowly.

While the ear may be a guide to a musical buttermaker in guessing within a thousand or so revolutions per minute, never neglect to use the speed indicator now and then.

If there is a stoppage in the milk supply, drive the last cream off with skim milk or water, and if it is going to last half an hour or so—stop. If only for a short time, keep up the speed and let a small stream of water run through.

Mr. L. also thinks that about 10 drops of oil per minute should be enough and that if it takes 30 or 40 drops, it is time to send the separator to the repair shop.

Sometimes the machine does not skim clean, and milk is found in the frame. (I have seen the latter, or rather smelt it stinking). Try the bowl with water without the cover on and hold a dry piece of paper in front of it and you will soon know if the bowl leaks, but it is by far more common that the bowl

is not set right, and hence a slight turn on the set screw below the lower spindle will raise or lower it.

At other times the supply is too small and consequently a richer cream is made, but more fat is left in the skim milk. Each machine should be run up to its capacity, and this should not be left to guess work.

Have two cans and let some one push them under the spouts, when you give the word with watch in hand, and pull them out after 1 or 2 minutes and weigh the cream and milk, then you *know* what you are doing. Mr. Baer tells me that more operators lose fat by running too little milk than any other cause.

TREMBLING MEANS LOSS OF BUTTERFAT.

As soon as the machine trembles, most operators think the bowl is out of balance, whereas in most cases it is caused by the bearings being worn and there can be no doubt that hundreds of creamery owners or managers incur heavy repair bills by not renewing the worn bearings in time. Duplicates should be kept even if the outlay appears heavy at first.

Carelessness in handling the bowl, especially in washing, will often bend the spindle a trifle and then the bearings will wear double quick. In hand separators curiosity often leads the owner to unscrew the spindle covering. In replacing it they do not get it to fit right and when screwing the cover on bend the spindle against the cog wheel.

But there is no end to the ways in which the operators get into trouble; most of them can be avoided by following directions of the manufacturers strictly, and not touching screws, one has no business with. When in trouble write direct to the manufacturer describing carefully all the symptoms.

Don't be tempted to buy a cheap oil "just as good," buy either the "Renowned engine oil," or the "De Laval separator oil."

CHAPTER XIII.

ORGANIZING CREAMERIES.

CO-OPERATIVE.

The co-operative creameries are the best wherever the members have learned to co-operate in the true sense of the word, have found the right man to manage, and trust him. The lack of these essentials is the cause of their downfall in, alas, too many cases.

But even at their best, a single co-operative just as a single individual creamery, will find it hard to compete with the large creamery companies which run from ten to one hundred creameries and have systematized the work of producing uniform butter at one end and seeking a market for it at the other. These creameries are in reality an extension of co-operation, and have relation to the single creamery similar to the latter relation to the private dairy.

Nevertheless I believe in the ultimate success of the co-operative system, though it may require modification of our present laws to allow it to embrace the combination of several co-operative creameries under one management.

As soon as it is found that the owners of at least 400 cows (within a distance of four to five miles of the intended creamery site) have agreed to join and deliver the milk, they should organize, and, while listening to what creamery promoters may have to say, make independent investigations.

As a rule they will be able to get good advice from the Agricultural College of their own state, and it is a good plan to send a committee of investigation to some successful co-operative creamery, but *never* should they accept the invitation to do so at the expense of a smooth-talking agent.

The preliminary expenses should be subscribed in cash by the would-be members, but, as a rule the needed capital can be

obtained from the local banker, securing it by joint notes or by the directors' individual notes and payable from a fund created by retaining a certain amount, generally five cents per 100 lbs. of milk, out of the dividend.

Suggestion for constitution and by-laws may be found in Profs. Farrington-Woll's book on Milk Testing, but it may be wise to consult a lawyer so as to be sure of the state laws. I shall only give the hint that unless the directors leave most of the details in management to the secretary or manager, it is by far the best not to have too many directors.

In rendering account to the patrons of any creamery it seems to me that the only right way is to give all possible information, say something like this:

STATEMENT FOR THE MONTH OF——, 1900.

Total milk received, ——lbs.; butterfat, ——lbs.;
butter made, ——lbs.; ——(Name);
delivered, —— lbs. of milk; testing, ——per cent,
or ——lbs. butterfat at ——cents per lb., \$——.

INDIVIDUAL CREAMERIES.

If co-operation is not desired to the extent of building and running the creamery, it is an easy matter to induce some individual or company to build one, provided you can agree to deliver the milk from 300 or 400 cows. In that case subscribe the cows and a cent or two per cow to pay for advertising in the dairy papers, and you will soon have propositions enough for a creamery. The milk should be paid according to test and the price fixed according to some market—New York or Elgin. The cost of making will vary from $2\frac{1}{2}$ to 5 cents, according to amount of milk delivered.

COMBINATION SYSTEM.

The trouble with the individual creamery is that no one can afford to put up a good brick building with cement floor, etc., and take the risk of patrons leaving. For this reason I am in favor of the farmers putting up at least the building and then letting it with or without machinery, if they don't want to run it themselves. The rent should depend on price paid for the milk and according to the quantity of milk delivered and be free if the average is less than 3,000 lbs.

A similar system obtains in Kansas and Nebraska, where large companies build and equip large central creameries, and then offer to put up skim stations all around for a certain sum. The farmers agree to sell their cream and pay for the skim station in that way, and if, after a certain time, they do not want to sell cream any more they own the building and may change it to a creamery.

GATHERED (SEPARATOR) CREAM CREAMERIES.

This system of co-operative creameries was, with few exceptions, the general before the advent of separators, and lately there has here and there been a tendency to return to it, adopting the hand separator on the farm.

One great factor in this tendency has been the poor condition in which the skim milk is returned from most of the separator creameries, but where the new milk is delivered in a good condition so as to allow the heating of the skim milk to 185 deg., the main objection falls to the ground, and take it all in all, I do believe I am safe in advocating the whole milk creamery wherever from 6,000 to 10,000 lbs of milk per day can be secured within a radius of 4 or 5 miles, and it is hauled every day all the year round.

Where the milk has to be hauled from 10 to 20 miles, where the farmers will deliver only every other or even every third day, the hand separator system is in its place, in spite of the much greater investment in say 100 hand separators over and above that of one or two power separators, (an investment about seven times as great requiring interest and amortization), in spite of the extra labor of running 100 machines instead of one or two. And there are other conditions that may make this system desirable, such as where most of the farmers lay stress on calf-raising—be it pure-bred dairy breeds or any kind of beef bred where milk is more or less a side issue.

But, in order to make this system a success, it is absolutely necessary that the cream be handled in the proper manner or the result will be a deteriorated product unless the cream is hauled every day, and in that case the saving in hauling is but small.

Ice or very cold water and its effective use in cooling the cream immediately as it comes from the separator to *40 degrees or below* is the demand I make, as, while the holding of the

cream at a temperature of 50 to 55 deg. delays its souring somewhat; it may also in the long run develop a bitter flavor.

If this perfect cooling is obtained it may be hauled only twice a week, if not, it is better to stop cooling at about 60 deg. and have the cream collected before it is too sour.

Or pasteurization (see Chapter X) may be adopted.

It takes but a very small cooler to cool the cream from a hand separator. As a rule it will be sufficient to collect the cream in a can of not more than 4 to 6 inches in diameter and place this can in a larger one filled with ice or with a flow of very cold water. In order to get some aeration of the cream I should prefer to conduct it from the separator to the cooling can in an open gutter some 3 or 4 feet long and if more effective cooling is desired this gutter might be placed in a water tight trough filled with ice.

The fresh batch of cream should be cooled before adding it to the previous one.

If in a larger dairy, effective use of water or ice is desired the more expensive coolers illustrated elsewhere are, of course the best.

There is no need of running the separator by hand if a tread power can be afforded and it is an advantage to get the bull exercised in that way.

The objection that by this system the small farmer who has only 2 or 3 cows can hardly afford to buy a separator, may be overcome by co-operation either by paying a neighbor for the use of his or by 3 or 4 farmers joining together and buying one. In Belgium there are co-operative dairies where the "creamery" (?) is provided with a hand separator and the patrons own from 1 to 3 cows each.

Protection of the cream from heat and dust in hauling is a necessity that goes without saying.

THE SKIM STATION SYSTEM.

There is another way in which the milk hauling may be reduced in sparsely populated districts and that is Skim Stations.

Here a centrally located factory (at best at a railroad center) is provided with the very best facilities for handling cream, such as Refrigerator Machine, etc., etc., and the cream is shipped from the Skim Stations located along the railroad

lines. This system is good wherever the stations are provided with facilities for cooling the cream properly, but where this is lacking the suggestions given for hand separator creameries should be followed. This system seems to grow in favor, and, where rightly managed, it is undoubtedly the best.

But whatever system is adopted, the milk producer and the creamery operator should remember that unless they cooperate and work for mutual interest, the system will—sooner or later—prove a failure.

CHAPTER XIV.

CREAMERY BUILDINGS.

SITE AND SURROUNDINGS.

In making a choice as to location, having made sure of the cows, the following points should be considered. (1.) A supply of good water. (2.) Possibility of proper drainage. (3.) Absence of disagreeable odors. (4.) Central location (central as to milk supply, not geographically) preferably at a junction of roads. (5.) Nearness to railroad station and ice supply.

A good substantial macadamized drive way and yard should slope from the building. If a dug well is to be used the greatest care should be taken in preventing surface water and drainage from getting into it; the only safe supply is an artesian well.

Too often the location is made a matter of compromise between patrons who try to get it near their own farms instead of finding the best place for the creamery.

THE BUILDING.

The *foundation* should be made of stone and started below the frostline. The floor should either be good smooth flagstones or hard, glazed bricks, both laid in cement, or a good concrete foundation for a Portland cement floor. A poor cement floor is a delusion and a snare. Wooden floors should

be made of 2-in Georgia pine either beveled and corked like a ship's deck, or matched and leaded. Soak with hot linseed (boiled) oil before putting in use. The walls of the best modern creameries are made of brick, preferably hollow brick, but in any case with $\frac{1}{2}$ -inch air space in the center. The inside walls should be finished with cement plaster or some of the patent waterproof plasters. If of wood, I prefer inside lining of oiled Georgia pine up and down without any bead and at least two air spaces lined with good paper.


The windows should, as much as possible, be on the north side and provided with screens, venetian blinds and in the north, with storm sashes.

The roof should have a steep pitch and is best made of slate, but shingles boiled in a copperas solution will do. Tin roofs are alright for the boiler room, but too warm for the creamery proper, and if used, should be painted white. The ceilings should be double with air space. The smoke stack should be made of brick and rather be 10 feet too high than, as they generally are, 20 feet too low.

As to construction for small creameries where one man has to attend to boiler and engine, separators or churns, as well as to receive the milk, the one level system is the best.

The churn floor should be lowered enough to run the cream from the vats into the churn.

Unless one has a self-lifting heater a pump must be used, and if so, the best one is the Danish, Fig. 74. Similar ones are sold here, such as the "Ideal," by the Creamery Package Mfg. Co., Chicago, and they are comparatively easy to clean. Of pitcher pumps I have seen some made to order for a large creamery company that could be taken completely apart and cleaned.

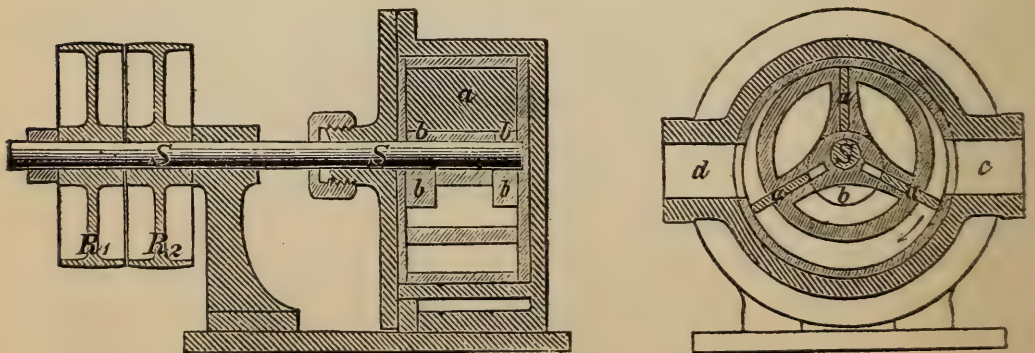

(Fig. 74.)


The pump is a dangerous thing in a creamery, and hence, where the location allows it and the creamery is large enough to employ a special milk receiver, I prefer the drop system, which allows the milk to run from weigh can to receiving vat, then to heater and separator and the cream from separator to cream vat and then to the churn.

The latter steps no one can object to, and until some new plan like the one of elevating the cream vats (see Fig. 28) is evolved, it is better to have extra steps than pumps and pipes.

It would be absurd to attempt to prescribe any special plan, if the prospective buttermaker is engaged it is well to consult him, but certain general rules should be observed, such as having the ice house (if any), refrigerator, churn, work room and cream room away from the boiler and engine room in the order named, the ice house being the farthest north. The engine should be in separator room, not in the boiler room. Also to have the coal room next to boiler and easily accessible to unload the wagons. To have the skim milk tank where it can be got at cleaning and where milk spilt in drawing will be drained and not soak into the ground and make a stink. To have all floors slant to the gutter and the drains provided with traps.

The creamery industry is no longer an experiment. Prosperity has followed in its footsteps, and land values have increased when it has been conducted rightly. Hence, the creamery should be looked upon as a public institution, like a court house, postoffice or school, and be built neatly, solidly and permanently, even at a greater expense. On the front cover is shown the facade of a Danish co-operative creamery. I am glad to note that in the last five years similar substantial creameries have been built in the west. May the good work go on. In many cases bricks will only increase the cost slightly, and though it may sound harsh, I must say that it would be a blessing if nine out of ten creameries burned down, provided proper brick buildings were substituted.

Various plans may be found in the catalogues of Dairy Supply houses, and when you order an outfit they will, as a rule, give advice and often modified plans free.

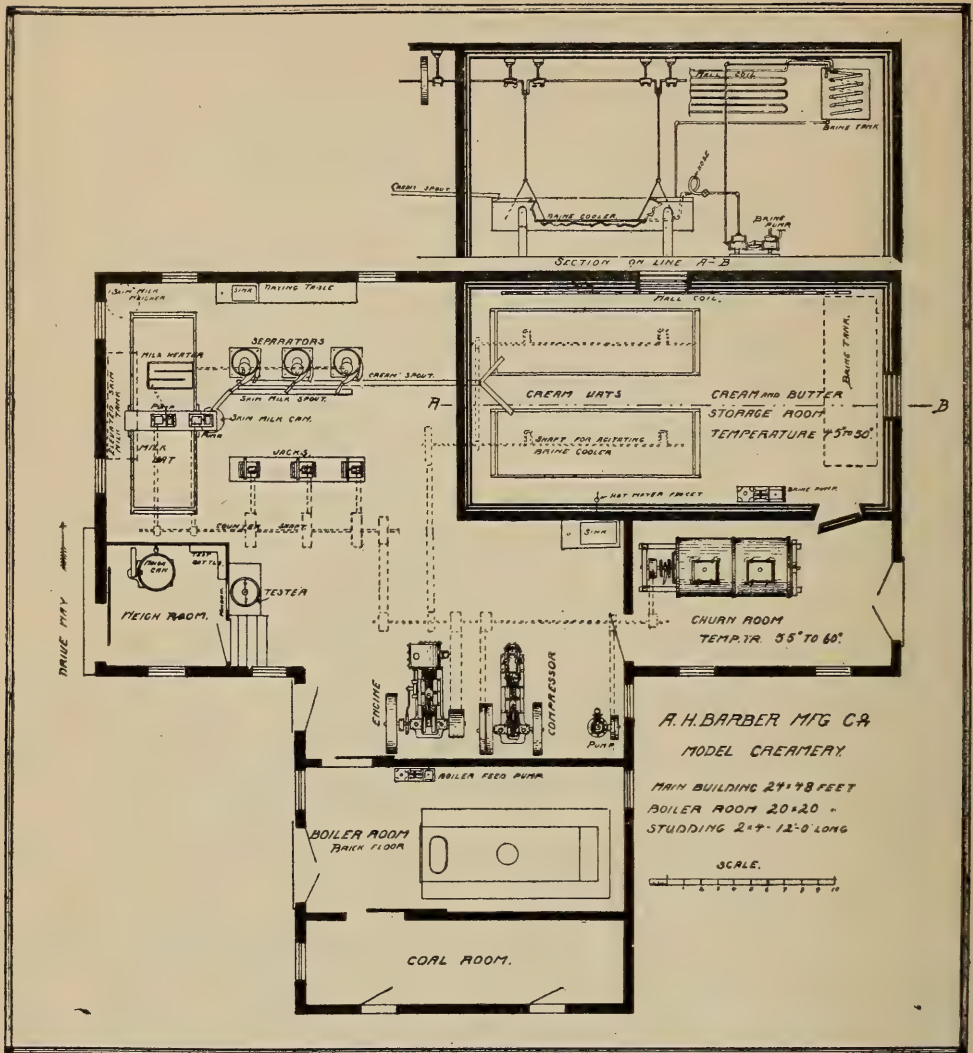

A. H. BARBER'S LATEST CREAMERY DESIGN.

One of the best, if not the best I have seen, is the latest designed by A. H. Barber & Co., which I illustrate. It is on the one floor plan, and the milk is pumped to the separators and the cream dipped into the churn, but it may be modified with elevations, if desired. The sectional cut above shows a brine coil (on the Gurler plan) for cooling as it is planned for using a refrigerator machine. Reduction of the illustration may make the use of a magnifying glass necessary to read the lettering.

PRIVATE DAIRY BUILDINGS.

Conditions and means are so varied on the farms that it is not practical to suggest any plans. If a special building is

desired most of the general rules laid down for creameries should be observed. It should be as near as possible to the stables as compatible with freedom from odors. If the hand separator is to be run for more than 30 or 40 minutes it will pay well to get a tread power and let the bull exercise. If a larger power, steam or gasoline, is desirable in or near the stables, the power may be transmitted quite a distance by wire ropes to the dairy building. Some stables and their surroundings are left that sweet and clean that a dairy room may be built in connection, but it is safer to have it at a distance and next to the ice house.

CHAPTER XV.

DAIRY EDUCATION.

No creamery buttermaker should be satisfied even if he has ten years' experience in a creamery until he has taken a creamery course in a dairy school. The greater his previous experience is, the more he will learn, and he must have at least a year's experience to get any good from the course at all. Indeed, most schools demand this.

Granting even that he may be a better maker than the teacher, that he is a smarter mechanic, that he knows more about running engines, separators and machinery generally, the fact remains that he will leave the school with a new view of his work, with a greater pride in his profession, and with a clearer eye to possible self-improvements. As for finishing his education, the very best makers are those who do not finish until their life's churning is done.

As to the dairy course, any farmer's boy or girl can get great good out of a short course, and no one who can possibly afford it, should neglect to take one. After all, however, it is but a small minority that can get to these schools, and though we have in the Farmers' Institutes and various conventions the means of bringing dairy education nearer to the farmers, I hope yet to see the modified "Belgium" system,

(urged by me for years in vain), adopted. By this system, any county or township that agrees to provide room, ice and milk, and where at least 10 students enroll, should secure a month's dairy schooling near home with a minimum of science and a maximum of practical suggestions how to do the best work under the present condition.

I consider the one week's instruction given by the English and Canadian traveling schools too short, and the same money spent on the plan I urge will reach more people and do more good than ten times the amount spent on the large central dairy schools.

The latter we must have—and it should be the Dairy *High* School, if you please—but we have now enough of that kind, such as Wisconsin, Iowa, Minnesota, Ohio, New York, etc., (and more will be provided, thus in Illinois), to educate the needed creamery buttermakers, whose salaries are too low as it is. What we need is to help the private dairymen and the *milk producers*, and these can best be reached by the proposed perambulating Dairy *Grammar* School.

The Dairy Press is an important link in dairy education, and no dairyman should be without several, first of all "*Hoard's Dairyman*," and creamerymen should have "*Chicago Dairy Produce*" and "*New York Produce Review*." A full list of dairy papers is given elsewhere and any of them will cheerfully send a sample copy.

The Dairy Division, U. S. Department of Agriculture, Washington, D. C., may at any time be applied to for advice and help and will send such bulletins as may assist you in your work free of charge or at a nominal cost.

But of all the means of education I rank highest school house meetings, held once a month or so, where neighbors may meet and exchange views. The "*Patron's Bulletin*" suggests several topics for discussion at such meetings. Such a "*club*" should own a library for reference, and I suggest as a "*starter*" Prof. Henry's "*Feeds and Feeding*," Prof. Russell's "*Dairy Bacteriology*," Profs. Farrington and Wolls "*Testing of Milk and Its Products*," which means an expenditure of only \$4.00.

CHAPTER XVI.

VARIOUS KINDS OF BUTTER.

MARKET GRADING OF BUTTER.

The Chicago market quotes butter as follows, and though their relative value varies a great deal, I add the prices quoted July 1, 1899.

Creameries "extra" (18 cents), "first" ($16\frac{1}{2}$ to 17 cents), "seconds" ($13\frac{1}{2}$ to 14 cents).

"*Dairies*" "extras" (15 to $15\frac{1}{2}$ cents), "first" (14c), "seconds," (13c).

"*Packing Stock*" (12 cents or a little more).

Ladles and Imitation not quoted that day.

LADLE BUTTER.

Dairy butter of all kinds of quality, color and salting, as it is bought at the country stores is hard to sell, and for years it has been a business to collect this, grade it, recolor and salt it and work it together—a perfectly legitimate business until some of the better grades were branded "*Creamery*," and palmed off as such. The output of this was enormous, but has lately been reduced by the introduction of *imitation creamery*.

By this term was originally meant unsalted granular butter brought by farmers to a creamery where it was graded, colored, salted and worked. Later on the best grades of ladles were sold as such, while at the present time it means mostly

PROCESS BUTTER.

This is any kind of butter melted, the clear oil refined and reincorporated with good milk or cream. This is most unjustly compelled to be branded "*Renovated Butter*" in some states where Ladle Butter may be sold as "*creamery*." It is sold by the manufacturers in the west as "*Imitation Creamery*" and is a great improvement on ladles. But it is also retailed as "*Creamery*," the best selling within a few cents

of "extra" and thus in a way being a great detriment to the sale of the real "creamery." It has raised the value of seconds in "Dairy" and "Packing Stock" nearly fifty per cent.

The best grades are made of fine dairy butter.

FRAUDULENT BUTTERS.

During the last 20 years several so-called patent processes have been palmed onto the farmers. I believe first by a Mr. Guinness and later on by various persons selling "black pepsin," etc., etc., by the use of which nearly 10 pounds of so-called butter is obtained from 100 pounds of milk, testing 3.75 per cent fat, which *under no circumstances* can be made to yield more than *4.38 lbs. honest butter*. This is simply done by incorporating the curd with the butterfat by the aid of rennet and is more entitled to the name of soft cheese.

This is a fraud, but the stuff is not deleterious to health. Worse are those who use compounds into which chromate of lead and deleterious preservatives enter. Do not listen to any of that kind of proposition.

While we do not have any such laws, it would be perfectly fair to make it a criminal offense to sell butter with less than 80 per cent of fat.

WHEY BUTTER.

In making cheddar cheese there ought to be but little fat left in the whey, and it is a doubtful question whether it would pay to separate it. Otherwise with "Gouda," "Edam" and "Swiss" there is left enough to make it worth while. The whey is left to "cream" by gravitation and churned the usual way and the butter is, as a rule, pretty poor, though I have sampled some very good in England. By running the whey through a separator taking one-fifth as cream the first time and then running this through a second time, a churnable cream may be obtained which will give a very fair butter if the original milk was good. If the whey has been heated to 130 or 140 degrees as in Swiss cheesemaking, it may be advisable to use a starter, otherwise the cream is ripe enough as a rule shortly after separating.

DEVONSHIRE BUTTER.

The thick Devonshire cream before described is churned in a short time by stirring it by hand in a tub. This system obtains as yet to a certain extent in England.



THE DAIRYMAN'S

A B C




- A stands for **Award** of more than 120 first class prizes to Chr. Hansen's Danish Dairy Preparations.
- B stands for **Butter Color**, and none is equal to Chr. Hansen's.
- C stands for **Cleanliness** as well as for **Cheese Color**, liquid or in tablet form, and for **Columbian Butter Color**, the strongest and the cheapest.
- D stands for **Danish Butter Color**, made by Chr. Hansen, the purest and the best.
- E stands for **Extract of Rennet** and for **Excellence**.
- F stands for **Fine Flavor** of butter made with Chr. Hansen's Lactic Ferment.
- G stands for **Good** and for **Genuine**.
- H stands for **Hansen**, a name familiar to every dairyman from the cradle.
- I stands for **Imitations** to be avoided.
- J stands for **Junket Tablets**, for Dainty, Delicious Deserts.
- K stands for **Know**, as does every dairyman, that Chr. Hansen's are the best.
- L stands for **Lactic Ferment**, as well as for **Laboratory** and for **Little Falls, N. Y.**
- M stands for **Marschall Rennet Test** and for **Medals** received.
- N stands for **Natural Color**.
- O stands for **Original Inventions**.
- P stands for **Purity**.
- Q stands for **Quality**.
- R stands for **Rennet Extract** and **Rennet Tablets**, of highest quality.
- S stands for **Startoline**, made with Chr. Hansen's Lactic Ferment.
- T stands for **Tablets**, Rennet, Cheese Color or Junket.
- U stands for **Uniformity**.
- V stands for **Value** and for **Victory**.
- W stands for **Wealth** in store for the wide awake dairyman.
- X stands for **Xtra** fine butter and cheese.
- Y stands for **Yellow** color of the proper shade.
- Z stands for **Zealousness** in producing perfect goods, and that is the characteristic of

Chr. Hansen's Laboratory,

LITTLE FALLS, N. Y.

A. H. BARBER MANUFACTURING COMPANY,
229 South Water Street, Chicago, Ill.
CREAMERY AND DAIRY

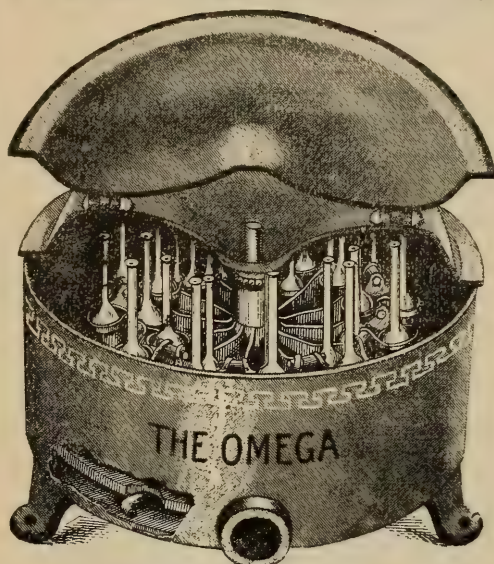

BABCOCK MILK TESTER.

**MACHINERY AND
SUPPLIES**
**ALPHA CREAM
SEPARATORS**
**W. & R. BUTTER
and CHEESE COLOR**
DAIRY SALT
**BUTTER TUBS
and PACKAGES**

—ALSO—

**REFRIGERATING
MACHINES**



SEND FOR CATALOGUE.

PROOF POSITIVE

Our recent Educational Butter Contest, held at Chicago, shows how perfect Butter can be made by the use of

Genesee Salt.

Out of 172 entries only 30 scored below 95 points, which is proof positive that GENESEE SALT is the salt that not only wins prizes but does much to enable makers to realize the highest market price for their product.


Genesee Salt is a Pure Salt

And is now used by the leading creamerymen of the United States. In ordering your supply of salt, ask for GENESEE.

The Genesee Salt Co.

6 Harrison Street, New York.

The One Successful Color.

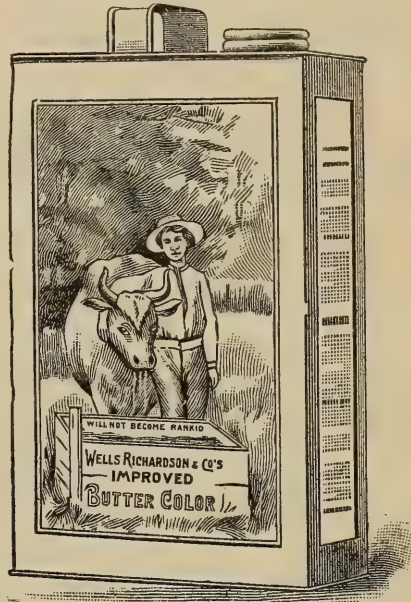

IT gives entire satisfaction and is the only color that buttermakers should use. It is the one color found in over ninety per cent of the creameries of the country. Butter containing Wells, Richardson & Co.'s Color has the highest standing in the market.

Wells,
Richardson
& Co.'s
Improved

There is Just One Perfect Color
and it is

“The Kind That Has No Mud.”

D. C. S.
MEANS
Dollars . and . Cents . Saved
OR
DIAMOND CRYSTAL SALT
WHICH IS THE SAME THING.


We have arranged the following for ready reference.

- D. C. Saves** because it is pure. You pay for less than 2 oz. of Lime to the barrel.
- D. C. Saves** because it is dry. Ordinary salt contains many times as much water.
- D. C. Saves** because it keeps dry. The Chlorides which draw moisture are not in the salt.
- D. C. Saves** because it stays in the butter. Fine salts will run out and waste.
- D. C. Saves** because staying in it takes less weight of salt to flavor the butter.
- D. C. Saves** because it preserves the best flavors which impure salt destroy.
- D. C. Saves** because it keeps in perfect condition being packed in chemically treated barrels. Woody flavors impossible.
- D. C. Saves** because the difference in weight of butter salted with D. C. and salted with ordinary salt will more than pay for all the salt used.
- D. C. Saves** all worry as to bad results from salt. You can refer right to the analysis and see that all we claim as to purity is true, or you can send to us for free sample sack, and test in any way you choose.

Don't forget the meaning of
D. C. S.

There is a charm in the letters that will lighten your burdens.

DIAMOND CRYSTAL SALT CO., St. Clair,
Mich.

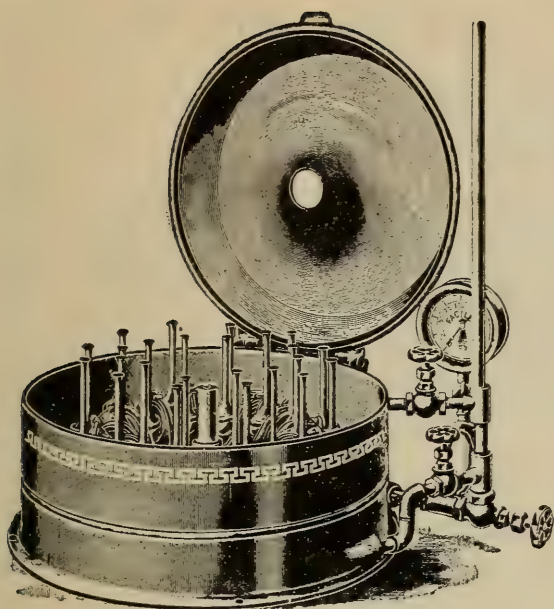

THE FACILE

Iron Frame
Steam Turbine

Babcock Tester.

Cast Brass Running Parts.
Only one Bearing to Oil.

Sent on Trial to any Responsible
Creameryman.

D. H. BURRELL & CO.,


LITTLE FALLS, N. Y.

MANUFACTURERS OF

Dairy, Creamery and Cheese Factory Machinery.

CAREFUL MAKERS USE

Boyd Cream Ripeners

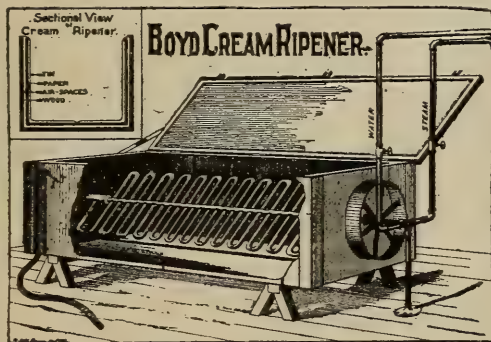

BECAUSE they insure uniformly high grade butter all the time. They develop aroma, flavor and texture. They augment the skill of the maker, and protect his reputation. Minnesota's famous buttermakers endorse them and use them in producing export

butter. Adapted alike to Dairy and Creamery. They interest the producer, maker and merchant. Does this interest you? Send for information.


CORNISH & CO.

ST. PAUL, MINNESOTA.

DEALERS IN DAIRY AND CREAMERY MACHINERY.

DISBROW

THE
Original

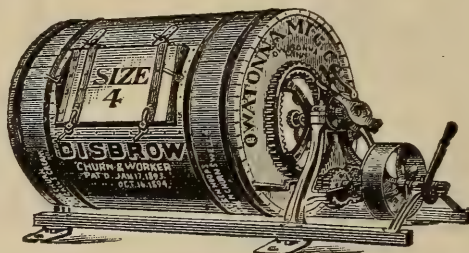

AND ONLY
Combined

Churn and Butter Worker

That Churns and Works the Butter on the
True Principle.

Brings the butter to the working rollers no faster than they can take care of it without rubbing the butter.

No solid mass of butter comes in contact with the rolls, to be scraped to pieces by the rolls and made salvy.

It is the only machine in which a large, or a small quantity of butter can be worked equally well.

It is the only combined machine in which butter has been made that scored 100 points.

It has gained more high scores than all other churns put together.

The manufacturers have never made any claims for it that were not fully proven by actual tests of the machine.

The DISBROW tells its own story, and a fair trial is all that is needed to prove its merits.

Owatonna Mfg. Company,

SOLE MANUFACTURERS,

OWATONNA, - - - MINNESOTA.

CREAMERY PACKAGE MFG. CO.,

GENERAL SALES AGENTS,

BRANCH HOUSES:

Minneapolis, Minn.
Waterloo, Iowa.

Kansas City, Mo.
Omaha, Neb.

1, 3 and 5 W. Washington St.,

CHICAGO, ILL.

Alpha De Laval Separators, Ideal Turbine Testers, Disbrow Churns, Elgin Style White Ash Tubs, Ideal Corrosive Sublimate Tables, Parchment Paper, Australian Boxes, Refrigerating Machinery, Boilers and Engines, American and Lusted Printers, Genesee Salt, Potts' Pasteurizer, Etc., Etc.

We are General Agents for Hansen's and W. & R. Butter Color.

When all Cleansing Powders have been tried, Savogran values are then appreciated.

HOUSE SAVOGRAN WHITE STAR

STANDARD CLEANING POWDERS FOR 25 YEARS.

INDIA ALKALI WORKS

28-37 India Wharf,
BOSTON

All First Medals: World's Fair, 1893. Silver, 1887. Bronze, 1873.

Cheesemakers Take Notice.

* * *

....YOU SHOULD READ....

A B C in Cheesemaking and

Cheesemaking in Switzerland.

It matters not what kind of cheese is to be made, reading about the others makes it easier to understand.

These two books are sent on receipt of \$1.00.

J. H. MONRAD,

Winnetka, Ill.



TABLE OF CONTENTS.

CHAPTER I.—THE MILK PRODUCTION.

	Page.
Which Cow Do You Milk?.....	4-5
Test Associations	6
What Feed to Use.....	7-10
What Care Do You Give Your Cows?.....	10-11
Milking	12-13
Better Care Needed for Milk Sent to Creameries.....	13
Cooling and Aerating	13-14
Straining	15

CHAPTER II.—RECEIVING MILK AT THE CREAM- ERY.

The Greatest Trial	17
Testing Milk	17-18
Getting a Fair Sample	18-19
The Fermentation Test	19-21

CHAPTER III.—RAISING THE CREAM.

Composition of Milk and Conditions Affecting Its Creaming	22
Shallow Setting	23
Deep Setting	23-26
Set According to Conditions	26
The Devonshire System	26
Principle of Creaming by Centrifugal Force.....	26-27
Condensed History of Cream Separators.....	27-33
Choosing a Separator	33
Comparing the Various Creaming Systems.....	33-34
Creaming Systems That Are Failures.....	34-36

CHAPTER IV.—SEPARATING.

Preparing the Milk for Separation	37
The Heaters	37-39
Filtering	39
Running the Separators	39

CHAPTER V.—CREAM RIPENING.

	Page.
No Uniform Rule Possible.....	40
Butter Flavor and Composition of Butterfat.....	40-42
Ripening Cream on the Farm.....	42-44
Cream Ripening in Creameries	45-48
Signs of Ripeness	48-49
The Acid Test	48-49
Starters	49-50

CHAPTER VI.—CHURNS AND CHURNING.

The Theory of Churning	51
Churning Temperatures	52-53
Churns	53-56
Combined Separators and Churns	57
Combined Churns and Butterworkers....	57-58
Handling the Churns	60-61
Cause of Foaming	61-62
Drawing Buttermilk and Washing	62

CHAPTER VII.—SALTING AND WORKING.

Brine Salting	63
The Object of Salting	63
Salt to Use.....	64-65
The Workers	65-67
Using Combined Churns and Workers.....	67-68
Preparing Lime Water	69
Beware of Frauds	69

CHAPTER VIII.—PACKAGES AND PACKING.

For the Small Dairy	70-71
For Creameries or Large Dairies....	71-74
Preparing the Package	74
Packing	74-75
Shipping and Marketing	76-77

CHAPTER IX.—ICE HOUSE AND REFRIGERATORS.

Everybody Should Put Up Ice.....	78
The Ice House	78-80
The Refrigerator	80-81

CHAPTER X.—PASTEURIZATION FOR BUTTER-
MAKING.

	Page.
Not the Same as for City Use.....	82
On the Dairy Farm	82-84
In the Creameries	84-86
The Body of Pasteurized Butter	86
What Temperature to Use.....	86-87

CHAPTER XI.—RETURNING THE SKIM MILK.

Skim Milk Weighers	88
Heating the Skim Milk	88-90

CHAPTER XII.—RUNNING BOILERS, ENGINES AND
SEPARATORS.

Boilers	90-93
Engines	93-94
Separators	95-96

CHAPTER XIII.—ORGANIZING CREAMERIES.

Co-operative Creameries	97-98
Individual Creameries	98
Combination System	98-99
Gathered "Separator Cream" Creameries.....	99-100
Skim Station System	100-101

CHAPTER XIV.—CREAMERY BUILDINGS.

Site and Surroundings	101
The Building	101-105

CHAPTER XV.


Dairy Education	105-106
-----------------------	---------

CHAPTER XVI.—VARIOUS KINDS OF BUTTER.

Market Grading of Butter	107
Ladle Butter	107
Imitation Creamery	107
Process Butter	107
Fraudulent Butter	108
Whey Butter	108
Devonshire Butter	108

DAIRYMEN SHOULD READ

Dairy and Creamery Papers and Books



"Hoard's Dairyman" (weekly), Fort Atkinson, Wis.....	\$1.00
"Creamery Gazette" (monthly), Des Moines, Iowa.....	1.00
"Chicago Dairy Produce" (weekly), Chicago, Ill.....	1.50
"The Practical Dairyman" (monthly), Indianapolis, Ind.....	.50
"New York Produce Review" (weekly), New York.....	1.00
"Creamery Journal" (monthly), Waterloo, Iowa.....	1.00
"American Cheesemaker" (monthly), Grand Rapids, Mich.....	.50
"Elgin Dairy Report" (weekly), Elgin, Ill.....	1.00
"The Dairy World" (monthly), Chicago, Ill.....	1.00
"American Dairyman" (weekly), New York.....	1.50
"The Milk News" (monthly), Chicago.....	1.00
"Pacific Coast Dairyman" (semi-monthly), Tacoma, Wash.....	1.00
"The Western Creamery" (monthly), San Francisco, Cal.....	1.00
"The Milk Reporter" (monthly), Deckertown, N. Y.	1.00
"The Dairy and Creamery" (semi-monthly), Chicago.....	1.00

"**A B C IN CHEESE MAKING,**" by J. H. Monrad. (Cheddar, Gouda, Skim Cheese, Brie, Neufchatel, Cottage and Whey Cheese. **Price, 50c**

"**PASTEURIZATION,**" by J. H. Monrad. **Price, 50c**

"**CHEESE MAKING IN SWITZERLAND,**" (Swiss, Brick and Limburger), by J. H. Monrad. **Price, 50c**

"**PATRONS' BULLETIN,**" by J. H. Monrad, (for Milk Producers). **Single Copy, 5c; per hundred, \$2.50,** buyer to pay express. This is especially adapted for distribution among patrons of creameries.

" Feeds and Feeding, " by Prof. W. A. Henry.....	\$2.00
"A Hand Book for Farmers and Dairymen," by Prof. Woll.....	1.50
"American Dairying," by H. B. Gurler.....	1.00
"Modern Dairying" (Grottenfelt), by Prof. F. W. Woll.....	2.00
" Dairy Bacteriology, " by Prof. H. L. Russell.....	1.00
"Cheese and Butter Makers' Hand Book," by J. B. Harris.....	1.00
"Cheddar Cheese Making," by Prof. J. W. Decker.....	1.00
"A Treatise on Cheese Making," by G. E. Newell.....	.50
" The Testing of Milk and Its Products, " by Profs. E. H. Farrington and F. W. Woll.....	1.00
"Indian Corn Culture," by Prof. C. S. Plumb.....	1.00
"Barn Building," by J. H. Saunders.....	1.50
"The Breeds of Live Stock," by J. H. Saunders.....	2.00
"Butter Fat and Dividend Calculator," by A. Schoenman.....	2.00

Mailed direct from publishers on receipt of price, at buyer's risk, (unless 9 cents extra is remitted for registration).

J. H. MONRAD, Winnetka, Cook Co., Ill.



ANOTHER "ALPHA" TRIUMPH

Royal Agricultural Society First Prizes

The "ALPHA" De Laval machines have just won another great victory over would-be competitive cream separators, in the practical working contest at the 1899 Annual Show, at Maidstone, Kent, of the Royal Agricultural Society of England.

This society is probably the most important agricultural body in the world, and its annual shows are the largest and most important of agricultural exhibitions and contests held anywhere. The society has conducted no cream separator contest since 1891, at which time the "ALPHA" disc machines first demonstrated their great superiority over the "hollow-bowl" type of separator construction, so that the contest to be held this year has attracted a great deal of attention everywhere with those interested in dairying matters, and especially among separator manufacturers. Different manufacturers, from various countries, sent not only their own special engineers to superintend the running of their respective machines, but in some instances the inventors or chief constructors themselves.

The Royal Agricultural Show test of separators is by all odds the most thorough and complete attempted by any society or institution anywhere, the work differing in some respects from that of the Experiment Stations, in that it is devised and conducted along the lines of practical operation, without regard to mere experimental possibilities. The test covered five days continuous running, every feature entering into the economical cost and practical efficiency of a separator being carefully analyzed, the Association's consulting engineer acting in conjunction with the official judges. The "points" taken into consideration were: Price, efficiency of separation, power taken per gallon, time taken per gallon, means of regulating thickness of cream, facility for dismantling and cleaning, mechanical construction, and freedom from froth, both from skim-milk and cream.

The contest was divided into two classes of machines—Hand and Power. There were six entries of Power and nine of Hand machines. The first prize was £2 or \$10.00 in each class.

THE "ALPHA" DE LAVAL MACHINES EASILY WON FIRST PRIZE IN EACH CLASS

which while no more than anyone familiar with separators would naturally have expected, is nevertheless the highest endorsement any agricultural implement could possibly receive, and an endorsement of such character that its weight must be recognized in every part of the world.

The De Laval Separator Co.

Western Offices:
Canal & Randolph Sts.
CHICAGO

General Offices:
74 Cortlandt Street
NEW YORK

Branch Offices:
1102 Arch Street
PHILAD'A